

DATA SHEET

Form 480-010131

Description

The PB16J and PB16K DC input racks provide 16 channels of optically-isolated inputs for sensing ON/OFF DC voltage levels.


All input circuitry is on the board and all channels are identical. There is no provision on the board for plug-in modules. Both models feature an extra row of terminal strips for power distribution. The PB16J and PB16K racks are smaller than a standard PB16H I/O mounting rack; the result is a 40 percent savings in cabinet space. Indicators are provided for all input channels and power.

Both the PB16J and PB16K racks feature a 50-pin header connector for easy interface to computer parallel I/O ports via 50-conductor ribbon cables. The 50-pin connector also allows direct connection to Mystic, Optomux, and Pamux brain boards.

The PB16J and PB16K DC Input racks are useful for connecting to the following devices:

- BCD Devices
- TTL Level Devices
- Thumbwheel Switches
- Bar Code Readers

Part Numbers	Description
PB16J	DC Input 4–6VDC 16-Channel Integral
PB16K	DC Input 16–28VDC 16-Channel Integral

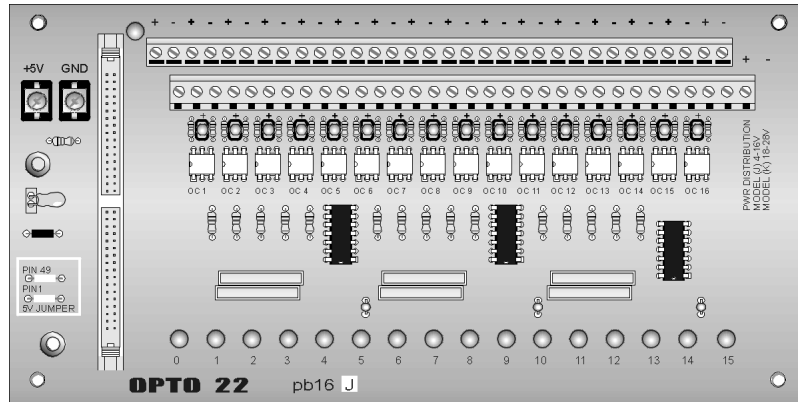

DATA SHEET


Form 480-010131

Specifications

PB16J/K Specifications

	PB16J	PB16K
Input Line Voltage	4–16 VDC	16–28 VDC
Input Current	3.3 mA @ 4 VDC 16 mA @ 16 VDC	3.4 mA @ 16 VDC 6.3 mA @ 28 VDC
Isolation Input-to-Output Channel-to-Channel	4,000 Vrms 300 Vrms continuous	4,000 Vrms 300 Vrms continuous
Capacitance Input-to-Output	8 pF/channel	8 pF/channel
Input Allowed For No Output	1 VDC (0.2 mA)	1 VDC (0.2 mA)
Turn-on Time	2.5 ms maximum	3 ms maximum
Turn-off Time	3.5 ms maximum	4.5 ms maximum
Logic Supply Voltage	4.5–6 VDC	4.5–6 VDC
Logic Supply Current	190 mA @ 5 VDC	190 mA @ 5 VDC
Operating Ambient Temperature	- 30° to 70° C	- 30° to 70° C

Dimensions

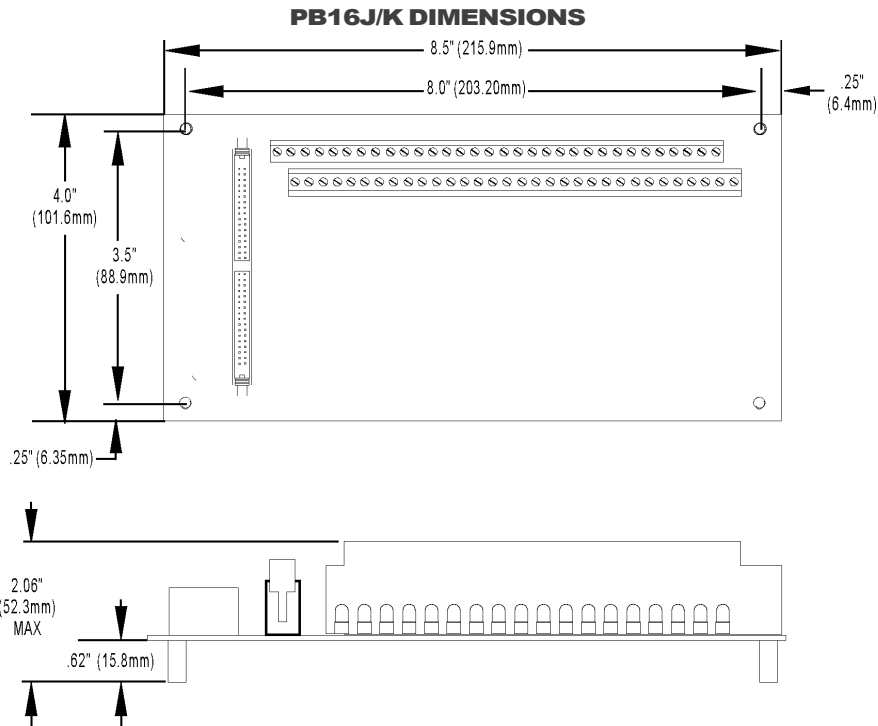

OPTO 22


DATA SHEET

Form 480-010131

RACKS
CLASSIC
INTEGRAL

page 3/3

Connections

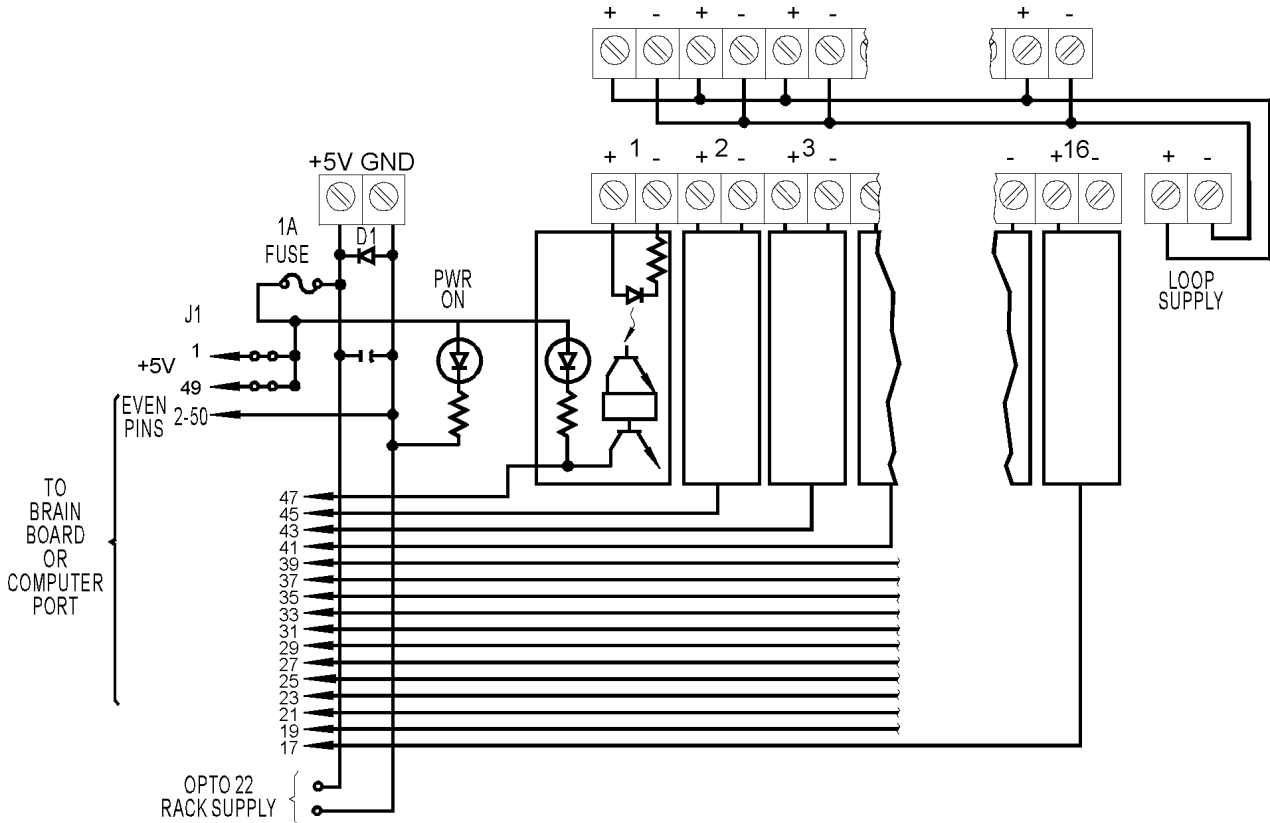

Products

Opto 22 produces a broad array of reliable, flexible hardware and software products for industrial automation, remote monitoring, enterprise data acquisition, and machine-to-machine (M2M) applications.

SNAP Ethernet Systems

Based on the Internet Protocol (IP), SNAP Ethernet systems offer flexibility in their network connectivity and in the software applications they work with. The physical network may be a wired Ethernet network, a cellular wireless network, or a modem. A wide variety of software applications can exchange data with SNAP Ethernet systems, including:

- Opto 22's own ioProject™ suite of control and HMI software
- Manufacturing resource planning (MRP), enterprise management, and other enterprise systems
- Human-machine interfaces (HMIs)
- Databases
- Email systems
- OPC client software
- Custom applications
- Modbus/TCP software and hardware.



SNAP Ethernet system hardware consists of controllers and I/O units. Controllers provide central control and data distribution. I/O units provide local connection to sensors and equipment.

SNAP OEM Systems

Opto 22 SNAP OEM I/O systems are highly configurable, programmable processors intended for OEMs, IT professionals, and others who need to use custom software with Opto 22 SNAP I/O modules.

Linux® applications running on these systems can read and write to analog, simple digital, and serial I/O points on SNAP I/O modules using easily implemented file-based operations. Applications can be developed using several common development tools and environments, including C or C++, Java, and shell scripts.



M2M Systems

Machine-to-machine (M2M) systems connect your business computer systems to the machines, devices, and environments you want to monitor, control, or collect data from. M2M systems often use wireless cellular communications to link remote facilities to central systems over the Internet, or to provide monitoring and control capability via a cellular phone.

Opto 22's Nvio™ systems include everything you need for M2M—interface and communications hardware, data service plan, and Web portal—in one easy-to-use package. Visit nvio.opto22.com for more information.

Opto 22 Software

Opto 22's ioProject and FactoryFloor® software suites provide full-featured and cost-effective control, HMI, and OPC software to power your Opto 22 hardware. These software applications help you develop control automation solutions, build easy-to-use operator interfaces, and expand your manufacturing systems' connectivity.



Quality

In delivering hardware and software solutions for worldwide device management and control, Opto 22 retains the highest commitment to quality. We do no statistical testing; each product is made in the U.S.A. and is tested twice before leaving our 160,000 square-foot manufacturing facility in Temecula, California. That's why we can guarantee solid-state relays and optically-isolated I/O modules *for life*.

Product Support

Opto 22's Product Support Group offers comprehensive technical support for Opto 22 products. The staff of support engineers represents years of training and experience, and can assist with a variety of project implementation questions. Product support is available in English and Spanish from Monday through Friday, 7 a.m. to 5 p.m. PST.

Opto 22 Web Sites

- www.opto22.com
- nvio.opto22.com
- www.internetio.com (live Internet I/O demo)

Other Resources

- OptoInfo CDs
- Custom integration and development
- Hands-on customer training classes.



About Opto 22

Opto 22 manufactures and develops hardware and software products for industrial automation, remote monitoring, enterprise data acquisition, and machine-to-machine (M2M) applications. Using standard, commercially available Internet, networking, and computer technologies, Opto 22's input/output and control systems allow customers to monitor, control, and acquire data from all of the mechanical, electrical, and electronic assets that are key to their business operations. Opto 22's products and services support automation end users, OEMs, and information technology and operations personnel.

Founded in 1974 and with over 85 million Opto 22-connected devices deployed worldwide, the company has an established reputation for quality and reliability.