

REVISIONS			DOC. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398						
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
886	B	RELEASED	HYO	2/9/00	JC	8/10/00	DJC	9/11/00	
1854	B	Update Specifications	HO	7/22/05	JWM	7/22/05	JWM	7/22/05	



Type No.
2390



SPECIFICATIONS:

Voltage:	120 V AC
Output:	1,500 watts
Temperature:	
Stage 1: 50 °C	120 °F
Stage 2: 50 °C - 650 °C	120 °F -1100 °F
Stage 3: 50 °C -650 °C	120 °F -1100 °F


(5 mm [1/5"] in front of the ejector tube)

Air Flow:

Stage 1: 250 litres/min	17.6 cfm
Stage 2: 270 litres/min	9.5 cfm
Stage 3: 500 litres/min	17.6 cfm

Weight:	870 g	30.7 oz.
Noise:	<70 dB (A)	<70 dB (A)

The built-in temperature sensor regulates and monitors electronically the temperature set, making it possible to use special reduction nozzles, and protecting the heating element from overheating

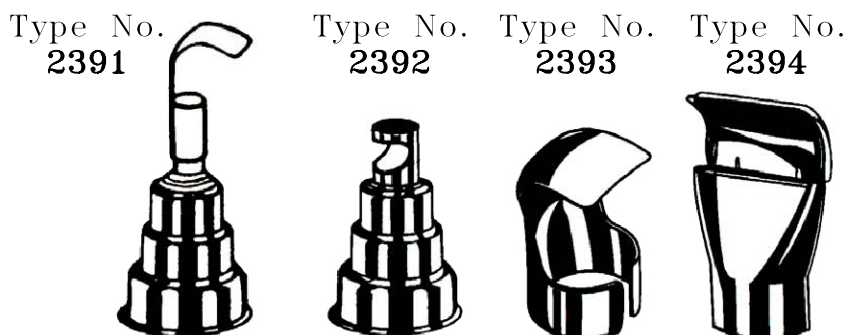

NOTE:
NOZZLES SOLD
SEPARATELY

SPC-F004.DWG

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:				
	HISHAM ODISH	2/9/00	HEAT GUN AND ACCESSORIES				
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV	
	JOHN COLE	8/10/00	A	TA-197	TA-197.DWG	A	
	APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 1	
	DANIEL CAREY	9/11/00					

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.