
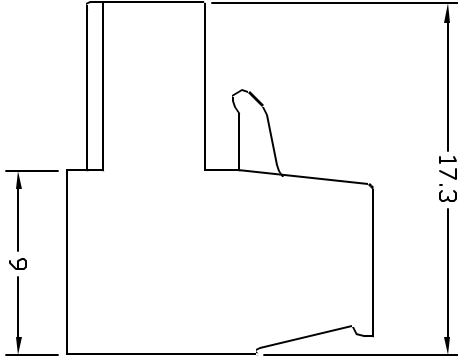


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS				DOC. NO. SPC-FD05	Effective 12/21/88				DCP No. 480
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
154	A	RELEASED	HYO	3/8/00	JC	4/5/00	DJC	4/5/00	

P = POLES

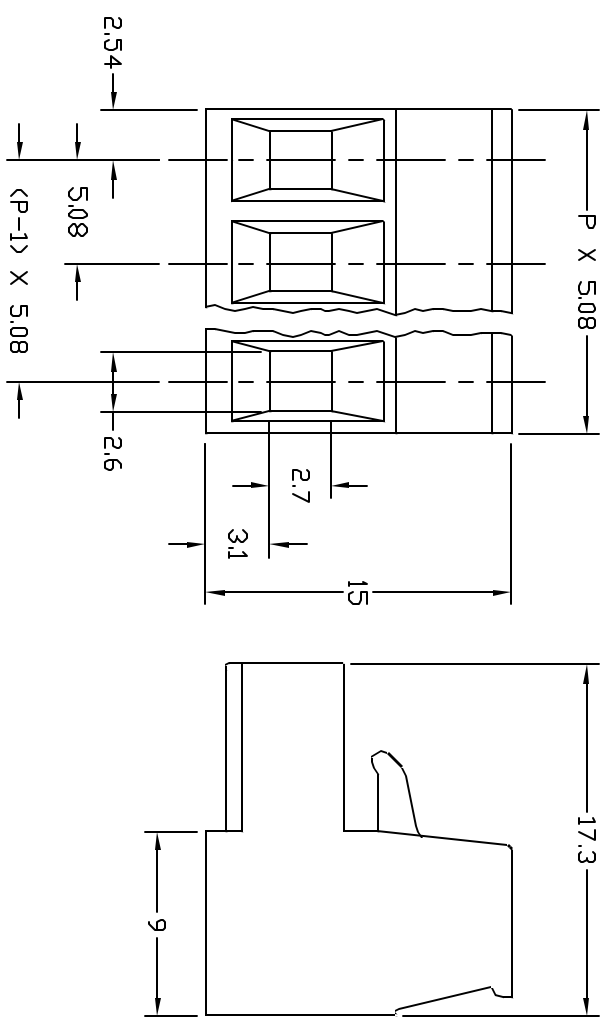


SPECIFICATIONS:
DESCRIPTION:
1. 5.08 MILLIMETERS SPACING

RATINGS:
1. VOLTAGE: 250V
2. CURRENT: 15A
3. WIRE SIZE: 22-12 AWG

MATERIALS:
1. INSULATING MATERIAL: PA
2. FLAMMABILITY CLASS: UL94V-0
3. TEMPERATURE RANGE: -30 °C to +105 °C
4. WIRE CAGE: CuZn
5. CONTACT: CuSn
6. COLOR: GREEN

SPC TYPE NO.	NO. OF POLES
3338	2
3339	3
1823	4
1824	5
1825	6
1826	7
1827	8
3340	9
3341	10
1830	12
1831	14
1832	16
1833	18
1834	20
3342	24

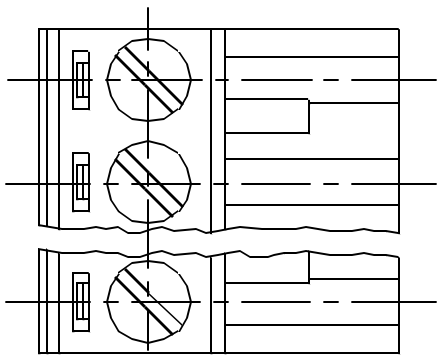

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:	DRAWING TITLE:	 SPC TECHNOLOGY			
HISHAM ODISH	3/8/00	HORIZONTAL PLUG, CAGE CLAMP, TERMINAL BLOCK				
CHECKED BY:	DATE:	SIZE DWG. NO.				
JOHN COLE	4/5/00	A TA-221				
APPROVED BY:	DATE:	SCALE: NTS	U.O.M.: MILLIMETERS	SHEET: 1	OF 1	REV
DANIEL CAREY	4/5/00					A