
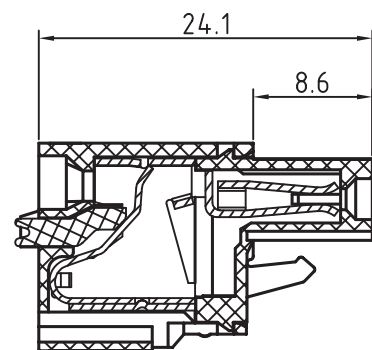
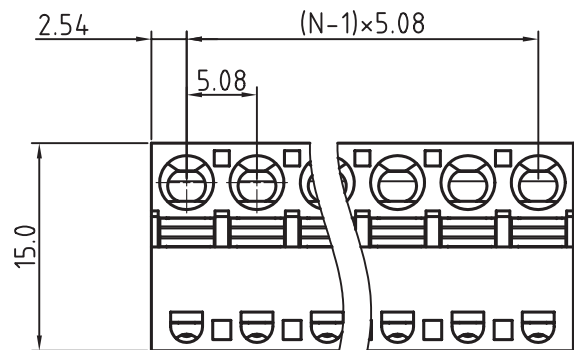


1 2 3 4 5

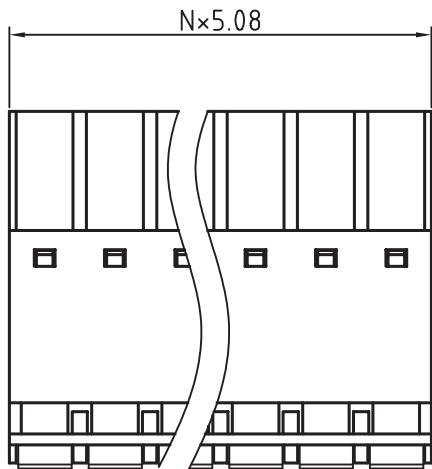

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: NYLON 66
 COLOR: GREEN
 METAL HOUSING: BRASS (CuZn)
 CONTACT: PhBz TIN PLATED
 WIRE GUARD: STAINLESS STEEL

ENVIRONMENTAL
 OPERATING TEMPERATURE: -30 UP TO 105°C
 FLAMABILITY RATING: UL94-V0
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	cULus	VDE
CURRENT RATING:	20A	20A
WORKING VOLTAGE:	300VAC	300VAC
WITHSTANDING VOLTAGE:	1.6KV	2.5KV

MECHANICAL	
SOLID WIRE:	12-26 AWG
STRANDED WIRE:	12-26 AWG

WIRE RANGE: 0.5 TO 2.5MM²
 WIRE STRIPE LENGTH: 6-7MM
 SCREW: M3
 PITCH: 5.08MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING
 BOX

SERIE 353

CERTIFICATION




A

B

C

D

RoHS Compliant			
G			
F			
E			
D			
C			
B	19-MAR-08	PAGE 2	CH
A	31-OCT-07	PDF	EC
REV	DATE	FILE	BY



GENERAL TOLERANCE
 .X = +/- 0.2
 .XX = +/- 0.15




APPROVAL: RJ



UNIT: MM
 SCALE:
 SHEET: 1/2
 DRAW: MARVIN

DESCRIPTION: 5.08MM GREEN PLUG VERTICAL CABLE ENTRY
 SCREWLESS
 WERI PART NO: 691 353 500 0xx

SIZE
A4

TEST POINTS DETAILS:

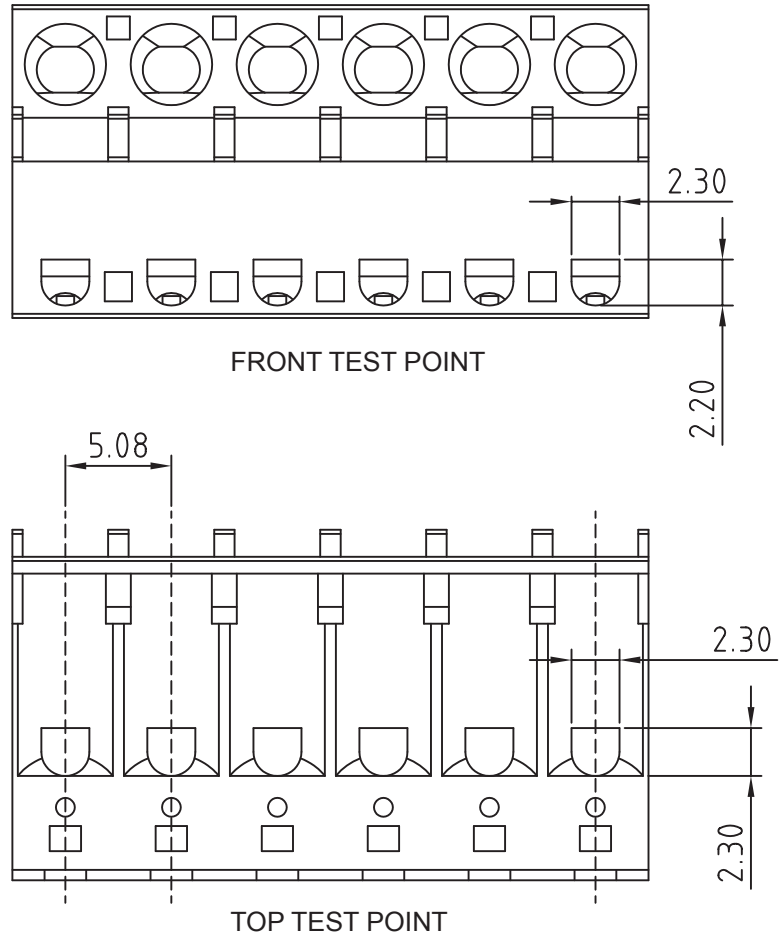

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: 5.08MM GREEN PLUG VERTICAL CABLE ENTRY SCREWLESS	SIZE A4
G								
F								
E								
D				APPROVAL: RJ	UNIT: MM	WERI PART NO: 691 353 500 0xx		
C					SCALE:			
B	19-MAR-08	PAGE 2	CH		SHEET:2/2			
A	31-OCT-07	PDF	EC		DRAW: MARVIN			
REV	DATE	FILE	BY					