

JTC04/06 Series



- 4:1 Input Range
- DIP-24 Metal Package
- Operating Temperature -40 °C to +100 °C
- Single & Dual Outputs
- Continuous Short Circuit Protection
- 1500 VDC Isolation
- 3000 VDC Isolation Optional

Specification

Input

- Input Voltage Range
 - 24 V (9-36 VDC)
 - 48 V (18-72 VDC)
- Input Current
 - See table
- Input Filter
 - Pi network
- Input Reflected Ripple
 - 35 mA pk-pk through 12 μ H inductor, 5 Hz to 20 MHz

Output

- Output Voltage
 - See table
- Output Voltage Balance
 - $\pm 1\%$ max, dual output models
- Minimum Load
 - No minimum load required
- Initial Set Accuracy
 - $\pm 1\%$ max
- Start Up Delay
 - <800 ms
- Start Up Rise Time
 - <10 ms
- Line Regulation
 - $\pm 0.5\%$ max
- Load Regulation
 - $\pm 0.5\%$ max
- Cross Regulation
 - $\pm 5\%$ on dual output models
- Transient Response
 - <1.5% max deviation, recovery to within 1% in 200 μ s for a 50% load change
- Ripple & Noise
 - 60 mV pk-pk for 3.3 V to 15 V models, 100 mV pk-pk for 18 V models, 150 mV pk-pk for 24 V models, 20 MHz BW
- Short Circuit Protection
 - Trip & restart (hiccup) with auto recovery
- Maximum Capacitive Load
 - See tables
- Temperature Coefficient
 - $\pm 0.02/^{\circ}\text{C}$ max

General

- Efficiency
 - See tables
- Isolation
 - 1500 VDC Input to Output, for optional high isolation version 3000 VDC input to output add suffix '-H' to model number
 - 1000 VDC Input to Case
 - 1000 VDC Output to Case
- Isolation Capacitance
 - 500 pF max
- Switching Frequency
 - 266 kHz typical
- MTBF
 - >1 Mhrs to MIL-STD-217F

Environmental

- Operating Temperature
 - -40 °C to +100 °C, derate from 100% load at +85 °C to no load at +100 °C
- Case Temperature
 - +100 °C max
- Storage Temperature
 - -40 °C to +125 °C
- Humidity
 - Up to 90%, non-condensing
- Cooling
 - Natural convection

EMC

- Emissions
 - EN55022 Class A conducted with external components - see application note
- ESD Immunity
 - EN61000-4-2, 8 kV air discharge Perf Criteria A, 4 kV contact discharge Perf Criteria A
- Radiated Immunity
 - EN61000-4-6 Level 2 3 V/m Perf Criteria A

Input Voltage	Output Voltage	Output Current	Input Current ⁽²⁾		Maximum Capacitive Load ⁽³⁾	Efficiency	Model Number ⁽¹⁾
			No Load	Full Load			
9-36 V	3.3 V	1200 mA	12 mA	220 mA	1000 µF	75%	JTC0424S3V3
	5.0 V	800 mA	15 mA	211 mA	1000 µF	79%	JTC0424S05
	9.0 V	445 mA	12 mA	203 mA	220 µF	79%	JTC0424S09
	12.0 V	333 mA	15 mA	203 mA	220 µF	82%	JTC0424S12
	15.0 V	267 mA	15 mA	203 mA	220 µF	82%	JTC0424S15
	18.0 V	223 mA	15 mA	203 mA	10 µF	82%	JTC0424S18
	24.0 V	167 mA	18 mA	203 mA	220 µF	82%	JTC0424S24
	±3.3 V	±606 mA	12 mA	220 mA	470 µF	75%	JTC0424D03
	±5.0 V	±400 mA	15 mA	211 mA	100 µF	79%	JTC0424D05
	±9.0 V	±222 mA	15 mA	208 mA	47 µF	80%	JTC0424D09
	±12.0 V	±167 mA	15 mA	203 mA	47 µF	82%	JTC0424D12
	±15.0 V	±134 mA	20 mA	208 mA	10 µF	80%	JTC0424D15
	±24.0 V	±84 mA	18 mA	208 mA	22 µF	80%	JTC0424D24
	18-72 V	3.3 V	1200 mA	10 mA	110 mA	1000 µF	76%
5.0 V		800 mA	8 mA	106 mA	470 µF	79%	JTC0448S05
9.0 V		445 mA	10 mA	100 mA	330 µF	83%	JTC0448S09
12.0 V		333 mA	12 mA	104 mA	1000 µF	80%	JTC0448S12
15.0 V		267 mA	10 mA	99 mA	47 µF	84%	JTC0448S15
18.0 V		223 mA	10 mA	99 mA	10 µF	84%	JTC0448S18
24.0 V		167 mA	15 mA	99 mA	22 µF	82%	JTC0448S24
±3.3 V		±606 mA	10 mA	107 mA	680 µF	78%	JTC0448D03
±5.0 V		±400 mA	15 mA	106 mA	330 µF	79%	JTC0448D05
±9.0 V		±222 mA	18 mA	104 mA	47 µF	80%	JTC0448D09
±12.0 V		±167 mA	12 mA	102 mA	100 µF	82%	JTC0448D12
±15.0 V		±134 mA	15 mA	104 mA	100 µF	80%	JTC0448D15
±24.0 V		±84 mA	15 mA	103 mA	33 µF	81%	JTC0448D24


Input Voltage	Output Voltage	Output Current	Input Current ⁽²⁾		Maximum Capacitive Load ⁽³⁾	Efficiency	Model Number ⁽¹⁾
			No Load	Full Load			
9-36 V	3.3 V	1400 mA	12 mA	253 mA	1000 µF	76%	JTC0624S3V3
	5.0 V	1200 mA	10 mA	312 mA	1000 µF	80%	JTC0624S05
	9.0 V	667 mA	12 mA	301 mA	220 µF	83%	JTC0624S09
	12.0 V	500 mA	15 mA	301 mA	1000 µF	83%	JTC0624S12
	15.0 V	400 mA	18 mA	301 mA	470 µF	83%	JTC0624S15
	18.0 V	334 mA	15 mA	301 mA	47 µF	83%	JTC0624S18
	24.0 V	250 mA	18 mA	305 mA	47 µF	82%	JTC0624S24
	±3.3 V	±900 mA	12 mA	338 mA	470 µF	74%	JTC0624D03
	±5.0 V	±600 mA	10 mA	312 mA	680 µF	80%	JTC0624D05
	±9.0 V	±330 mA	18 mA	309 mA	100 µF	81%	JTC0624D09
	±12.0 V	±250 mA	20 mA	301 mA	330 µF	83%	JTC0624D12
	±15.0 V	±200 mA	22 mA	305 mA	100 µF	82%	JTC0624D15
	±24.0 V	±125 mA	18 mA	312 mA	22 µF	80%	JTC0624D24
	18-72 V	3.3 V	1400 mA	15 mA	126 mA	1000 µF	76%
5.0 V		1200 mA	8 mA	156 mA	1000 µF	80%	JTC0648S05
9.0 V		667 mA	10 mA	153 mA	220 µF	82%	JTC0648S09
12.0 V		500 mA	10 mA	151 mA	1000 µF	83%	JTC0648S12
15.0 V		400 mA	10 mA	149 mA	100 µF	84%	JTC0648S15
18.0 V		334 mA	10 mA	151 mA	10 µF	83%	JTC0648S18
24.0 V		250 mA	12 mA	151 mA	22 µF	83%	JTC0648S24
±3.3 V		±900 mA	10 mA	162 mA	330 µF	77%	JTC0648D03
±5.0 V		±600 mA	10 mA	158 mA	470 µF	79%	JTC0648D05
±9.0 V		±330 mA	15 mA	154 mA	100 µF	81%	JTC0648D09
±12.0 V		±250 mA	10 mA	152 mA	100 µF	82%	JTC0648D12
±15.0 V		±200 mA	15 mA	149 mA	47 µF	84%	JTC0648D15
±24.0 V		±125 mA	15 mA	156 mA	22 µF	80%	JTC0648D24

Notes

- For optional 3000 VDC isolation add suffix '-H' to model number.
- Input current measured at nominal input voltage.
- Maximum capacitive load is per output.

Mechanical Details and Application Note

All dimensions are in inches (mm) Weight: 0.04 lbs (20 g) approx.

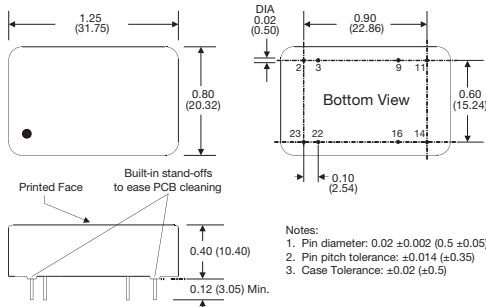

Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

Input Filter

