
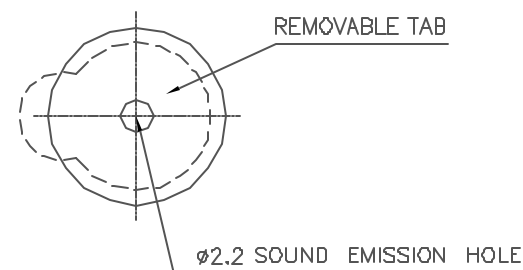



SPECIFICATIONS

PARAMETERS	VALUES	UNITS
Rated Voltage (Square Wave)	5	Vp-p
Operating Voltage	3 ~ 8	Vp-p
Rated Current (typ.)	40	mA
Coil Resistance	47±20%	Ohm
Typical Sound Pressure Level @ 10 cm.	85	dBA
Resonant Frequency	2400	Hz
Operating Temperature Range	-40 ~ +85	°C
Storage Temperature Range	-40 ~ +85	°C
Housing Material	Noryl SEI-GFN2J	
Terminal	Tin-Plated Copper Pins	
Weight	2	g

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	05/01/02	

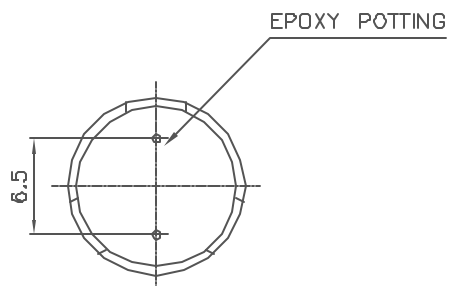

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ± 0.0 ±
XXX ±



Dayton, Ohio

AUDIO TRANSDUCER
AT-08

APPROVALS	DATE
DRAWN <i>RABL</i>	05/02
CHECKED	
APPROVED <i>S. J.</i>	05/01/02
DO NOT SCALE DRAWING	

SIZE A	MATERIAL	DRAWING NO. AT08.DWG
SCALE 2/1	MAX. WT.	SHEET 1 OF 1

DRAWING NAME
AT08