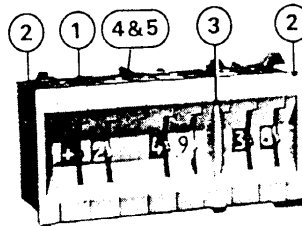
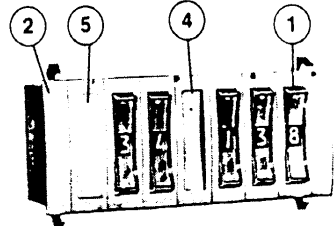
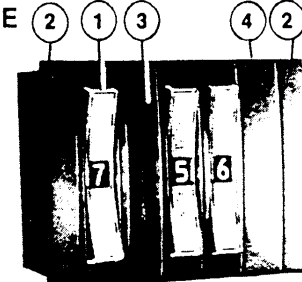
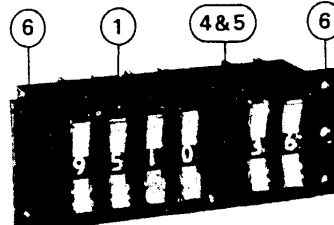
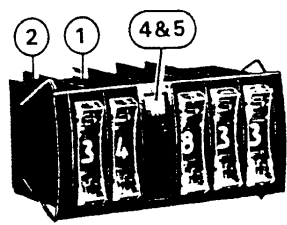
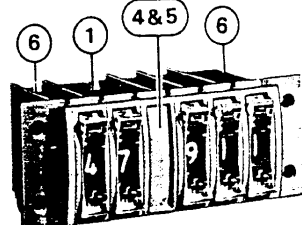
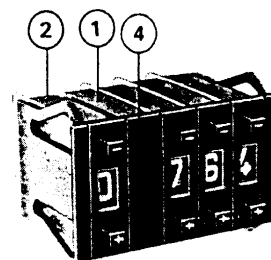

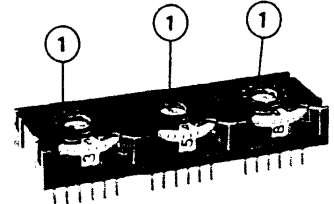


1143 616-40620


## Index

<p><b>STANDARD</b></p>  <p><b>84 210</b> Thumbwheel Standard – Panel Mount Page 5</p>	<p><b>STANDARD</b></p>  <p><b>84 211</b> Rocker Standard – Panel Mount Page 6</p>	<p><b>LARGE</b></p>  <p><b>84 212</b> Rocker Large – Panel Mount Page 7</p>
<p><b>STANDARD</b></p>  <p><b>84 213</b> Rocker Standard – Rear Mount Page 8</p>	<p><b>MINIATURE</b></p>  <p><b>84 214</b> Rocker Miniature – Panel Mount Page 9</p>	<p><b>MINIATURE</b></p>  <p><b>84 218</b> Rocker Miniature – Rear Mount Page 10</p>
<p><b>MINIATURE</b></p>  <p><b>84 230</b> Push Button Miniature – Panel Mount Page 12</p>	<p><b>SUBMINIATURE</b></p>  <p><b>84 231</b> Push Button Subminiature – Panel Mount Page 13</p>	 <p><b>84 235</b> Thumbwheel PCB – Flat Mount Page 14</p>

- 1 – **Basic Module:** Enable data input in coded form.
- 2 – **End Caps:** Snap into place to complete module assembly. Complete with 4 panel clips.
- 3 – **Separator:** Used to fit 2 switch assemblies into one unit. They come with 2 clips.
- 4 – **Spacer:** Blank module used to replace a module assembly.
- 5 – **Encoded “Dummy” Module:** Enables simultaneous switching to two circuits from one digital switch, it is driven by the adjacent module via a coupling shaft.
- 6 – **End Caps:** For rear mounting of module assembly. They come in pairs.

Other Index Items	Page
General Information .....	3
Truth Tables .....	11 & 15
How To Order – (Switches) .....	16
L.E.D. Readout .....	17-22
How To Order – (L.E.D. Readouts) .....	23

## General Information

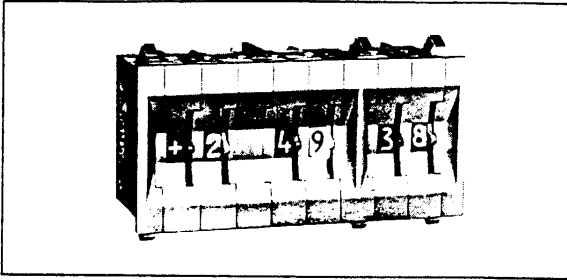


### Wheel Marking

- Large size figures or symbols give maximum readability.
- Complies with European Aeronautics standard BN Aë – NFL 70130.
- Special markings are available on request.


### Assembly Series: 84210, 84211, 84212, 84213, 84214, 84218

- Modules snap into place – easily disassembled
- No mounting hardware needed

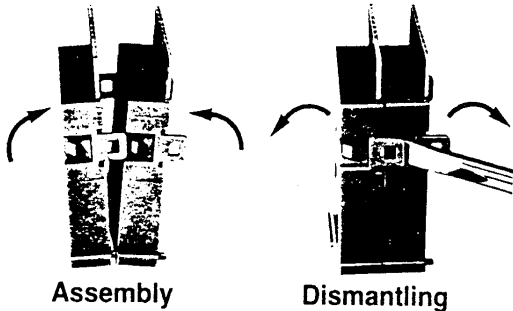


### Assembly Series: 84230, 84231, 84235

- Snap fit – No tools, no hardware



### Clip Mounting Series 84210, 48211, 84212, 84213, 84214, 84218


- Two clip assembly combination available: Panel thickness – .06 - .14 in. (1.5 - 3.5mm) Panel thickness – .126 - .24 in. (3.2 - 6mm).
- Clips supplied in pairs with end plates or spacers.



Dimensions in inches (mm)

### Series 84230, 84231, 84235

- No clip mounting necessary
- Clips molded in end caps

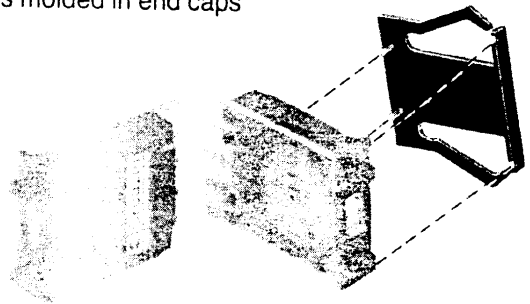

### Colors




- Standard modules come in black (grey upon request).
- Standard wheels are black or red with white markings.
- Optional wheels: (except series 84230, 84231, 84235) Green or blue with white markings. Yellow with black markings

### Dial Stops

- Limit the rotation of the dial to any number of positions, to be specified when ordering.

### Circuit Boards


- All our digital switches are provided with printed circuit boards made of glass-filled P.C. 75 epoxy composite board, .03 in. (.08 mm) thick, covered with copper plated with nickel and gold.
- Two types of circuit boards are available: Short for direct connection or long for component mounting such as resistors or diodes, in series or parallel. (See photos).
- **Note** 84231 – MO1 and MO3: no long circuit board and no hole on circuit available.




## Switch Terminations and Connectors

### Terminals


- Three types of terminations:  
 Direct soldering or plug-in for connectors (S)  
 Pins for wire wrapping (X2) – Except Series 84230, 84231, 84235  
 Pins for P.C. board soldering (X3).



S









X2



X3


### Connectors (for Series 84210, 84211, 84212, 84213)

- Connectors available:  
 Solder terminals (W2)  
 Wire wrap terminals (X2)  
 P.C. board solder terminals (X3).

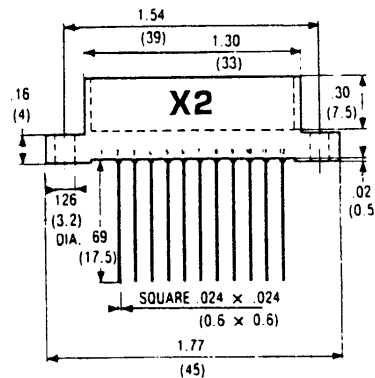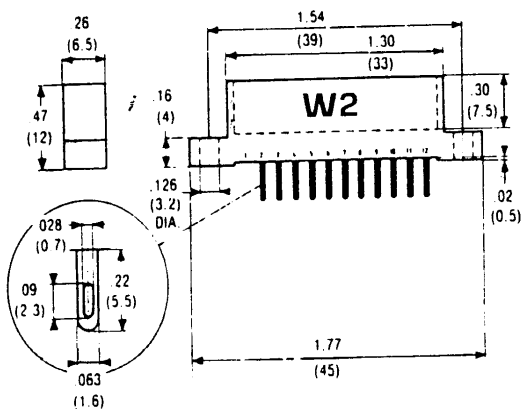

Dimensions in inches (mm)







## Thumbwheel - standard - panel mount Series 84 210

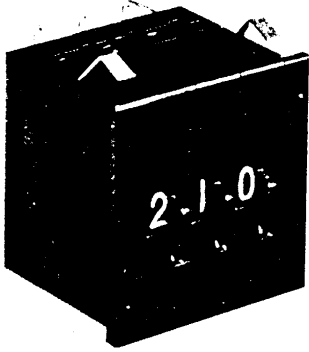


- Large numerals — .18 in. (4.5 mm) high
- All modules easily assembled without hardware
- Black or red wheels standard—other colors on request
- Right-sided circuits — left-sided optional
- Modules will accommodate our L.E.D. readouts

Mechanical & Electrical Specifications		Materials
<p><b>Operating Voltage:</b> .1 to 250 V AC .1 to 50 V DC</p> <p><b>Nominal Electrical Load (Resistive Load):</b> .1 mA to 100 mA</p> <p><b>Maximum Non-Switching Load:</b> 1 A</p> <p><b>Contact Resistance:</b> 70 mΩ max.</p> <p><b>Life at 50 V DC, .1 A, Resistive Load:</b> 1 million operations</p> <p><b>Note:</b> For voltages and currents less than the above values, please consult us.</p>	<p><b>Dielectric Strength:</b> 600 V</p> <p><b>Operating Temperatures:</b> —13° F. to 158° F. (—25° C. to 70° C.)</p> <p><b>Storage Temperatures:</b> —40° F. to 185° F. (—40° C. to 85° C.)</p> <p><b>Dial Character Dimensions:</b> .18 in. x .11 in. (4.5 mm x 2.8 mm)</p> <p><b>Operating Torque:</b> 10 oz. ( 300 g)</p>	<p><b>Case:</b> Noryl</p> <p><b>Wheel:</b> Delrin</p> <p><b>Contacts and Tracks:</b> Copper—Nickel—Gold</p> <p><b>Brush:</b> Beryllium bronze</p> <p><b>Printed Circuit Board:</b> Glass-filled epoxy (P.C. 75)</p>

**Option:** The P.C. boards of the standard 84 210 type modules are mounted on the right side of the module. The decimal and BCD codes can, optionally, be mounted onto the left side of the module. In this case the outputs are **as shown below**. Please contact us.
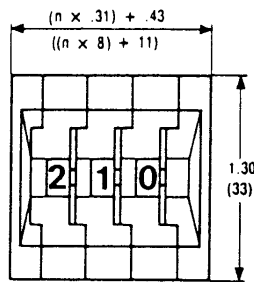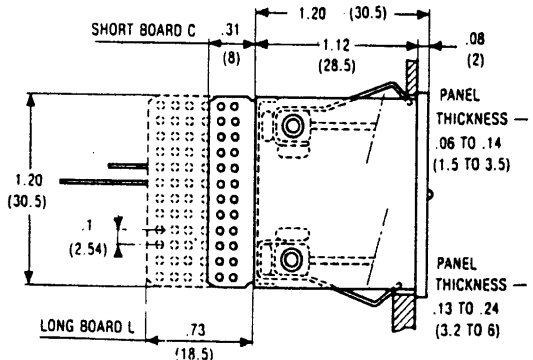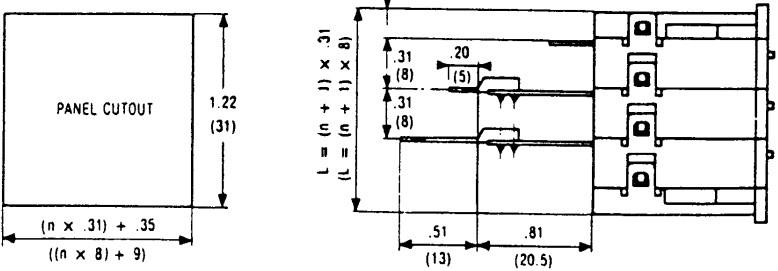
<p><b>Standard:</b></p>  <p><b>Option:</b></p>  <p><b>Decimal M 09</b></p>  <p><b>BCD M10</b></p>	<p><b>Dimensions in inches (mm)</b></p>   
--	--

## Rocker Switch - standard - panel mount Series 84 211

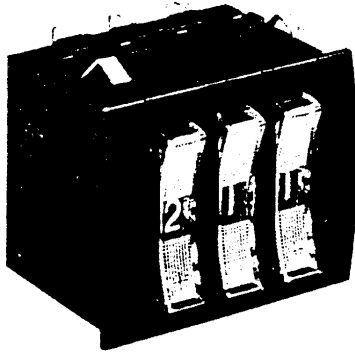

- Fast switching in both directions
- Large numerals — .18 in. (4.5 mm) high
- All modules easily assembled without hardware
- Good looking—easy to read
- Black or red wheels standard — other colors on request

### Mechanical & Electrical Specifications

**Operating Voltage:** .1 to 250 V AC  
.1 to 50 V DC

**Nominal Electrical Load (Resistive Load):** .1 mA to 100 mA

**Maximum Non-Switching Load:** 1 A

**Contact Resistance:** 70 mΩ max.

**Life at 50 V DC, .1 A, Resistive Load:** 1 million operations

**Note:** For voltages and currents less than the above values, please consult us.

**Dielectric Strength:** 600 V

**Operating Temperatures:** —13° F. to 158° F. (—25° C. to 70° C.)

**Storage Temperature:** —40° F. to 185° F. (—40° C. to 85° C.)

**Dial Character Dimensions:** .18 in. x .11 in. (4.5 mm x w.8 mm)

**Operating Force at End of Rocker:** 17 oz. (500 g)

### Materials

**Case:** Noryl

**Wheel:** Delrin

**Rocker Actuator:** Makrolon\* (Polycarbonate)


**Contracts and Tracks:** Copper—Nickel—Gold

**Brush:** Beryllium bronze


**Printed Circuit Board:** Glass-filled epoxy (P.C. 75)

\*Special elements not used in other manufacturers' products.

### Dimensions in inches (mm)

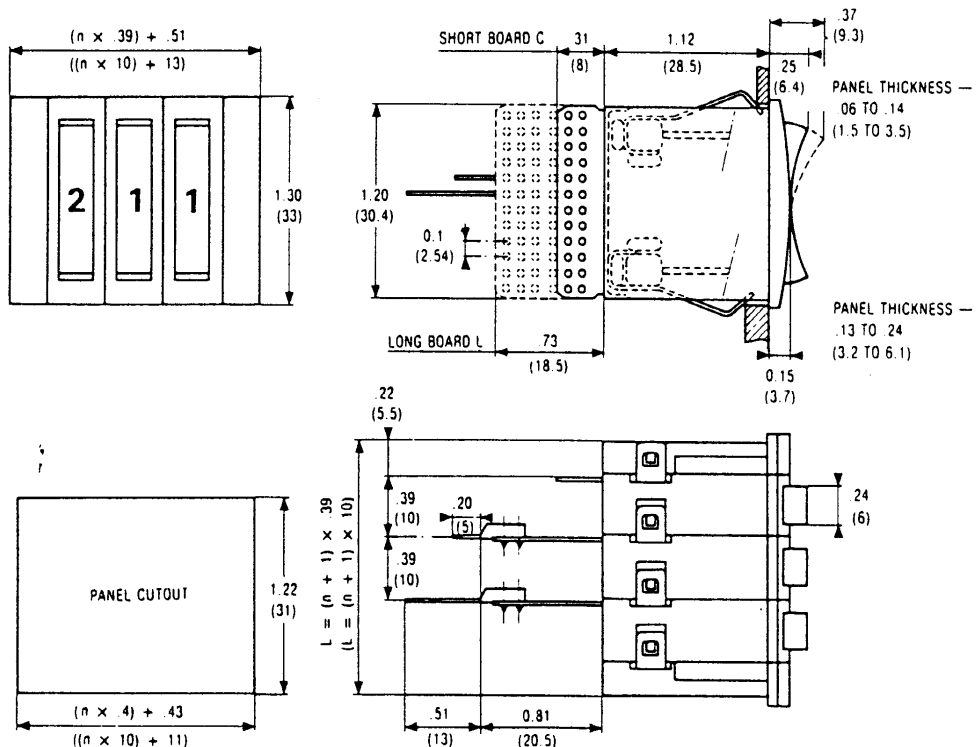

## Rocker Switch - large - panel mount Series 84 212

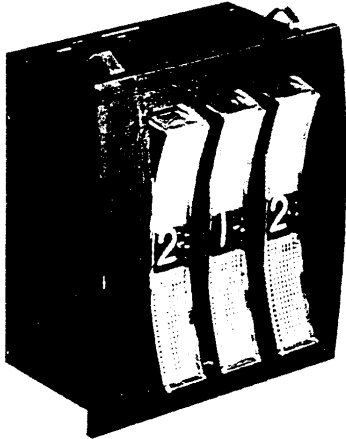

- Fast switching with large rocker actuator
- Extra large numerals — .24 in. (6 mm) high for easy reading
- All modules easily assembled without hardware
- Attractive

### Mechanical & Electrical Specifications


**Operating Voltage:** .1 to 250 V AC  
 .1 to 50 V DC  
**Nominal Electrical Load (Resistive Load):**  
 .1 mA to 100 mA  
**Maximum Non-Switching Load:** 1 A  
**Contact Resistance:** 70 mΩ max.  
**Life at 50 V DC, .1A, Resistive Load:** 1 million operations  
**Note:** For voltages and currents less than the above values, please consult us.

**Dielectric Strength:** 600 V  
**Operating Temperatures:** —13° F. to 158° F. (—25° C. to 70° C.)  
**Storage Temperatures:** —40° F. to 185° F. (—40° C. to 85° C.)  
**Dial Character Dimensions:** .24 in. x .15 in. (6 mm x 3.75 mm)  
**Operating Force at End of Rocker:** 10 oz. (300 g)

### Materials


**Case:** Noryl  
**Wheel:** Delrin  
**Rocker Actuator:** Makrolon\* (Polycarbonate)  
**Contacts and Tracks:** Copper—Nickel—Gold  
**Brush:** Beryllium bronze  
**Printed Circuit Board:** Glass-filled epoxy (P.C. 75)  
 \*Special elements not used in other manufacturers' products.

### Dimensions in inches (mm)

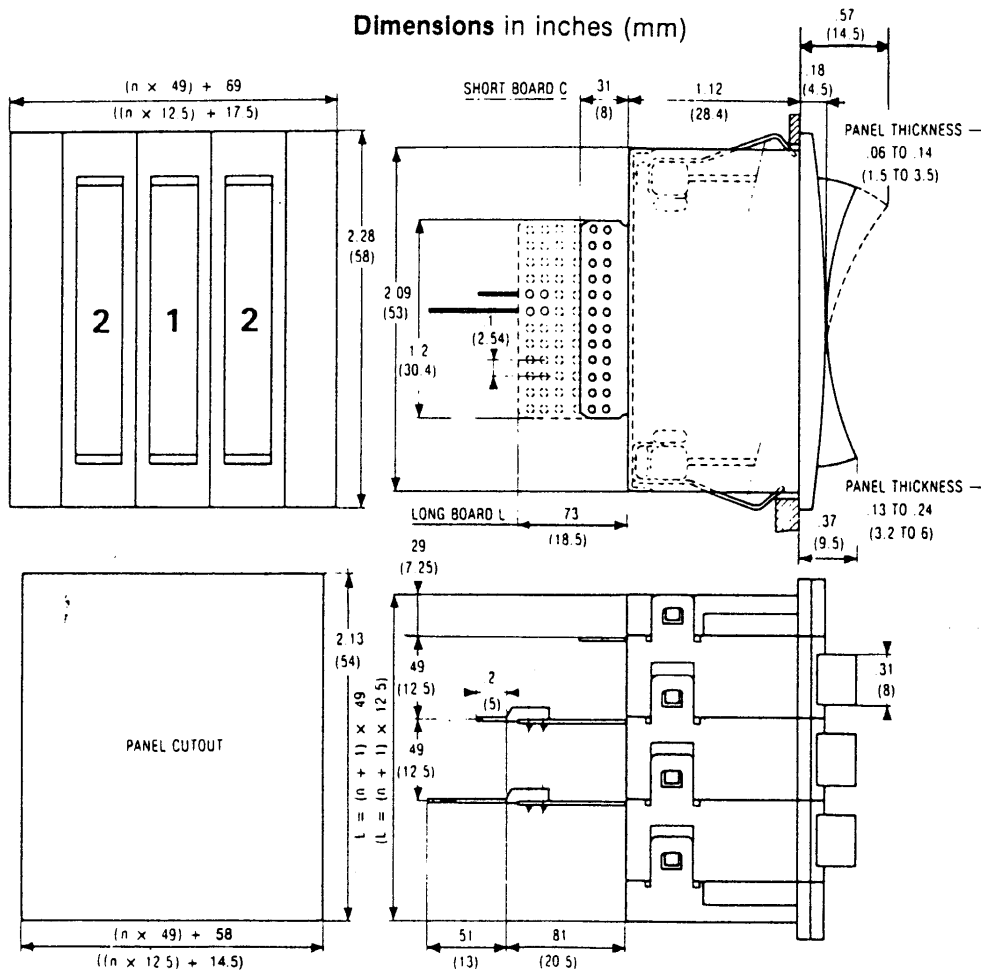



### Truth Tables - Series 84 210 - 84 211 - 84 212 - 84 213 - 84 214 - 84 218

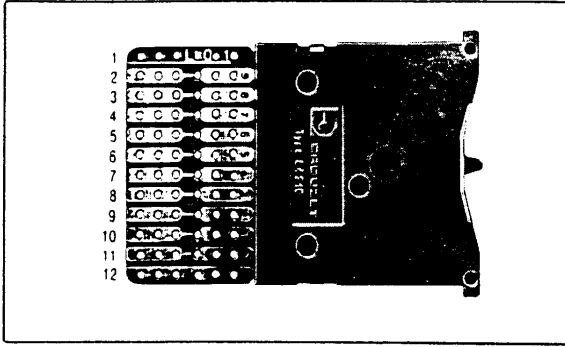

This photograph shows the numbering of each terminal for location purposes only.

The dots indicate the inter-connected tracks for each of the dial settings.

Decimal M01—M13—M14 (see note)

		C	0	1	2	3	4	5	6	7	8	9
Location on PC Board		12	11	10	9	8	7	6	5	4	3	2
Dial Setting	0	•	•									
	1	•		•								
	2	•			•							
	3	•				•						
	4	•					•					
	5	•						•				
	6	•							•			
	7	•								•		
	8	•									•	
	9	•										•

B.C.D.—M02

		C	1	2	4	8
Location on PC Board		9	8	7	6	5
Dial Setting	0	•				
	1	•	•			
	2	•		•		
	3	•	•	•		
	4	•			•	
	5	•	•		•	
	6	•		•	•	
	7	•	•	•		
	8	•				•
	9	•	•			•

B.C.D. + Complement—M03

		C	1	2	4	8	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
Location on PC Board		7	6	5	4	3	11	10	9	8
Dial Setting	0	•					•	•	•	•
	1	•	•					•	•	•
	2	•		•			•		•	•
	3	•	•	•				•		•
	4	•			•			•	•	•
	5	•	•		•				•	•
	6	•		•	•			•		•
	7	•	•	•	•				•	•
	8	•				•	•	•	•	
	9	•	•			•		•	•	

2 Position Repeating—M04

Type of Track		C	1	2
Location on PC Board		2	9	8
Dial Setting (To be specified)	+	5	•	•
	-	0	•	•
	+	5	•	•
	-	0	•	•
	+	5	•	•
	-	0	•	•
	+	5	•	•
	-	0	•	•
	+	5	•	•
	-	0	•	•

B.C.D. Complement—M07

Type of Track		C	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
Location on PC Board		3	4	11	2	10
Dial Setting	0	•	•	•	•	•
	1	•		•	•	•
	2	•	•		•	•
	3	•			•	•
	4	•	•	•		•
	5	•		•		•
	6	•	•		•	•
	7	•				•
	8	•	•	•	•	
	9	•		•	•	

B.C.D. EXCESS 6 + Complement—M08

Type of Track		C	1	2	4	8	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
Location on PC Board		7	6	5	4	3	11	10	9	8
Dial Setting	0	•		•	•		•			•
	1	•	•	•	•	•				•
	2	•					•	•	•	•
	3	•	•				•	•	•	•
	4	•		•			•	•	•	•
	5	•	•	•	•		•		•	
	6	•			•	•	•	•		•
	7	•	•		•	•		•		•
	8	•		•	•	•	•		•	
	9	•	•	•	•	•			•	

Hexadecimal B.C.D. - M 29\*

		C	1	2	4
Location on PC Board		7	11	9	2
Dial Setting	0	•			
	1	•	•		
	2	•		•	
	3	•	•	•	
	4	•			•
	5	•	•	•	•
	6	•		•	•
	7	•	•	•	•
	8	•			•
	9	•	•		
	10	•		•	
	11	•	•	•	
	12	•			•
	13	•	•	•	
	14	•	•	•	•
	15	•	•	•	•

\*84 210 only

Note: In decimal and BCD the following alternatives are available.\*


	Short Board	Long Board for Mounting of Resistors or Diodes	
		In Series on Each Track (Interrupted Tracks)	In Parallel from Track to Track (Non-Interrupted Tracks)
Break Before Make	MO 1-C (Decimal) MO 2-C (BCD)	MO 1-L (Decimal) MO 2-L (BCD)	M 14-L (Decimal) M 15-L (BCD Complement)
Make Before Break (on Request)	M 13-C (Decimal)	M 13-L (Decimal)	

\*Please consult us for special codes.



# Digital Switches

## Push Button - miniature - panel mount Series 84 230

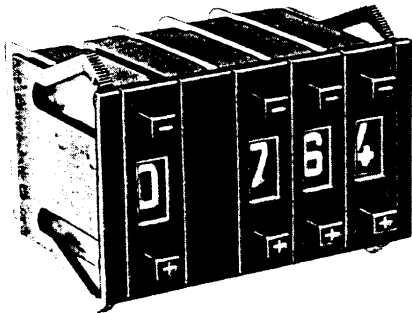

- Long circuit boards have track interruption to allow series mounting of components
- All modules easily assembled without hardware
- Black wheel standard – white wheel with black marking on request
- Fast, smooth switching action

### Mechanical & Electrical Specifications

**Max. operating voltage:**

switched 50 VAC  
unswitched 120 VAC

**Rated amperage:** switched 1-50mA

**Max. amperage:** unswitched 500mA

**Min. contact resistance:** .1 ohm

**Min. insulation resistance:** 100,000 megohms

**Dielectric strength:**

between tracks: 500 VAC

between tracks and ground: 2,500 VAC

**Operating temperature:**

+ 15°F to + 160°F (–10°C to + 70°C)

**Storage temperature:**

–40°F to + 185°F (–40°C to + 85°C)


**Mechanical life:**

500,000 operations


### Materials

**Case and wheel:** polycarbonate  
**Push Buttons and thumbwheel:** Delrin  
**Printed circuit board:** epoxy glass  
**Printed contact:** gold deposit  
**Contacts:** tin plated

### Panel cutout and front face dimensions in inches (mm)

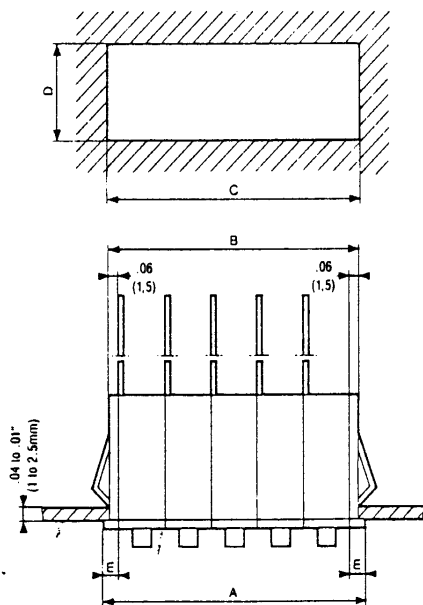

### Dimensions in inches (mm)

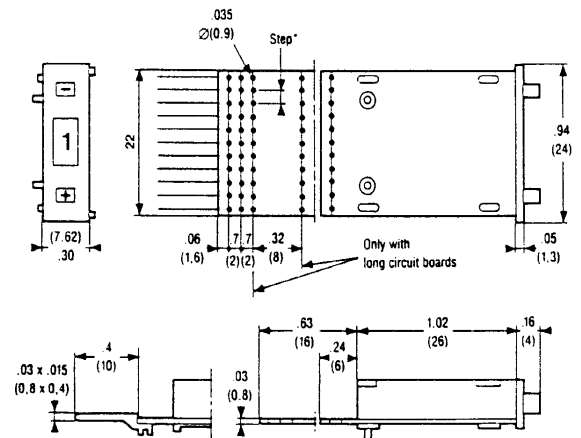


\*Step: .08 (2) – M01, M03, M04, M30  
Step: 1 (2.54) – M29 – M31  
Step: 2 (5.08) – M02 – M07

### Series 84 230

A (.30 x n) + .24 inches	(7.62 x n) + 6mm
B (.30 x n) + .12 inches	(7.62 x n) + 3mm
C (.30 x n) + .14 inches	(7.62 x n) + 3.5mm
D .89 inches	22.5mm
E .12 inches	3mm

# Crouzet® Digital Switches

## Push Button - subminiature - panel mount Series 84 231

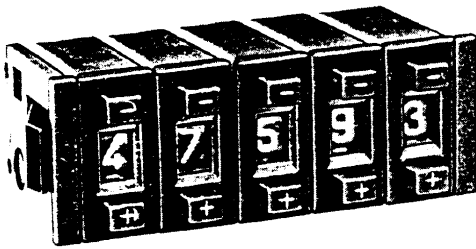

- Subminiature size – only .59 inch high
- All modules easily assembled without hardware
- Black wheel standard – white wheel with black markings on request
- Fast, smooth switching action

### Mechanical & Electrical Specifications

**Max. operating voltage:**

switched 50 VAC  
unswitched 120 VAC

**Rated amperage:** switched 1-50mA

**Max. amperage:** unswitched 500mA

**Min. contact resistance:** .1 ohm

**Min. insulation resistance:** 1,000 megohms

**Dielectric strength:**

between tracks: 500 VAC

between tracks and ground: 2,500 VAC

**Operating temperature:**

+ 15°F to + 160°F (-10°C to + 70°C)

**Storage temperature:**

-40°F to + 185°F (-40°C to + 85°C)


**Mechanical life:**

500,000 operations


### Materials

**Case and wheel:** polycarbonate  
**Push Buttons and thumbwheel:** Delrin  
**Printed circuit board:** epoxy glass  
**Printed contact:** gold deposit  
**Contacts:** tin plated

### Panel cutout and front face dimensions in inches (mm)

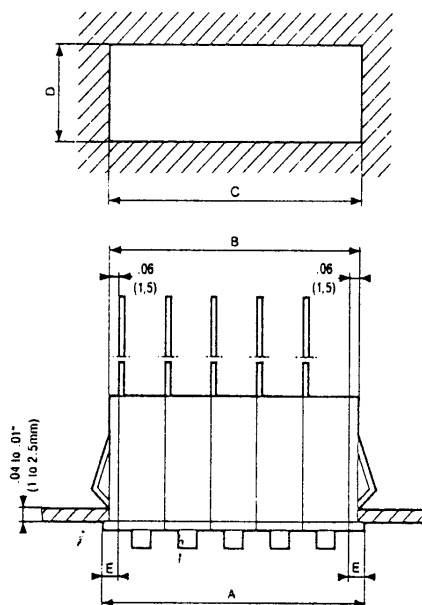

### Dimensions in inches (mm)

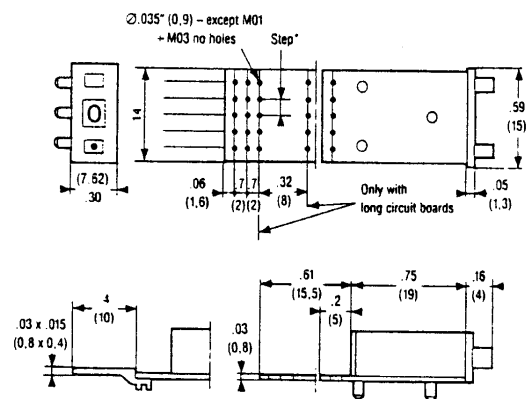


\*Step: .08 (2) - M01  
Step: 1 (2.54) - M02, M03, M04, M07

### Series 84 231

A (.30 x n) + .20 inches	(7.62 x n) + 5.08mm
B (.30 x n) + .12 inches	(7.62 x n) + 3mm
C (.30 x n) + .14 inches	(7.62 x n) + 3.5mm
D .57 inches	14.5mm
E .10 inches	2.54mm

## Thumbwheel - flat PCB mount Series 84 235

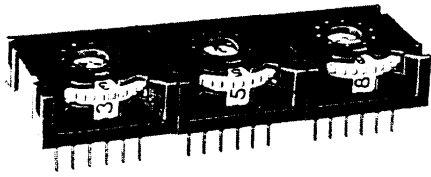

- Low profile – specially designed for PCB mounting
- All modules easily assembled without hardware
- Black or red wheels standard – white wheel with black marking on request
- Fast, smooth switching action

### Mechanical & Electrical Specifications

**Max. operating voltage:**

36 VDC/150 VAC

**Rated amperage:** switched 1-100mA

**Max. amperage:** unswitched 500mA

**Min. contact resistance:** .1 ohm

**Min. insulation resistance:** 1,000 megohms

**Dielectric strength:**

between tracks: 500 VAC

between tracks and ground: 2,500 VAC

**Operating temperature:**

+15°F to +160°F (–10°C to +70°C)

**Storage temperature:**

–40°F to +185°F (–40°C to +85°C)

**Mechanical life:**

250,000 operations

### Materials

**Case and wheel:** polycarbonate


**Thumbwheel:** Delrin

**Printed circuit board:** epoxy glass

**Printed contact:** gold deposit

**Contacts:** tin plated

### Dimensions in inches (mm)

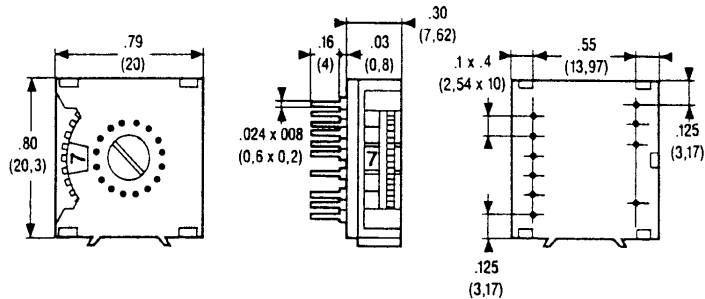

# Crouzet® Digital Switches

## Truth Tables - Series 84 230, 84 231, and 84 235

The dots indicate the inter-connected tracks for each of the dial settings.

B.C.D.		M02	
		C	1 2 4 8
Location on PC Board	84 230	10	2 4 6 8
	84 231	5	1 2 3 4
	84 235	7	12 10 8 4
Dial Setting	0	•	
	1	•	•
	2	•	•
	3	•	•
	4	•	•
	5	•	•
	6	•	•
	7	•	•
	8	•	•
	9	•	•

B.C.D. + Complement		M03	
		C	1 2 4 8 1 2 4 8
Location on PC Board	84 230	10	2 4 6 8 3 5 7 9
	84 231	5	10 9 8 7 1 2 3 4
	84 235	2	8 12 11 3 5 1 9 4
Dial Setting	0	•	• • • •
	1	•	• • • •
	2	•	• • • •
	3	•	• • • •
	4	•	• • • •
	5	•	• • • •
	6	•	• • • •
	7	•	• • • •
	8	•	• • • •
	9	•	• • • •

B.C.D. Complement		M07	
		C	1 2 4 8
Location on PC Board	84 230	4	2 6 8 10
	84 231	5	1 2 3 4
	84 235	8	12 10 4 2
Dial Setting	0	•	• • • •
	1	•	• • • •
	2	•	• • • •
	3	•	• • • •
	4	•	• • • •
	5	•	• • • •
	6	•	• • • •
	7	•	• • • •
	8	•	• • • •
	9	•	• • • •

2 Position Repeating		M04	
		C	1 2
Location on PC Board	84 230	1	2 11
	84 231	2	3 4
	84 235	7	4 8
Dial Settings (To be specified)	+ 5	•	•
	- 0	•	•
	+ 5	•	•
	- 0	•	•
	+ 5	•	•
	- 0	•	•
	+ 5	•	•
	- 0	•	•

Hexadecimal B.C.D.		M29	
		C	1 2 4 8
Location on PC Board	84 230	5	4 7 6 8
	84 235	8	12 2 10 4
		7	
Dial Setting	0	•	
	1	•	•
	2	•	•
	3	•	•
	4	•	•
	5	•	•
	6	•	•
	7	•	•
	8	•	•
	9	•	•
	A	•	•
	B	•	•
	C	•	•
	D	•	•
	E	•	•
	F	•	•

Hexadecimal B.C.D. + Complement		M30	
		C	1 2 4 8 1 2 4 8
Location on PC Board	84 230	10	3 5 9 7 4 2 8 6
	84 231	4	10 11 12 8 3 2 1 5
	84 235	6	
Dial Setting	0	•	• • • •
	1	•	• • • •
	2	•	• • • •
	3	•	• • • •
	4	•	• • • •
	5	•	• • • •
	6	•	• • • •
	7	•	• • • •
	8	•	• • • •
	9	•	• • • •
	A	•	• • • •
	B	•	• • • •
	C	•	• • • •
	D	•	• • • •
	E	•	• • • •
	F	•	• • • •


  

Hexadecimal B.C.D. Complement Only		M31	
		C	1 2 4 8
Location on PC Board	84 230	8	4 6 7 5
	84 231	8	12 2 10 4
	84 235	7	
Dial Setting	0	•	• • • •
	1	•	• • • •
	2	•	• • • •
	3	•	• • • •
	4	•	• • • •
	5	•	• • • •
	6	•	• • • •
	7	•	• • • •
	8	•	• • • •
	9	•	• • • •
	A	•	• • • •
	B	•	• • • •
	C	•	• • • •
	D	•	• • • •
	E	•	• • • •
	F	•	• • • •

Decimal		M01	
		C	0 1 2 3 4 5 6 7 8 9
Location on PC Board	84 230	1	11 2 3 4 5 6 7 8 9 10
	84 231	9	6 1 11 2 10 3 8 4 7 5
	84 235	7	5 12 11 10 9 8 1 2 3 4
Dial Setting	0	•	•
	1	•	•
	2	•	•
	3	•	•
	4	•	•
	5	•	•
	6	•	•
	7	•	•
	8	•	•
	9	•	•


### Terminal Configuration

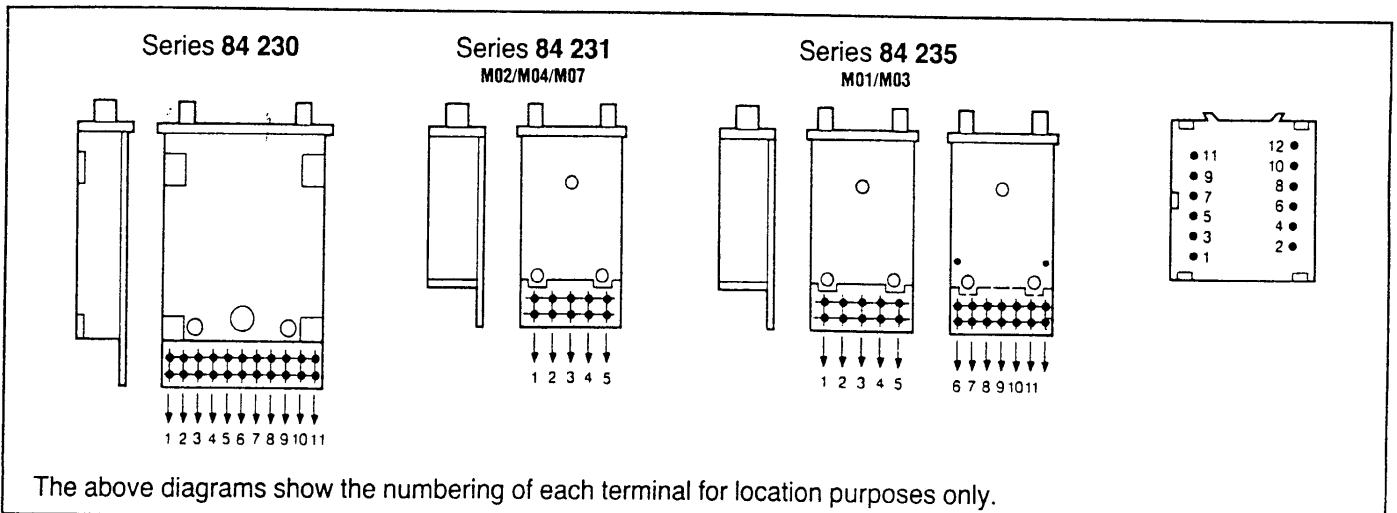

The above diagrams show the numbering of each terminal for location purposes only.

Please consult us for special codes.

## How to Order

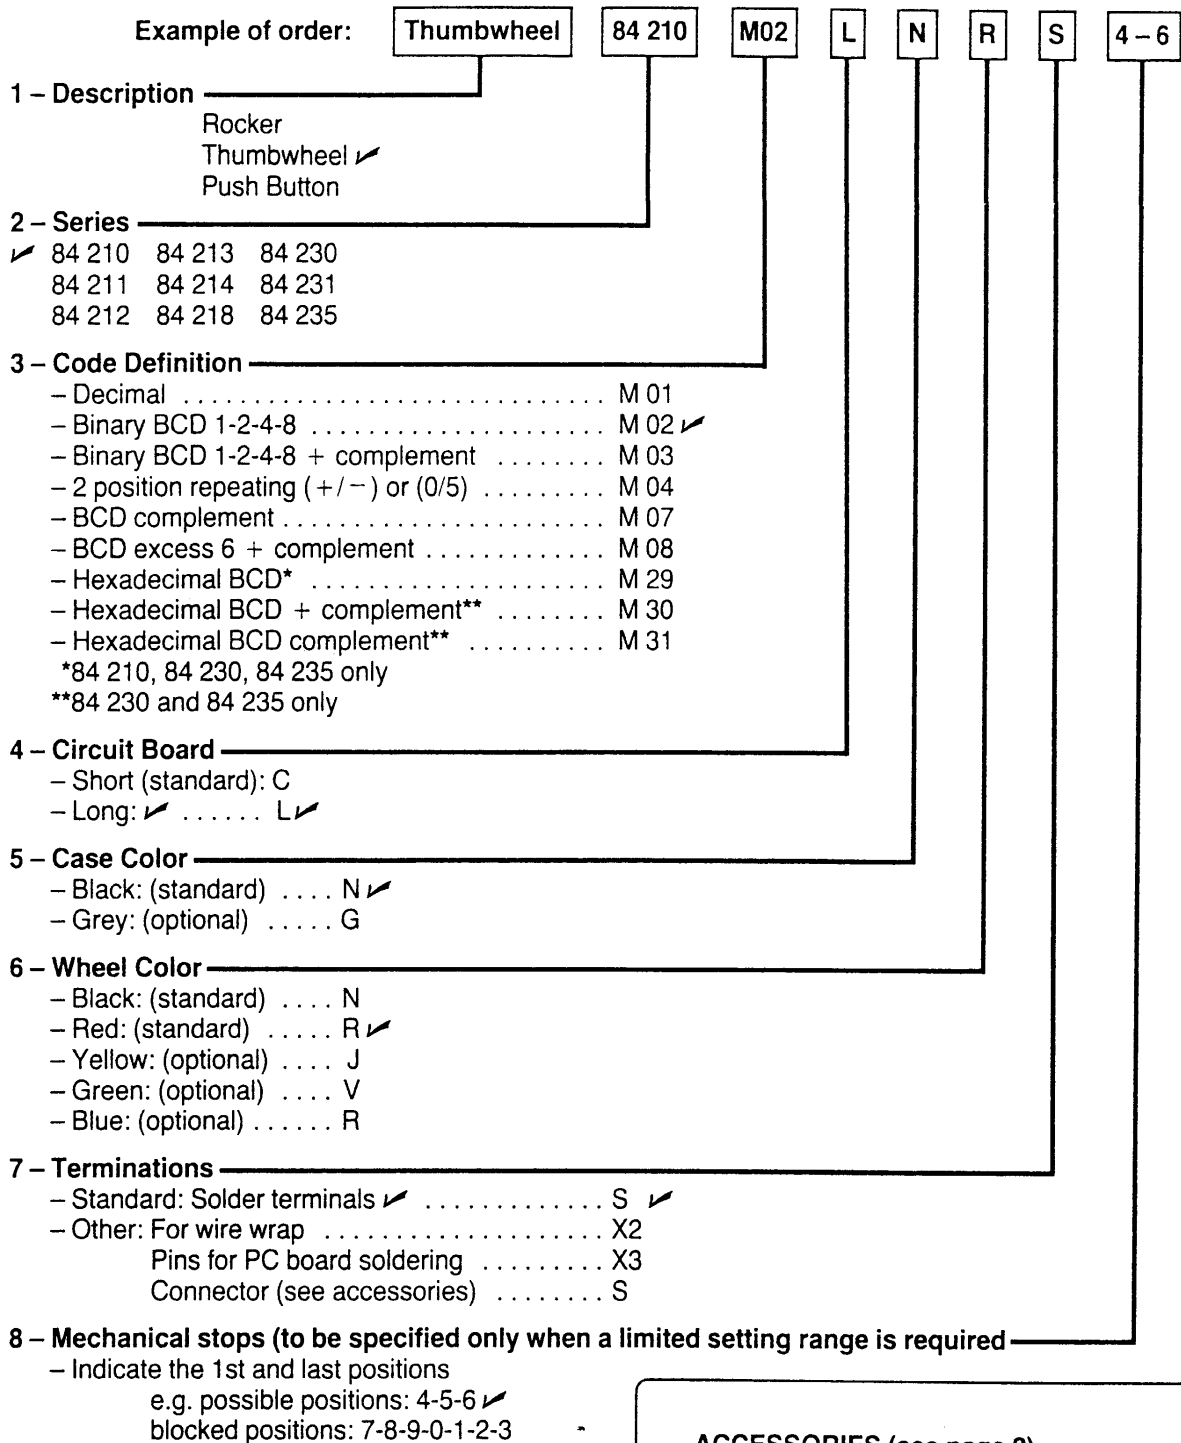


**Above example to be read as:**  
 1 – Thumbwheel switch  
 2 – 84 210  
 3 – binary BCD 1-2-4-8 – M 02  
 4 – Long circuit board  
 5 – Black case  
 6 – Red wheel  
 7 – Standard solder terminals  
 8 – Possible positions 4-5-6

**ACCESSORIES (see page 2)**  
 (specify digital switch series number)


- **Pair of End Caps including Clips. JE/**  
 (color: N – black: standard G – grey: optional)
- **Spacer: MI**
- **Encoded “Dummy” Module: MC** – also specify code, circuit board, color connections
- **Separator including Clips: MS**
- **Connector for Plugging of Circuit C:**  
 CR/W2-Solder Terminals  
 CR/X2-Wire Wrapping Terminals  
 CR/X3-PC Board Pins

# **Crouzet**® Digital Switches

## L.E.D. Readouts - 3 main families

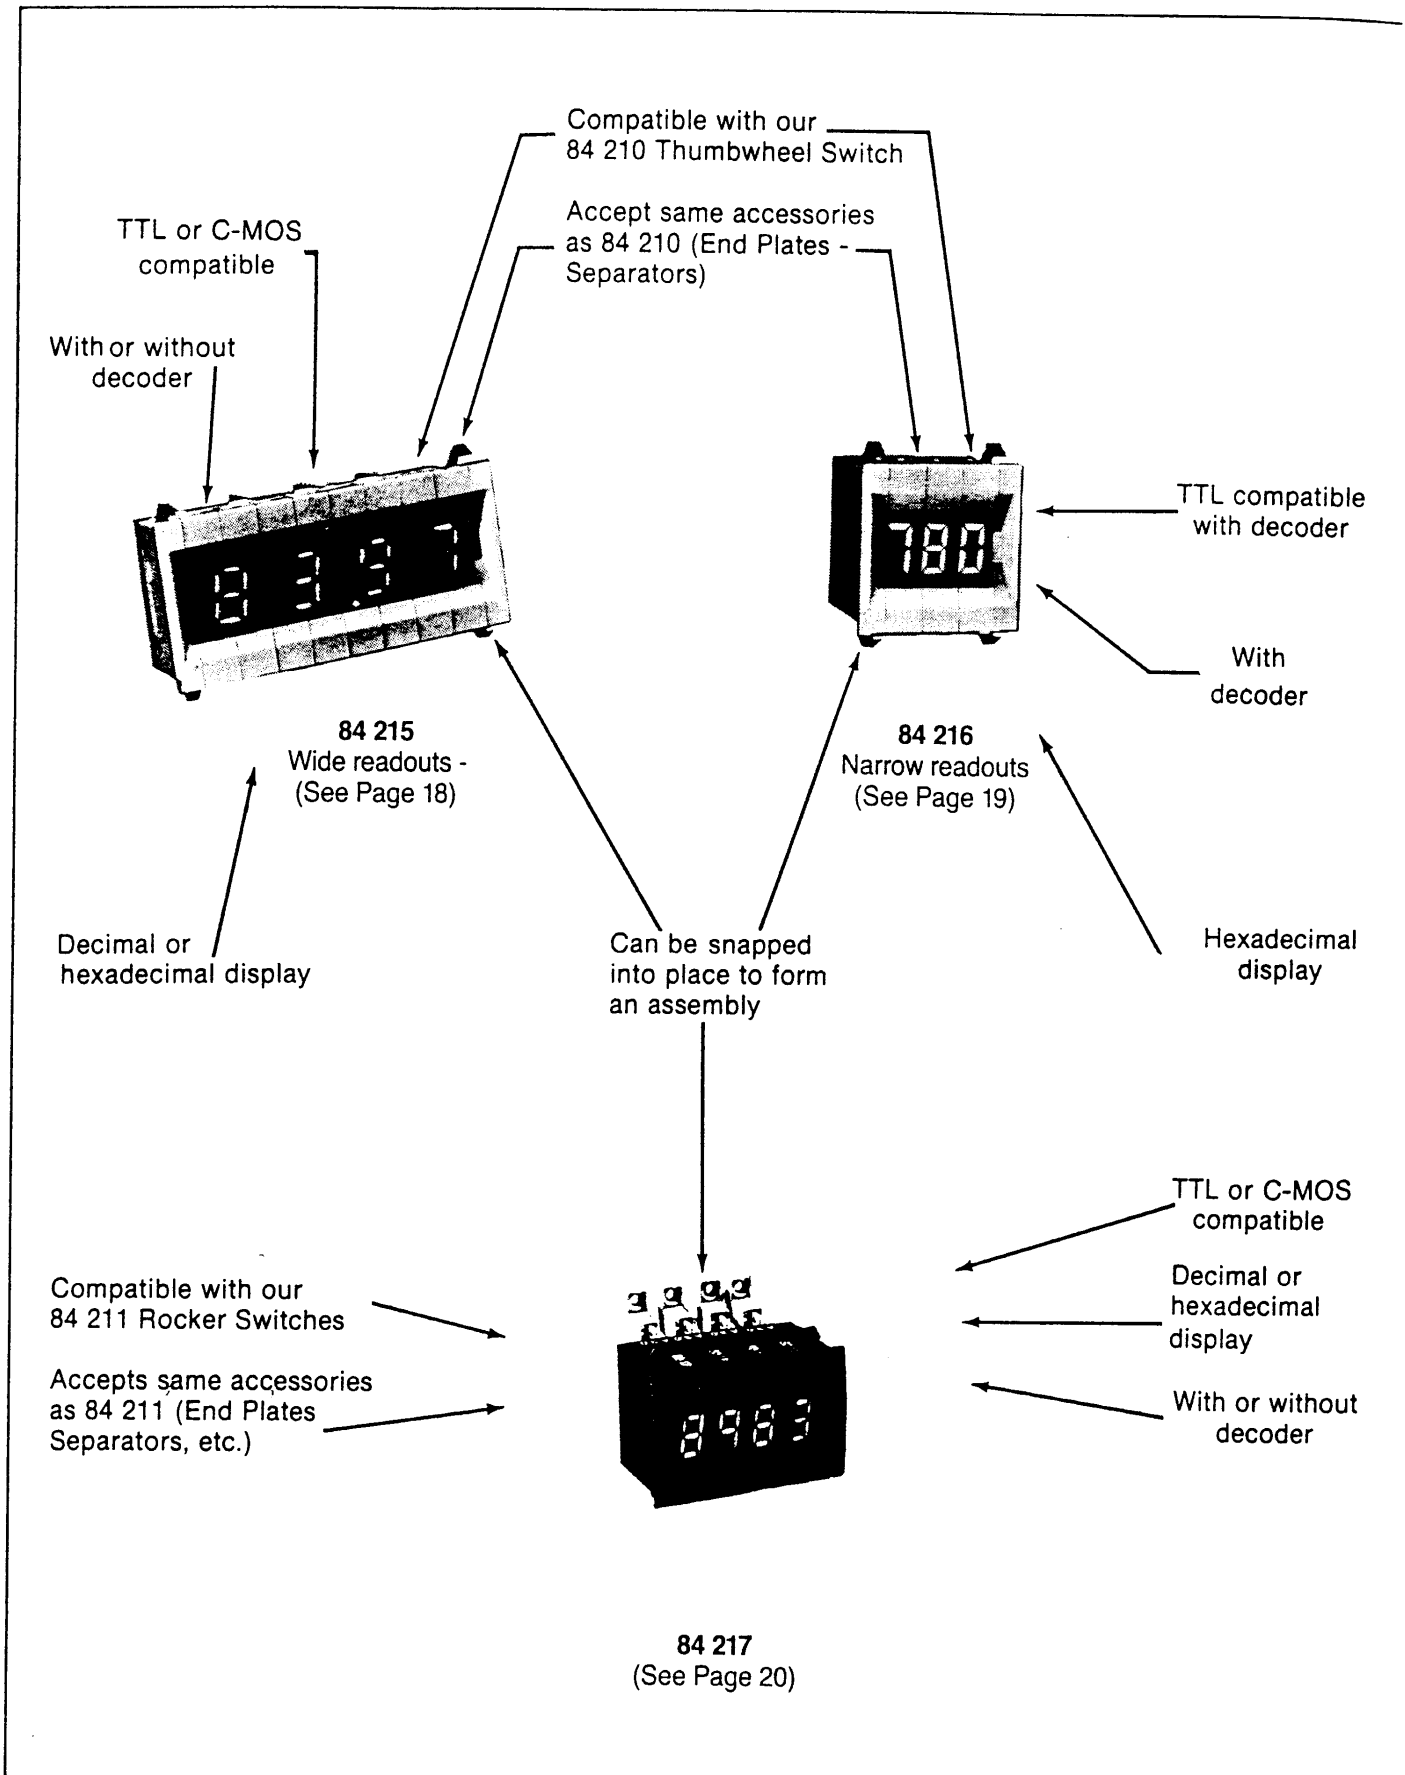

## L.E.D. Readouts - wide readout - panel mount Series 84 215

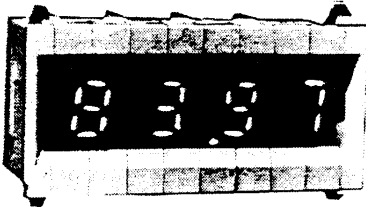

- The L.E.D. readout modules type 84 215 can work alongside our Thumbwheel switches, 84 210 Series.
- The same accessories (end plates, separators, etc.) can be used. This allows the assembly of counting and programming systems, offering a consistent design in a small size.
- As with our Thumbwheel switches, these modules can be snapped into place to form an assembly.
- Choice of decoders (TTL or C-MOS), memory, voltages.
- Three versions are available.

### Common Specifications

<b>Figure Height:</b> .433 in. (11 mm)	<b>Current Per Segment:</b> 7 mA
<b>Module Width:</b> .62 in. (16 mm)	<b>Display:</b> H.P. 5082 - 7653
<b>Color:</b> Red	<b>RBI - RBO output on all modules</b>
<b>Operating Temperature:</b> +32° F to +140° F. (0° C. to 60° C.)	(except A1)
<b>Case Color:</b> Black (standard) or grey (upon request)	<b>Common Cathode</b>

### Particular Specifications

Code	BCD Decoder		LT Output (Lamp Test)	EL Output (Memory)	Position of Decimal Point		Typical Consumption of Decoder at 75° F (25° C)	Voltages Available	Type of Display
	C-MOS	TTL			Left	Right			
A1	No	No	Yes	No		•	N.A.	5 V (standard) 12-15-24 V (on request)	According to User's decoder
A3	MM74 C48	No	Yes	No		•	0.05 $\mu$ A	5 V (standard) 12-15 V (on request)	Decimal
A6	No	9368	No	Yes		•	45 mA	5 V	Hexadecimal

### Terminations

### Dimensions in inches (mm)

**MODULES WITH DECODER A3 and A6**

DISPLAY

CIRCUIT DECODER

EL or LT ACCORDING TO THE DECODER (See wiring diagram)

**MODULES WITHOUT DECODER A1**

LONG BOARDS L = .73 (18.5)    TERMINAL 5 - COMMON

SHORT BOARDS L = .33 (8.5)

Wiring Diagram: See Page 17

Panel dimensions:  $(n \times .63) + (m \times .31) + .43\ddagger$  (inches),  $(n \times 16) + (m \times 8) + 11\ddagger$  (mm)

Height: 1.30 (33)

SHORT BOARD C = .31 (8)

LONG BOARD L = .73 (18.5)

Panel thickness: 06 TO 14 (1.5 TO 3.5) and 13 TO 24 (3.2 TO 6)

**PANEL CUTOUT**

Width:  $(n \times .63) + (m \times .31) + .31\ddagger$  (inches),  $(n \times 16) + (m \times 8) + 9\ddagger$  (mm)


Height: 1.22 (31)

Bottom dimensions: 51 (13) and 81 (20.5)


**Note:** n—Number of display modules  
m—Number of accessory modules such as spacer module

## L.E.D. Readouts - Wiring Diagrams


84 215 - A3

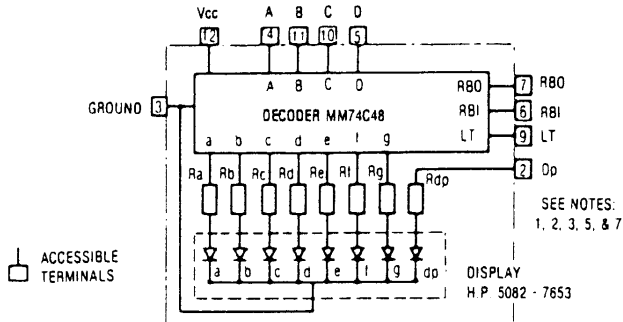


84 215 - A6

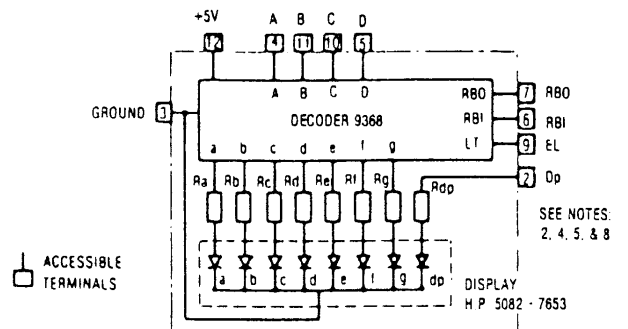


84 216

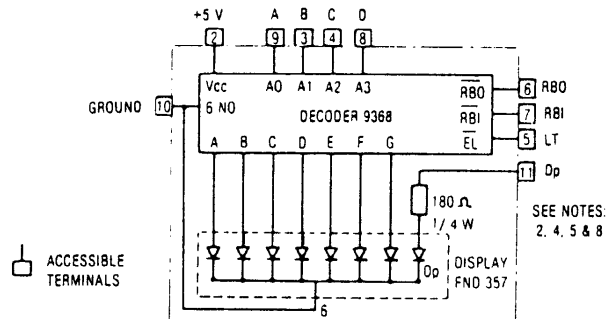


84 217 - A3

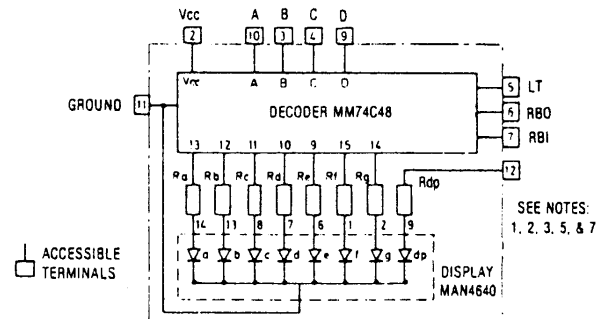


84 217 - A6

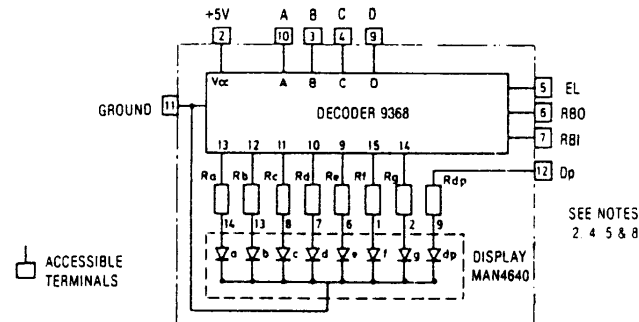

84 217 - A8

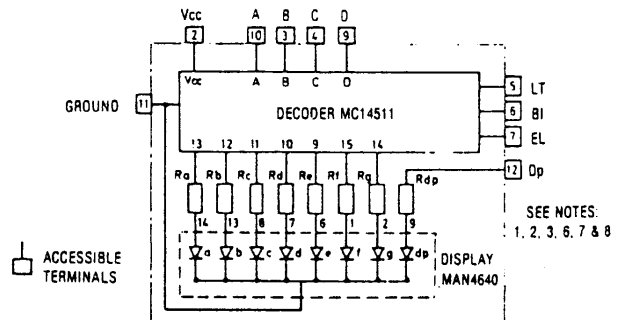

84 217 - A10

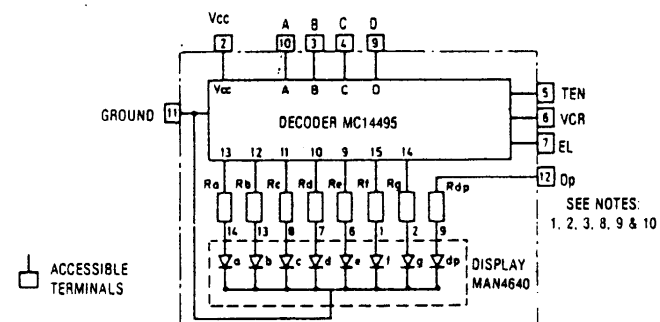

84 217 - A11

