


Model No.	POS.1	POS.2	POS.3
1MD1	ON	NONE	ON
Term. Comm.	2-3,5-6	OPEN	2-1,5-4

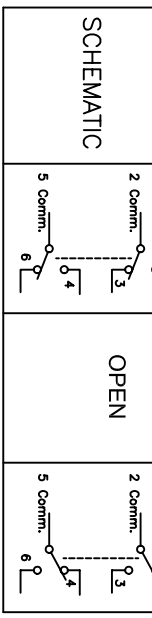

SWITCH FUNCTION

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
 Q : 2Amps @250VAC
 5Amps @120 VAC or 28 VDC

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO.,LTD.

SPECIFICATIONS
ELECTRICAL LIFE: 40,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 10m Ω max. initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000M Ω min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30° C to 85° C.

MATERIALS
CASE: Dially phthalate (DAP) (UL94v-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Silver or gold plated.
SWITCH SUPPORT : Brass , Tin plated.

PANEL MOUNTING

SOLDER LUG

符號	原尺寸	修改後尺寸	變更日期
1 (A)			
2 (B)			
3 (C)			
4 (D)			
5 (E)			

SCALE (比例) :	3 : 2
TOLERANCE (公差) :	0.00 mm ± 0.25mm
ANGULAR :	± 0.40mm
FILE NAME :	1MDP0061

TITLE	Miniature Toggle Switches				SIZE
DWG NO.	1MD1T6B11M1QE				A4
REV.	A	DATA	APR - 03 - 2002	SHEET	1 of 1
CHECKED BY	Jack	DRAWN BY	BOBO	張數	