



This is a sample photo.


Order symbol	PC 150/125 HG		
EI. number	EAN-code	6418074022202	
Sweden			
Denmark			
Finland	3420357		

Including
Enclosure cover with cover screws, body with mounting screws and gasket.

Product Properties
USA: UL Type 1, 4, 4X, 6

EURO: IP 66/67 (EN 60529); IK 08 (EN 50102)

MNX PC

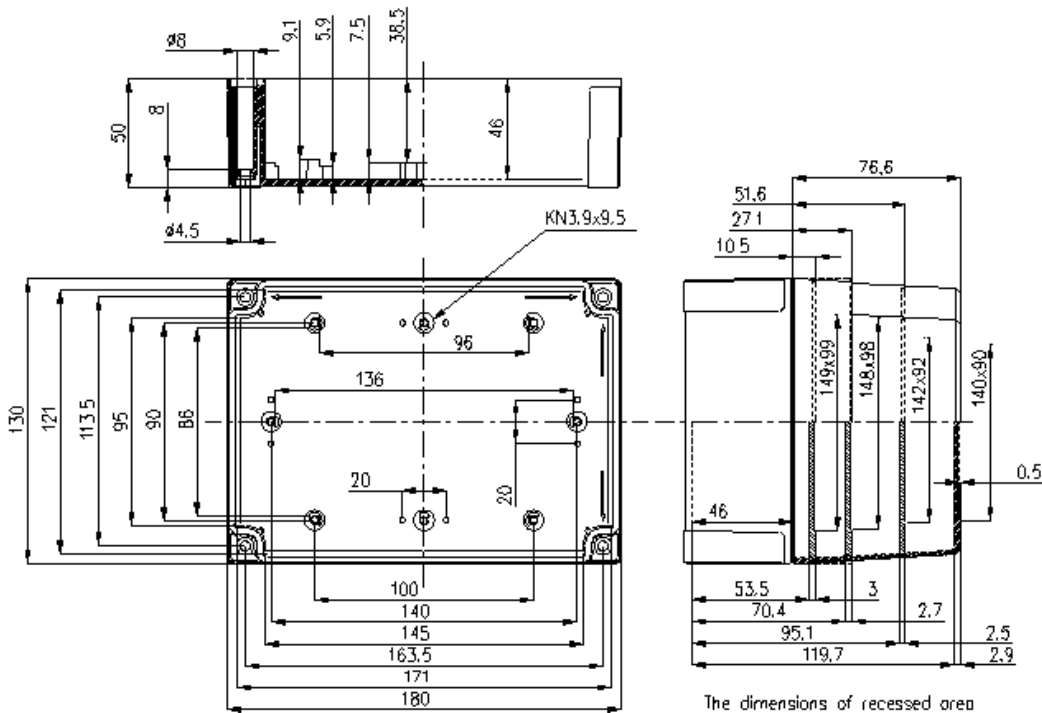

The dimensions of recessed area on top of cover have been given above (e.g. 149x99). The area have radius 2.0 mm in the corners.

Technical Information of Product Group

Standard colour:	RAL 7035	Temp. range-in cont. use:	Max. +80 °C
Flame resistance:	UL94-5V (UL 746 C 5)	Temp. range-of material:	- 40 °C - + 120 °C

Accessories

Sealing bushing	DP 14553
Condensation water plug	MB 12189
Mounting screw	KN 3.9x9.5
Ventilation device	MB 10631
Inspection window	L 08
Cover screw	SS 14551H
Mounting plate	MIV 150
Swing door kit	HFP 180
DIN-Rail	MIV 10
DIN-Rail	MIV 15
DIN-Rail	MIN 10
DIN-Rail	MIN 15
Front plate	FP A 150/180
Hinge	TH A