
ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS				DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
948	A	RELEASED	HYD	6/23/00	JC	10/4/00	סוכ	10/8/00	

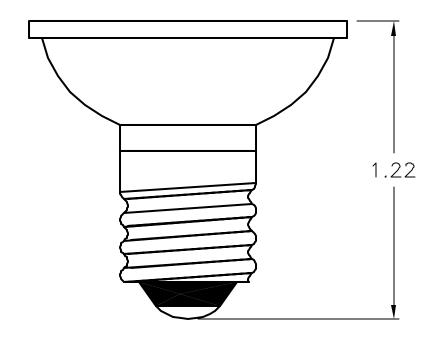

SPECIFICATIONS:

1. Volts: 120

2. AMPS: 0.025

3. Watts: 3

4. EFC: 1000

5. Filament: CC-7A

6. Life: 7500 Hours.

SPC-FOD4.DWG

JISCLAMEN AL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE NTENDED USE AND ASSUME ALL RISK AND LIABILITY MHATSOEVER IN CONNECTION THEREMITH.				SPC TECHNOLOGY					
UNLESS OTHERWISE	DRAWN BY:	DATE:	DRAWING TITLE:						
SPECIFIED,	H2IDO MAH2IH	6/23/00	T-2 CANDLEABRA SCREW BASE LAMP						
DIMENSIONS ARE	CHECKED BY:	DATE:	SIZE	DWG. NO.		ELEC	TRONIC FILE	REV	
PURPOSES ONLY.	JOHN COLE	10/4/00	Α	12	ORC	1€	N7514.DWG	Α	
	APPROVED BY:	DATE:							
	DANIEL CAREY	10/6/00	SCAL	E: NTS	U.O.M.: INCHES		SHEET: 1 OF		