

REV.	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD

ORDERING INFORMATION

BE 068 P - 3 0 0 0 0 0  
 (1) (2) (3) (4) (5) (6) (7) (8)

1. SERIES NUMBER :

BE : HIGH DENSITY 1.27(.050") SPACING MINI CONNECTOR  
 FLAT CABLE I.D.C TYPE 0.635(.025")  
 (FOR 30 AWG WIRE OR WIRE DIAMETER  
 0.45 - 0.60 mm )

2. NO OF CONTACTS :

EX 068 : 68 POSITIONS

3. CONTACT TYPE :

P : PLUG S : SOCKET

4. COLOR (INSULATOR)

3 : BLACK

5. CONTACT FINISH :

- 0 : SELECTIVE GOLD FLASH OVER 30 μm NICKEL
- 2 : 15μm SELECTIVE GOLD OVER 50 μm NICKEL
- 3 : 30μm SELECTIVE GOLD OVER 50 μm NICKEL

6. METAL SHELL FINISH :


- 0 : ALL PLASTIC
- 1 : TIN PLATED SHELL, WITH GROUNDING INDENTS
- 4 : TIN PLATED SHELL, W/O GROUNDING INDENTS
- 5 : NICKEL PLATED SHELL, W/O GROUNDING INDENTS
- 6 : NICKEL PLATED SHELL, WITH GROUNDING INDENTS

7. SCREW TYPE :

- 0 : NONE, 1 : 4-40 UNC, 2 : 2-56 UNC, 3 : M2.6\*0.45

8. BLACKET TYPE

- D : NONE
- 1 : WITHOUT RAILS, WITH LATCH BLOCKS
- 2 : WITH RAILS & LATCH BLOCKS
- 3 : WITHOUT RAILS & LATCH BLOCKS

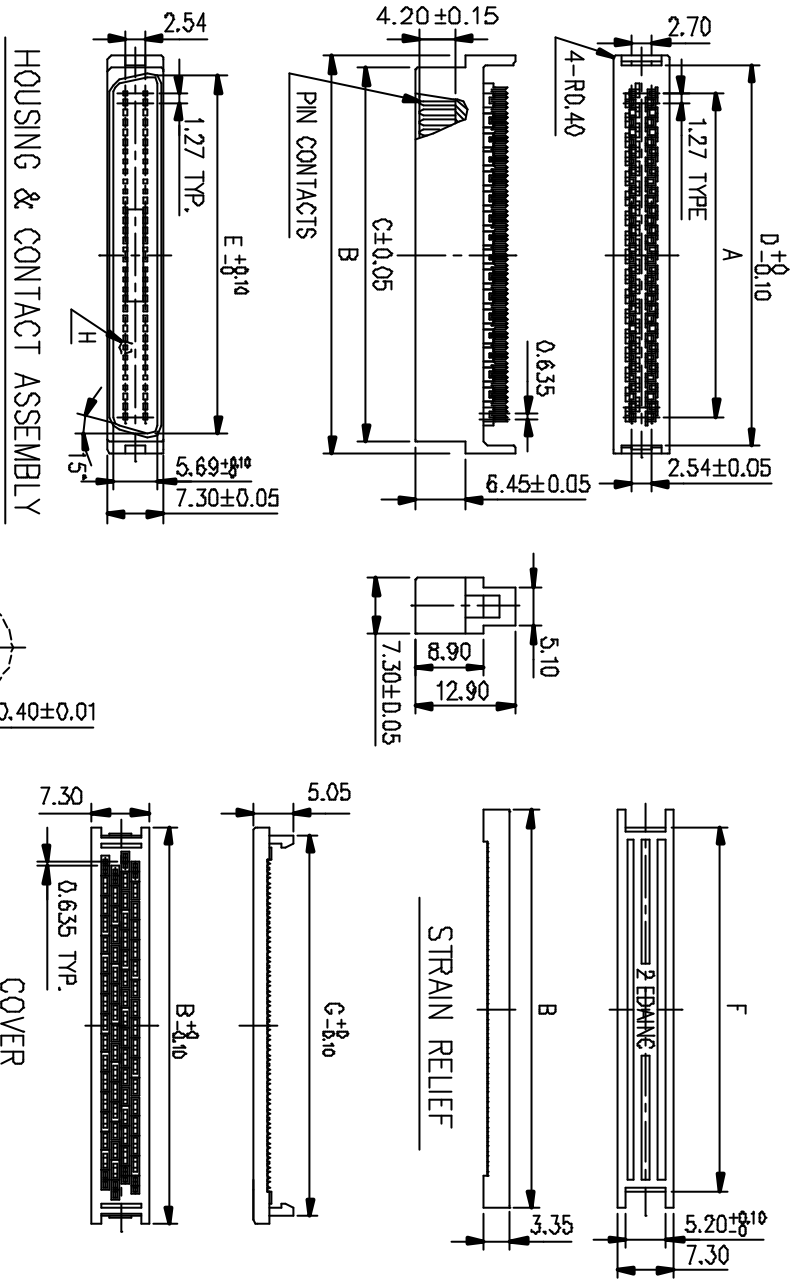

HOUSING & CONTACT ASSEMBLY

COVER

STRAIN RELIEF

H DETAIL : 10 / 1

SPECIFICATION -

- INSULATOR MATERIAL : PBT WITH GLASS-FIBER REINFORCED
- CONTACT MATERIAL : PHOSPHOR BRONZE , GOLD OVER NICKEL
- CONTACT CURRENT : 1A
- INSULATION RESISTANCE : 500MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE : 35mΩ MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : AC 250V FOR 1 MINUTE.
- OPERATING TEMPERATURE : -55°C - +105°C.

BE068P\_\*\*\*\*\*

PART NO.

MATERIAL	TOLERANCE UNSPECIFIED	EDA INC.		UNIT
	± 0.00	SCALE	1.4 : 1	MM
FINISH	± 0.25	NAME	BE SERIES 68PIN SCSI-III H.D. UNSHIELDED PLUG ASSEMBLY (IDC TYPE 0.635(.025"))	
	± 0	DESIGNED	PERRY	
	ANGLE ± 1°	CHECKED	JOHN	
	DRAWN	APPROVED	JOHN	
		DRAWING NO	R-S108E-0	
			REV. 9	