

Miniature Slide Switches

Specifications:


Contact rating:	125 V AC, 100 mA / 60 V DC, 100 mA
Contact resistance:	< 10 mΩ
Insulation resistance:	> 1000 MΩ, at 500 V DC
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 30 000 operations
Operating temperature:	- 45° to + 85° C
Contacts/Terminals:	PC terminals, copper alloy with 2 μ gold-plating over 3 μ nickel barrier
Material:	case: diallyl-phthalate, cover and slide: Noryl SE 0
Mounting:	on pc-board
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C hand-soldering – max.: 20 W, 5 sec, 270° C

Models: Switching functions

SPDT

MSS 101 DB


on - on

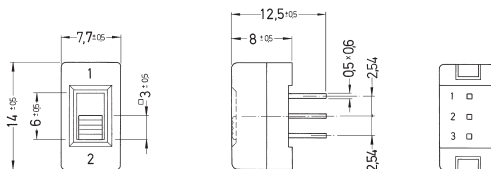

SPDT

MSS 111 DB

on - on

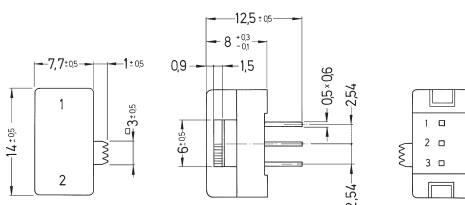

DPDT

MSS 201 NB

on - on

