





unimec 16300/16700/16800




Technical Data:

- 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:
low temp: -40/+75°C
high temp: -40/+160°C
- through-hole only


Dimensions 16300:

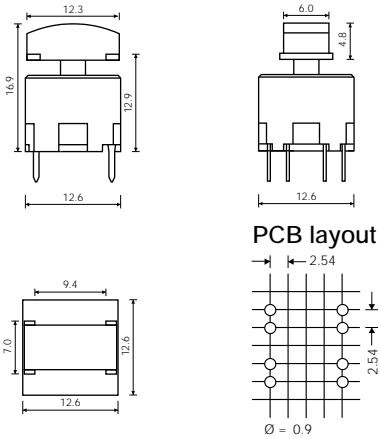

Dimensions 16700:

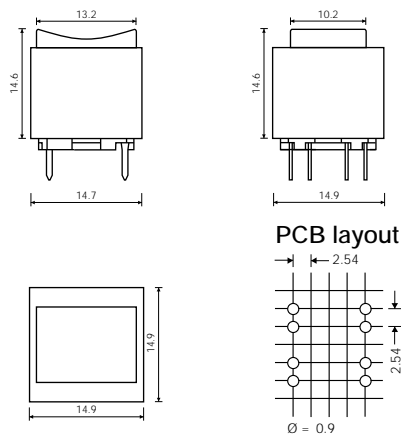

Dimensions 16800:

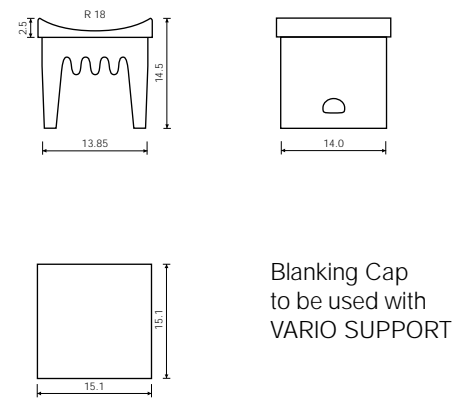

HOW TO ORDER

- 1 5 + 1 6 3 0 0
- Switch**
- 15501 mom. silver
 - 15551 alt. silver
 - 15502 mom. gold
 - 15552 alt. gold
 - 15500 silent silver
 - 15401 mom. silver high temp.
 - 15451 alt. silver high temp.

- Cap**
- 00 blue
 - 01 brown
 - 02 green
 - 03 grey
 - 04 yellow
 - 05 golden
 - 06 white
 - 07 orange
 - 08 red
 - 09 black

- 1 5 + 1 6 7 0 0
- Switch**
-

- Cap**
- 00 blue
 - 02 green
 - 03 grey
 - 04 yellow
 - 06 white
 - 08 red
 - 09 black

- 1 6 8 0 0

- Blanking Cap**
- 00 blue
 - 01 brown
 - 02 green
 - 03 grey
 - 04 yellow
 - 05 golden
 - 06 white
 - 07 orange
 - 08 red
 - 09 black
 - 11 transparent
 - 12 transparent green
 - 14 transparent yellow
 - 18 transparent red

Ordering example: 15551 + 1670009