

PCB Layout, component side (thickness 1.6 mm min.)


Max. Temperature : 260° during 10 seconds

D	09551663813.741	1	4-40 UNC	Black Insulator	Reel Packaging (120 connectors) see page 2/2							D-SUB SMT Standard Male 9p with die casted grounds and screwlocks	Maßstab/ Scale  1,5:1	
	09551666813.741	2												
	09551667813.741	3												
	09551663833.741	1	M3											
	09551666833.741	2												
	09551667833.741	3												
Part number	PL	Thread	Index designation	Mod.	Dot.	Name	Mod.	Dot.	Name	Sub.				

HARTING EURL  
F-95972 Paris



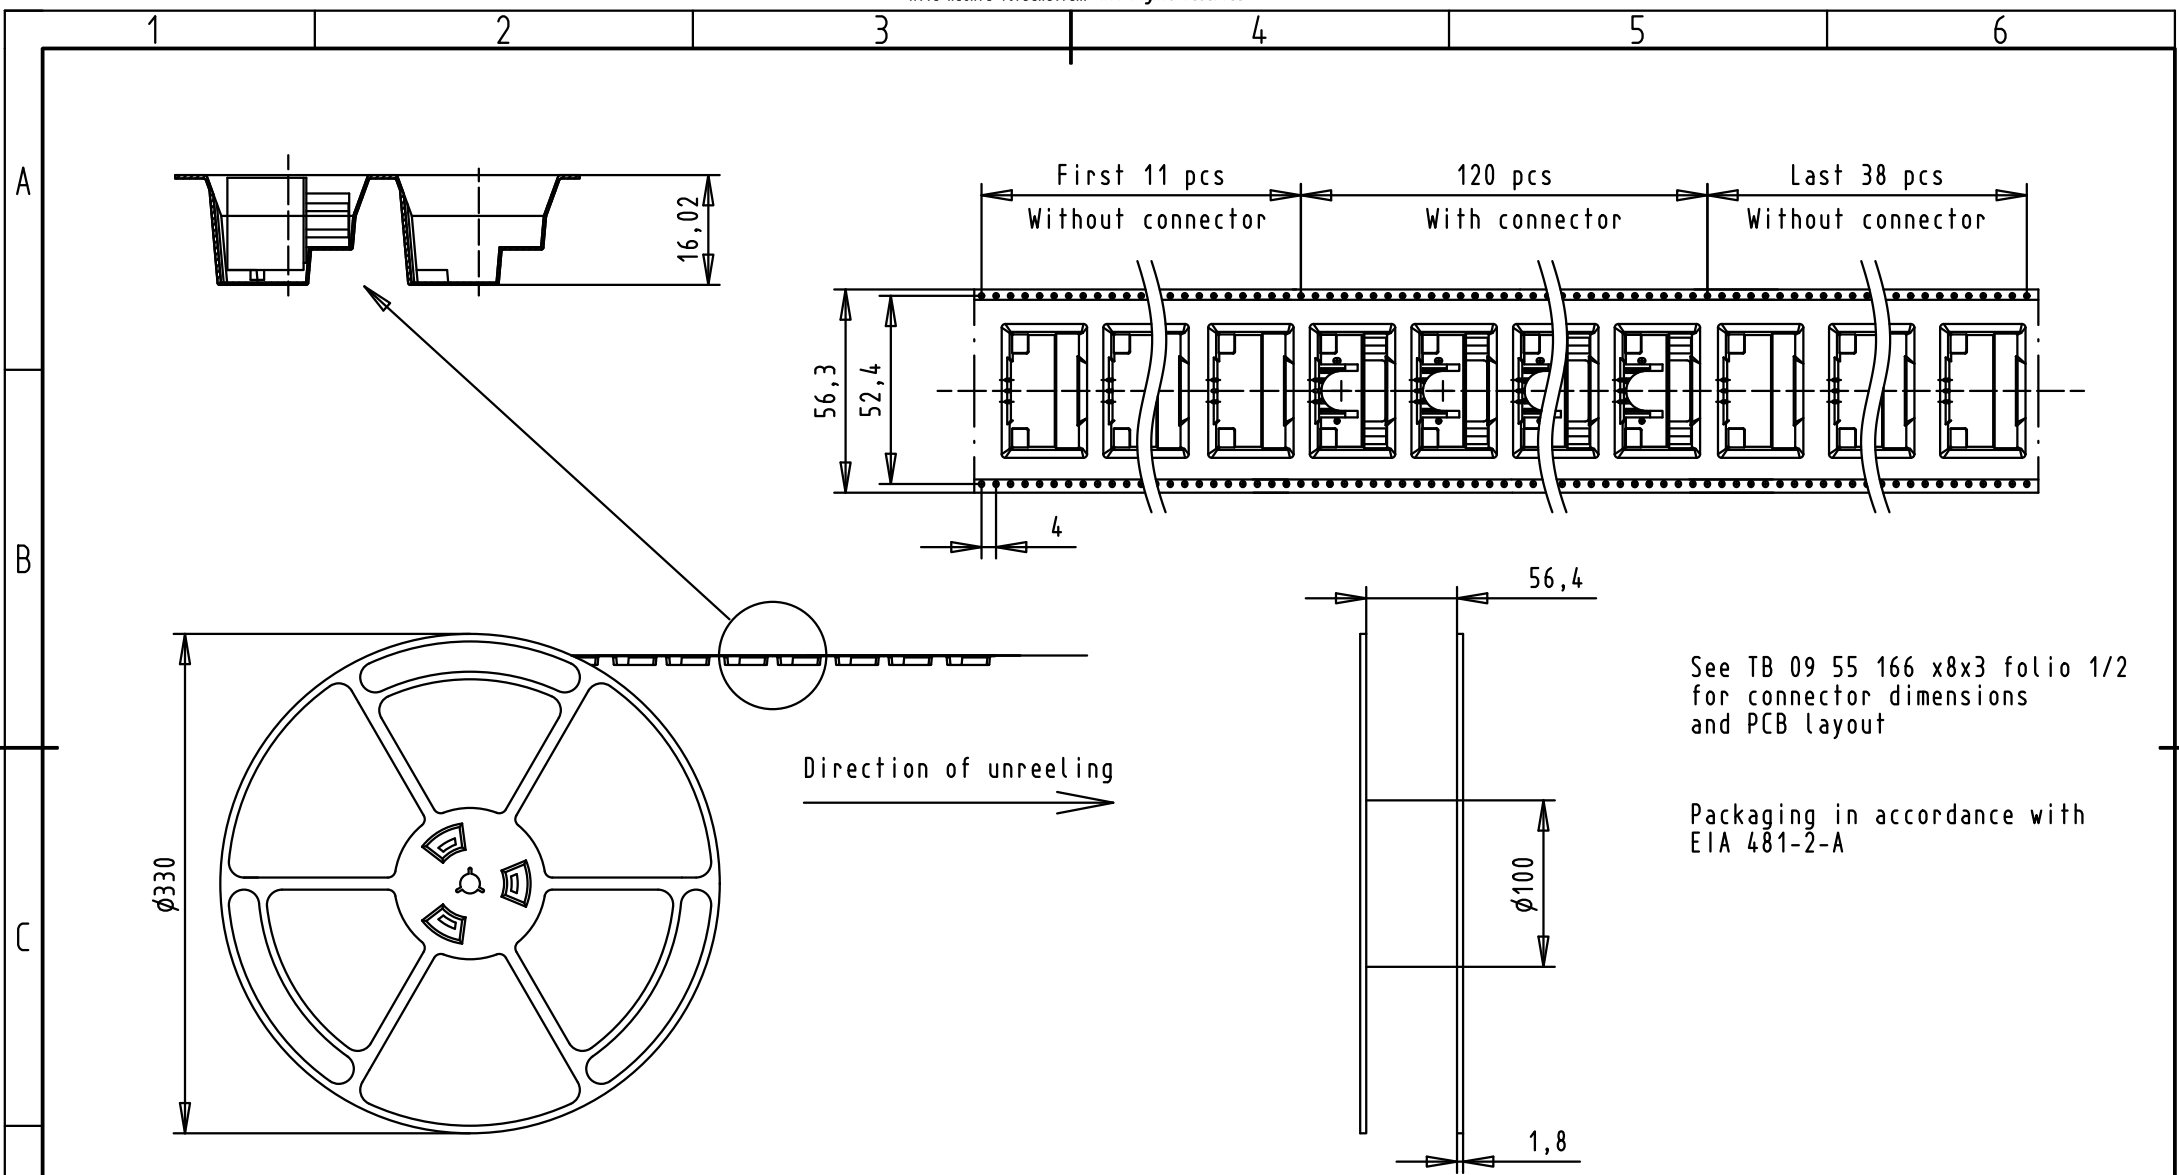


TB 09 55 166 x8x3



See TB 09 55 166 x8x3 folio 1/2  
for connector dimensions  
and PCB layout

Packaging in accordance with  
EIA 481-2-A

Part number		PL	Thread	Index designation	Mod.	Dot.	Name	Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Standard Male 9p with die casted grounds and screwlocks	Maßstab/ Scale					
09551663813.741	1	4-40 UNC	M3	Black Insulator	33975	02Apr2007	ED	Detail.	17Jul2006			ED	 HARTING EURL F-95972 Paris	TB 09 55 166 x8x3 Sub.	Blatt/ Page 2 / 2		
09551666813.741	2											Insp.					
09551667813.741	3											Stand.					
09551663833.741	1	M3	M3	Reel Packaging (120 connectors)	33929	25Jan2007	ED	HARTING EURL		 HARTING	TB 09 55 166 x8x3 Sub.	Blatt/ Page 2 / 2					
09551666833.741	2														F-95972 Paris		
09551667833.741	3																