



REVISONS		DDC. NO. SPC-FD05, Total Pages: 2
DGP #	REV	Effective: 7/15/97, DGP No: 229 Supervisor DGP No: 103
522	A	RELEASED
		J.W.M. 11/12/98 J.C. 12/1/98 D.J.G. 12/4/98

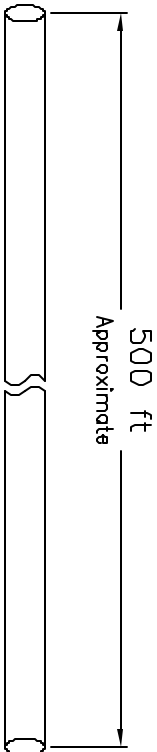

SPECIFICATION:

LAN Cable, Category 5 Unshielded Twisted Pair (UTP), UL(E151955), CSA(LL79189), TIA/EIA 568A Patch Cord.

Material:

1. Conductor: 24AWG (7 x AWG32) Stranded Copper
2. Insulation: Polyolefin
 Max. Avg. Thickness: 0.228 mm
 Min. Avg. Thickness: 0.178 mm
 Min. Thickness: 0.153 mm
3. Color code: Pair 1: Blue & White/Blue
 Pair 2: Orange & White/Orange
 Pair 3: Green & White/Green
 Pair 4: Brown & White/Brown
4. Jacket: 75°C PVC
 Jacket Color: Black
 Min. Avg. Thickness: 0.585 mm
 Min. Thickness: 0.458 mm
 Approximate O.D.: 5.5 mm (Patch Cord)

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SPC TECHNOLOGY DOES NOT WARRANT ANY OF OUR PRODUCTS OR SERVICES FOR ANY PARTICULAR USE OR APPLICATION. THE USER SHALL OBTAIN THE SERVICES OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



DRAWN BY: Jeff Mcvicker		DATE: 11/12/98	DRAWING TITLE: CAT-5 Cable (UTP)	
CHECKED BY: JOHN COLE		DATE: 12/1/98	SIZE: A	DWG. NO.: 3468
APPROVED BY: Daniel Carey		DATE: 12/4/98	SCALE: NTS	U.O.M.: Millimeters
Dimensions are shown for reference only.			ELECTRONIC FILE: 92N5986.dwg	REV: A