



UL 508C  
pending

### Features

- ◆ Ultra-wide input voltage range
- ◆ Output voltage adjustable
- ◆ Overload and short circuit protection
- ◆ Low ripple and noise
- ◆ I/O-isolation 1500 VDC
- ◆ Compact, slim plastic case
- ◆ Reliable snap-on mount on DIN-rail
- ◆ Bracket for wall mount included
- ◆ 3-year product warranty



In the TCL range of DIN-rail power supplies are 4 models for DC input voltage available. The wide input ranges of 9.5–18 VDC resp. 18–75 VDC means these models can be operated from all popular DC supply voltage systems.

With tightly regulated output voltage these DC/DC converters provide a reliable power source for sensitive loads in industrial process controls, factory automation and other equipment exposed to a critical industrial environment. A further application for these converters is to isolate a specific load from the 24 V bus voltage. A further application for these converters is to isolate a specific load from the 24V bus voltage. Easy installation is provided with snap-on mounting on DIN-rails and detachable screw terminal block.

### Models

Order Code	Input Voltage Range	Output Voltage	Output Current max.
TCL 012-124 DC	9.5 – 18.0 VDC	24 VDC	1.0 A
TCL 024-105 DC	18 – 75 VDC	5 VDC	5.0 A
TCL 024-112 DC		12 VDC	2.0 A
TCL 024-124 DC		24 VDC	1.0 A

### Input Specifications

Input power at no load		1.0 Watt max.
Start-up voltage/under voltage shut down	TCL 012 model: TCL 024 models:	8.4 VDC/7.6 VDC 17.2 VDC/15.7 VDC
Reverse polarity protection		by internal fuse
Surge immunity		EN 61000-4-5, Level 3
Burst immunity		EN 61000-4-4, Level 4
Conducted noise (input)		EN 55011 class B, EN 55022 class B
Efficiency		86% typ.

### Output Specifications



Output voltage adj. range	5 VDC model: 12 VDC model: 24 VDC models:	5.0–5.25 VDC 12.0–15.0 VDC 24.0–28.0 VDC
Regulation	– Input variation $V_{in \min.}$ to $V_{in \max.}$ – Load variation 0...100%	0.5 % max 0.5 % max
Ripple and noise (20 MHz bandwidth)		<50 mV pk-pk
Electronic short circuit protection		current limitation at 110 % typ. (constant current, automatic recovery)
Overvoltage protection, trigger point	5 VDC model: 12 VDC model: 24 VDC models:	<6.5 V <24 V <42 V

### General Specifications


Temperature ranges	– Operating – Storage (non operating)	–10 °C...+70 °C max. – 25 °C...+85 °C
Temperature derating		1.5 %/K above 50°C
Humidity (non condensing)		95 % rel. H max.
Temperature coefficient		0.02 %/K
Switching frequency		55 – 180 kHz depending on load (frequency modulation)
Isolation voltage (1 min.)	– Input/Output	1500 VDC
Reliability, calculated MTBF @ 25 °C (according to IEC-1709)		>2.5 Mio h
Safety standards		IEC 60950-1, EN 60950-1 (output SELV), UL/cUL 60950-1, EN 60204
Safety approvals	– UL approval – CB report	UL 508 (pending) for IEC/EN 60950-1
Electromagnetic compatibility (EMC), Emissions		EN 61000-6-3
Electromagnetic compatibility (EMC), Immunity		EN 61000-6-2
Safety class		degree of protection class 1
Case protection		IP 20 (IEC 60529)
Enclosure material		plastic FR2010-110C (UL 94V-0 rated)
Mounting		DIN-rails as per EN 50022-35x15/7.5 (snap-on with self-locking spring) bracket for wall/chassis mount included

All specifications valid at nominal input voltage, full load and +25 °C after warm-up time unless otherwise stated.

**Case Dimensions**

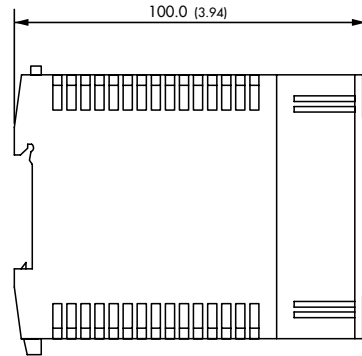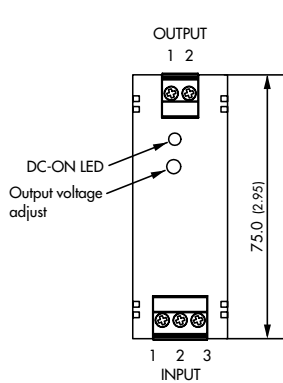

Output	Input
1 + Vout	1 Protective earth
2 - Vout	2 -Vin
	3 +Vin

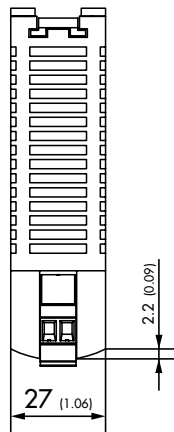


**Weight:** 140g (4.9 oz)

Dimensions in [mm], ( ) = Inch  
Tolerances: ±0.5 (0.02)

**Wall Mounting Bracket**

Instead on a DIN-rail, the modules can be also mounted on a chassis or wall with help of a mounting bracket which is supplied as standard with each Converter

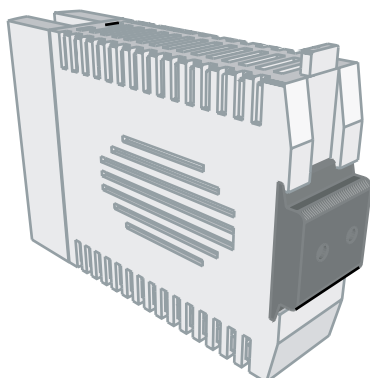

Specifications can be changed any time without notice.