

VERONEX

465-884/938

465 902*

VERONEX IP64

- IP64 protection against water and dust
- Available in 4 plan sizes and 9 heights
- Vertical and horizontal mounting guides
- All sizes ex-stock
- Full range of support accessories

The VERONEX IP64 boasts the full range of features detailed on pages 5.27 & 5.28. This enclosure is a simple two part construction with plastic end panels which are readily force fitted between two ribs in the case moulding. This, together with the tongue-and-groove joint which connects the two covers, achieves the IP64 seal against the ingress of dust and water.

VERONEX IP64 is available in 4 plan sizes and 9 different heights.

Size 1 units are especially suitable, using the belt clip accessory, for applications demanding small portable electronic housings.



Size 4 is supplied with four self-adhesive non-slip feet for fixing to the base in tabletop applications.

MATERIAL SPECIFICATION

- Material : High impact polystyrene
- Temp range : -40 +80 °C
- Flame class rating : UL94-V0
- Colour : Covers Pale Grey RAL 7035
Panels Dusty Grey RAL 7037

CONTENTS OF KIT

- 1 Base moulding
- 1 Top moulding
- 2 Moulded end panels
- 4 Case fixing screws
- 4 Self adhesive feet (size 4)
- 4 Self-tapping pcb screws

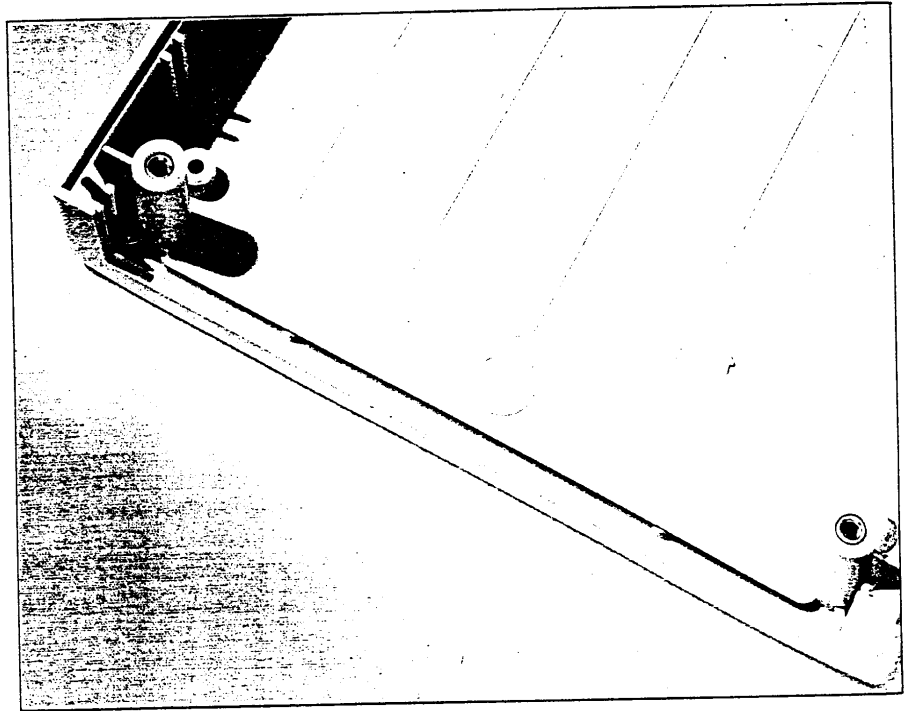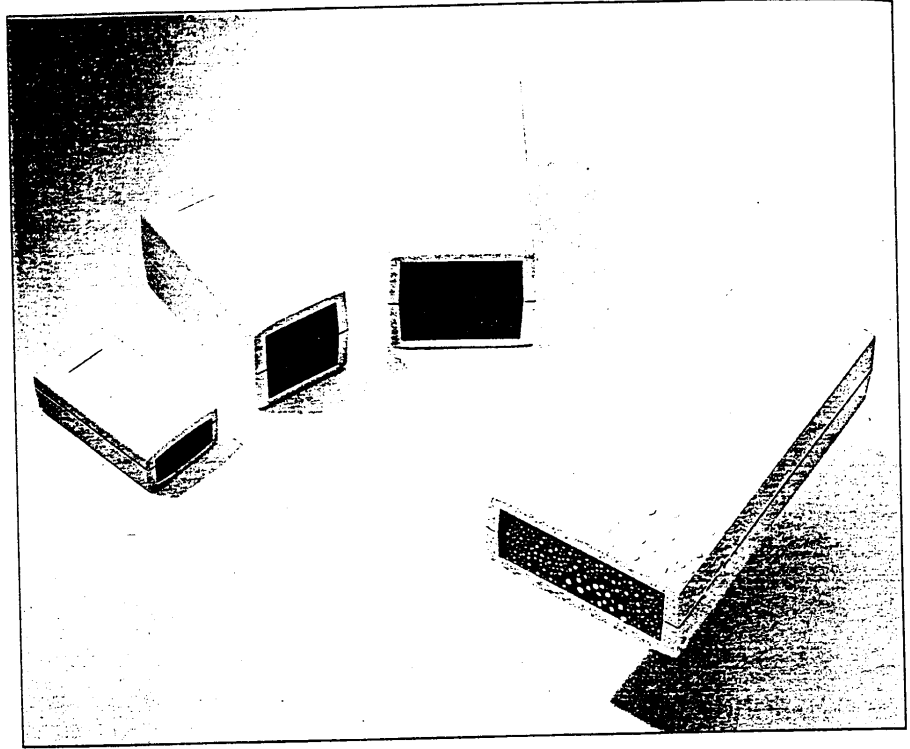





Small Enclosures 5

VERONEX IP64

Ordering information

Size	Dimensions			Order code
	H	W	D	
1	90	50	16	75-227894A
1	90	50	24	75-227895J
1	90	50	32	75-227896F
2	120	60	30	75-227897C
2	120	60	40	75-227898L
2	120	60	50	75-227899H
3	150	80	30	75-227900L
3	150	80	45	75-227901H
3	150	80	60	75-227902E
4	190	100	40	75-227903B
4	190	100	60	75-227904K

- 6** = LIMITATION OF INGRESS OF DUST
- 4** = PROTECTION AGAINST SPLASH WATER

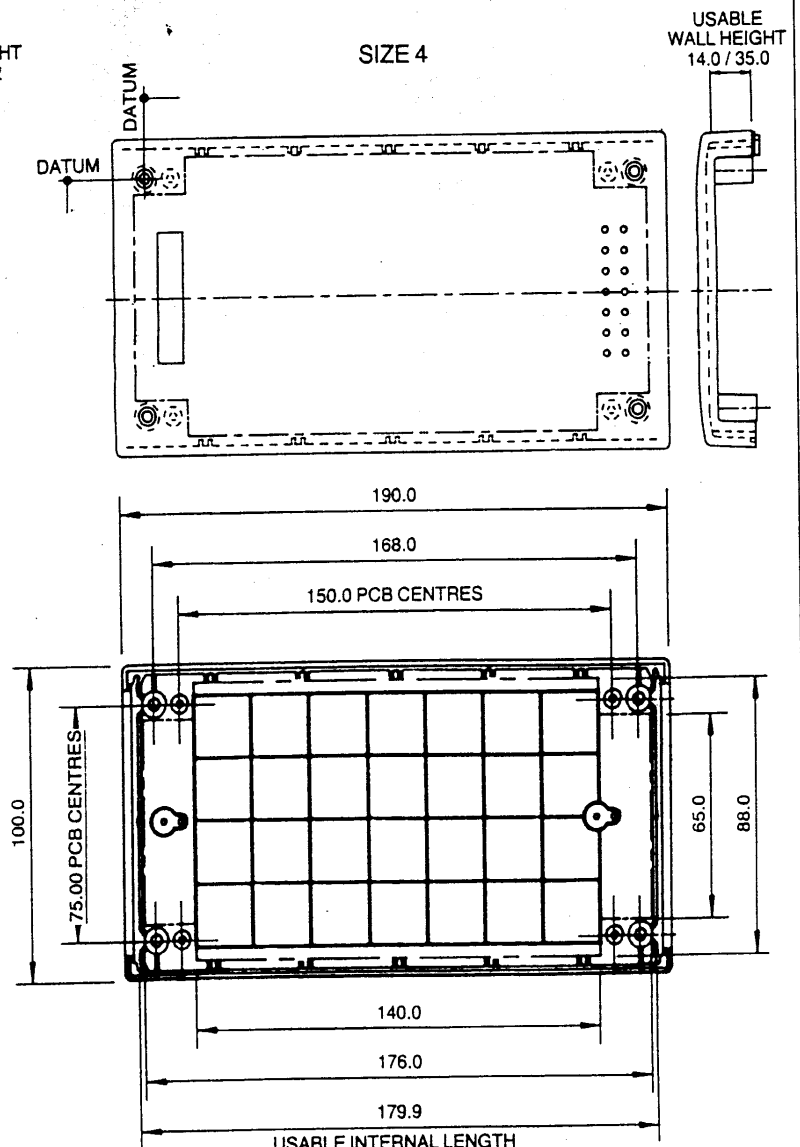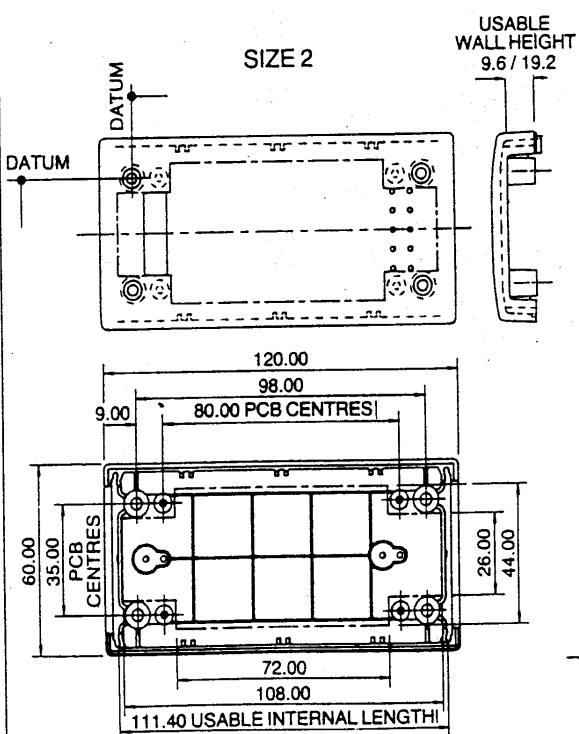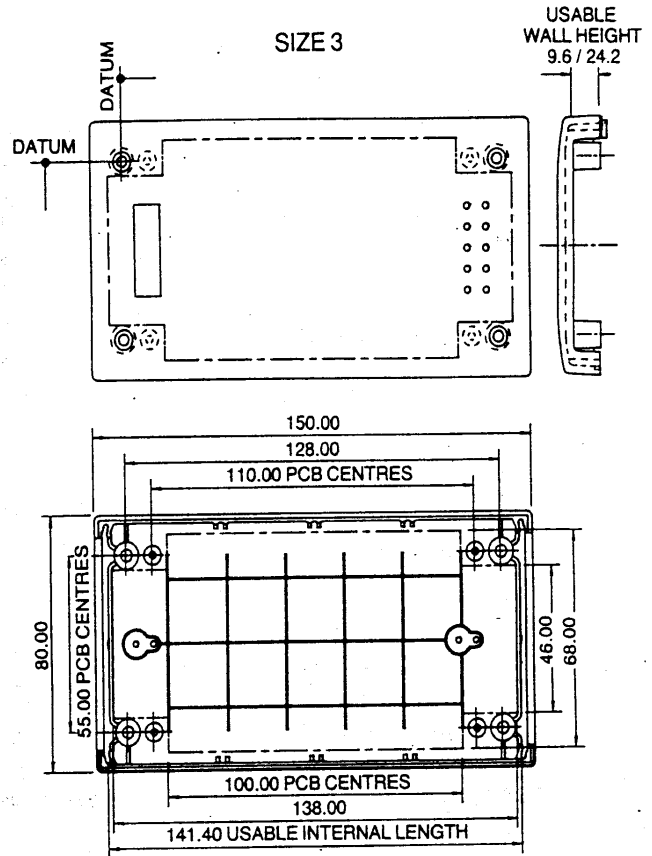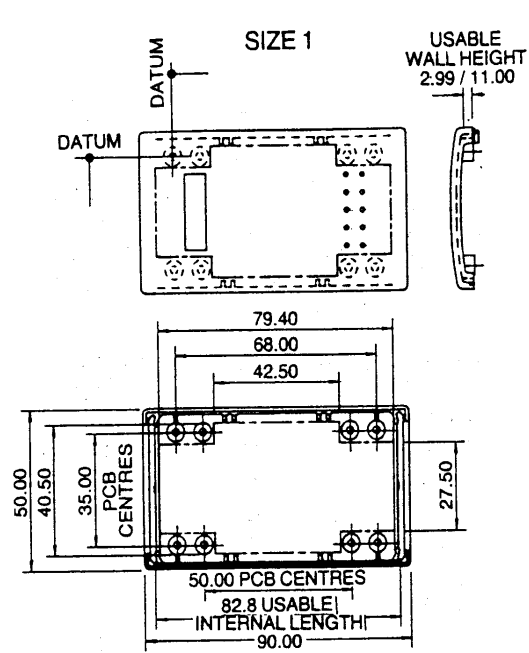

THIRD ANGLE PROJECTION

