


Panel Mounted for 5mm × 20mm Fuses

HTC-30M


Ratings: 250V, 6.3A, 2.5W
Screwdriver slot

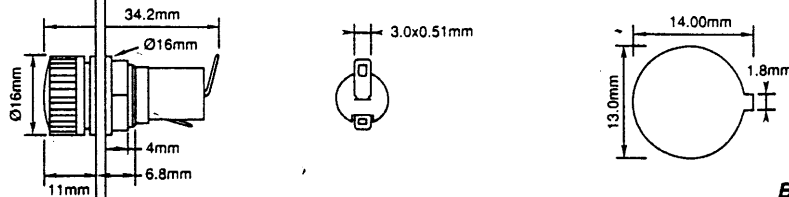

BIF document: 2110

HTC-35M

Ratings: 250V, 6.3A, 2.5W
Threaded cap

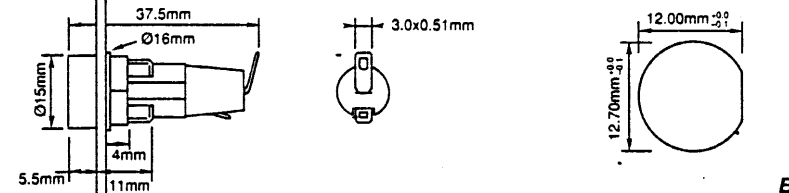


BIF document: 2110

HTC-40M

Ratings: 250V, 6.3A, 2.5W
Screwdriver slot


899-276

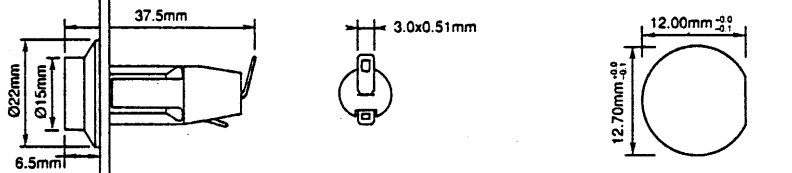

BIF document: 2110

HTC-55M


Ratings: 250V, 6.3A, 2.5W
Fuse carrier: bayonet type

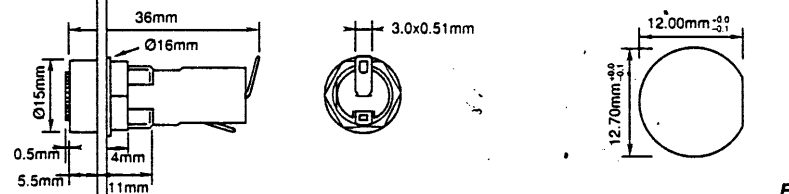

BIF document: 2110

HTC-70M

Ratings: 250V, 10A, 2.5W
Fuse carrier: bayonet type

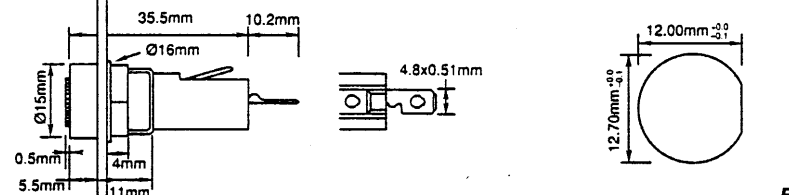

BIF document: 2110

Specifications

- Terminals:** Brass, tin-plated.
- Molded Materials:** High temperature thermoplastic that meets the flammability ratings of UL 94-V0; Glow Wire Test: 960°C per IEC 695-2-1.
- Solderability:** In accordance with IEC 68-2-20.
- Agency Approvals:** UL Recognized — Guide IZLT2, File E14853; CSA Certified — Class 6225-01, File 47235; SEMKO — 9226031 (HTC-30M, HTC-35M); 9226032 (HTC-40M); 9226033 (HTC-55M); 9226034 (HTC-70M)
- Electrical:** Contact Resistance: ≤ 10mΩ; Insulation Resistance: ≥ 10mΩ; Dielectric Strength ≥ 2000 VAC.
- Shock Safety:** PC2 (fuseholders).
- Packaging:** Standard Qty 10 (No Prefix), Bulk Qty 100 (Prefix Catalog Number with BK).

