

Part Number: SMT-4203D




Features

- SMD Mounting
- Compatible with convection, IR and Vapor Phase
- High sound output

Electrical Specifications

Rated Voltage	3.6 Vp-p
Operating Voltage	2.0 - 5.0 Vp-p
Resonant Frequency	2700 Hz
Sound Pressure Level @ 10 cm (Min.)	85 dBA
Rated Current (Max.)	120 mA

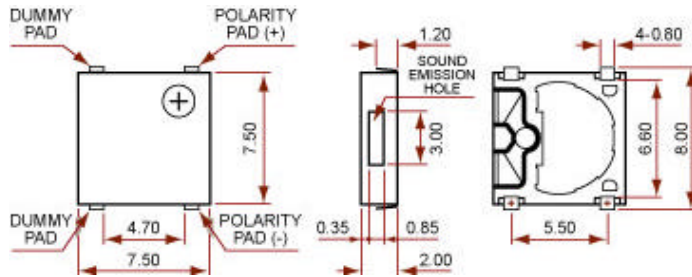

Performance



For application notes and detail drawing specifications, please consult www.projectsunlimited.com.

Specifications subject to change without notice.

© 2004, Projects Unlimited Inc., All Rights Reserved.