

# AZ9731

## 40 AMP MINI-ISO AUTOMOTIVE RELAY

### FEATURES

- Quick connect terminals
- 40 Amp contact rating
- High operating temperature (125°C)
- Epoxy sealed versions available
- Plastic or steel mounting bracket available
- Resistor or diode parallel to coil available
- ISO/TS 16949, ISO14001
- Tested in accordance with SAE J2544



### CONTACTS

<b>Arrangement</b>	SPST (1 Form A) SPDT (1 Form C) SPST NO DM (1 Form U) SPST (1 Form A2)
<b>Ratings</b>	Resistive load: Max. switched power: 630 W (SPST) 630 W (N.O.) 473 W (N.C.) Max. switched current: 40 A (SPST) 40 A (N.O.) 30 A (N.C.) Max. switched voltage: 75 VDC
<b>Material</b>	Silver tin oxide
<b>Resistance</b>	< 100 milliohms initially (6 V, 1 A voltage drop method)

### COIL

<b>Power</b>	
<b>At Pickup Voltage (typical)</b>	0.68 W
<b>Max. Continuous Dissipation</b>	4.8 W at 20°C (68°F)
<b>Temperature Rise</b>	75°C (135°F) at nominal coil voltage (40A)
<b>Temperature</b>	Max. 125°C (257°F)

### GENERAL DATA

<b>Life Expectancy</b> <b>Mechanical</b> <b>Electrical</b>	Minimum operations 1 x 10 <sup>7</sup> 1 x 10 <sup>5</sup> at 40 A 14 VDC Res.
<b>Operate Time (max.)</b>	7 ms at nominal coil voltage
<b>Release Time (max.)</b>	5 ms at nominal coil voltage
<b>Dielectric Strength (at sea level for 1 min.)</b>	500 Vrms coil to contact 500 Vrms contact to contact
<b>Insulation Resistance</b>	100 megohms min. at 500 VDC, 20°C 50% RH
<b>Dropout</b>	Greater than 15% of nominal coil voltage
<b>Ambient Temperature</b> <b>Operating</b> <b>Storage</b>	-40°C (-40°F) to 125°C (257°F) -55°C (-67°F) to 155°C (311°F)
<b>Vibration</b>	0.062" DA at 10-40 Hz
<b>Shock</b>	15 grams
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy 0.25 Quick Connect Note: Allow suitable slack on leads when wiring, and do not subject the terminals to excessive force.
<b>Weight</b>	31 grams

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.



**AMERICAN ZETTLER, INC.** [www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

# AZ9731

## RELAY ORDERING DATA

COIL SPECIFICATIONS			
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$
6	3.9	7.8	22.5
12	7.8	15.6	90
24	15.6	31.2	360

## RELAY ORDERING DATA

### AZ9731-1C-12DC2 R1

- Blank - Standard no diode, no resistor
- R1 - 180 Ohm  $\frac{1}{2}$  w resistor in parallel with 6 V coil  
680 Ohm  $\frac{1}{2}$  w resistor in parallel with 12 V coil  
2700 Ohm  $\frac{1}{2}$  w resistor in parallel with 24 V coil
- D2 - 1N4005 diode in parallel with coil, cathode on #86 terminal
- C1 - Plastic dust cover with steel mounting bracket
- C1E - Plastic dust cover with steel mounting bracket, sealed
- C2 - Plastic dust cover with plastic mounting bracket
- C2E - Plastic dust cover with plastic mounting bracket, sealed
- C3 - Plastic dust cover
- C3E - Plastic dust cover, sealed
- C4 - Plastic dust cover, shrouded, with metal mounting bracket, sealed
- 24D - 24 volt coil
- 12D - 12 volt coil
- 6D - 6 volt coil
- 1A - SPNO Single pole normally open
- 1C - SPDT Single pole double throw
- 1U - SPST NO DM Single pole N.O. double make
- 1A2- SPNO Single pole normally open (2x)
- Basic series designation - AZ9731




**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

# AZ9731

## MECHANICAL DATA

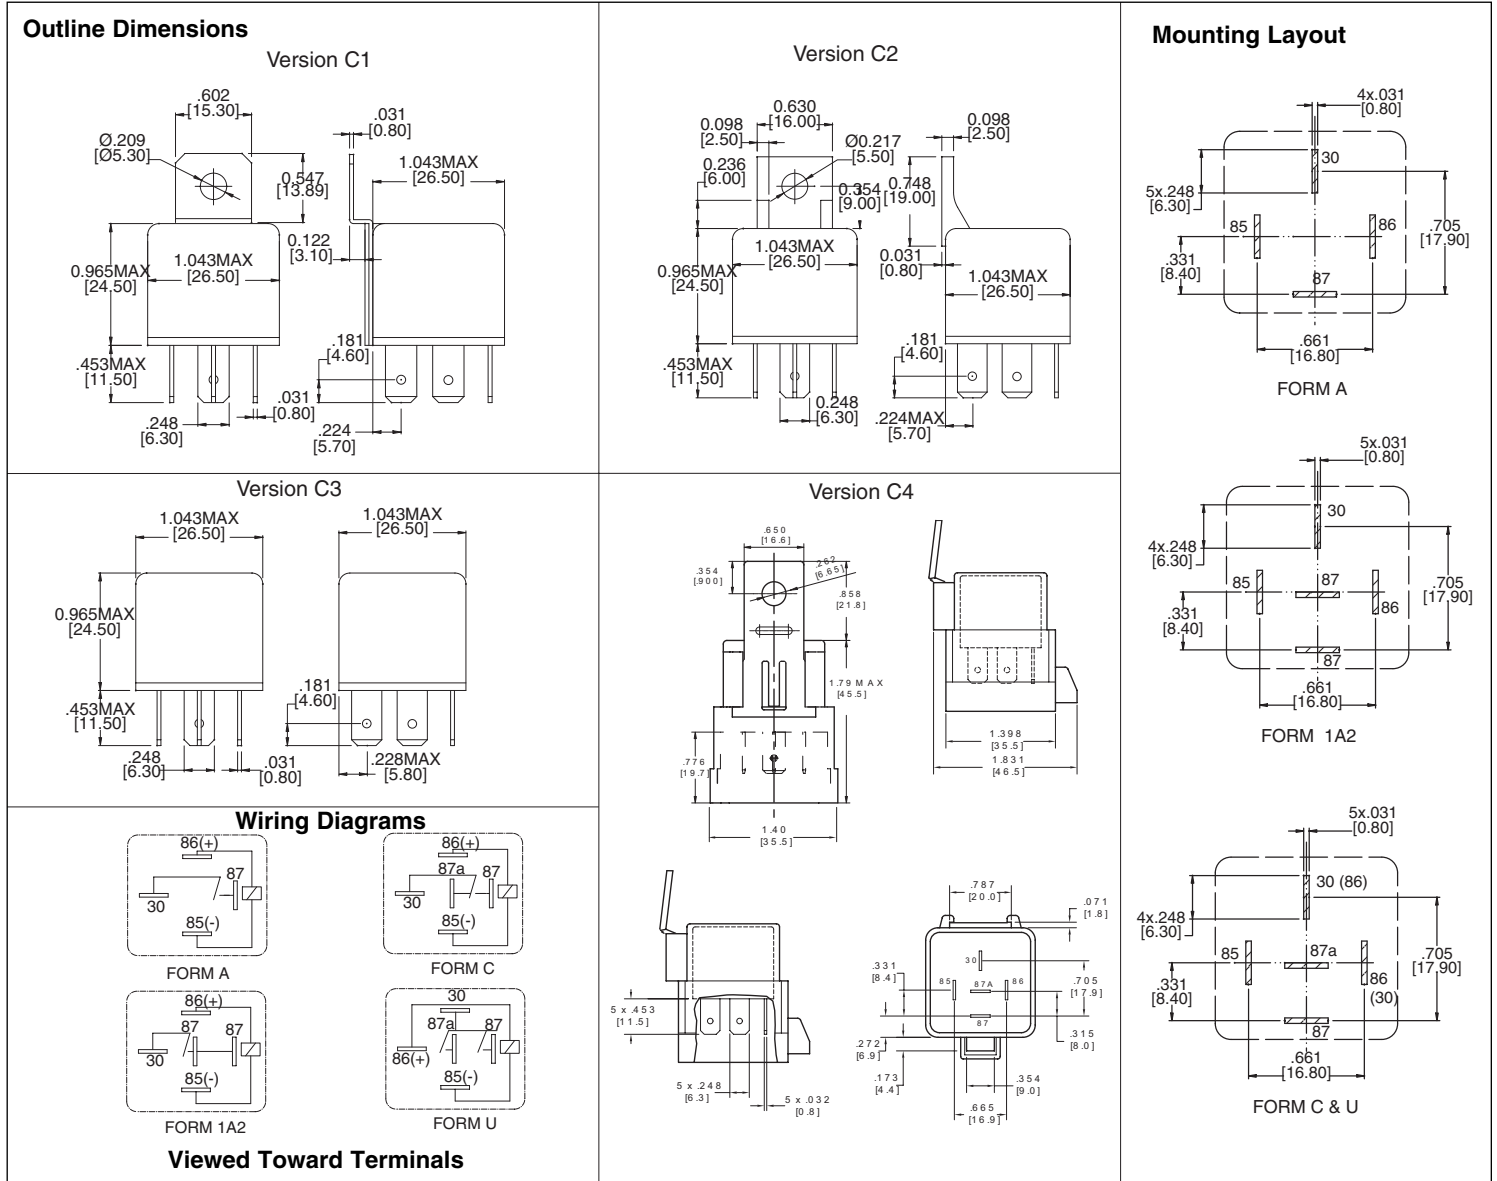

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010''$




**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

## Sockets & Hardware for AZ9731

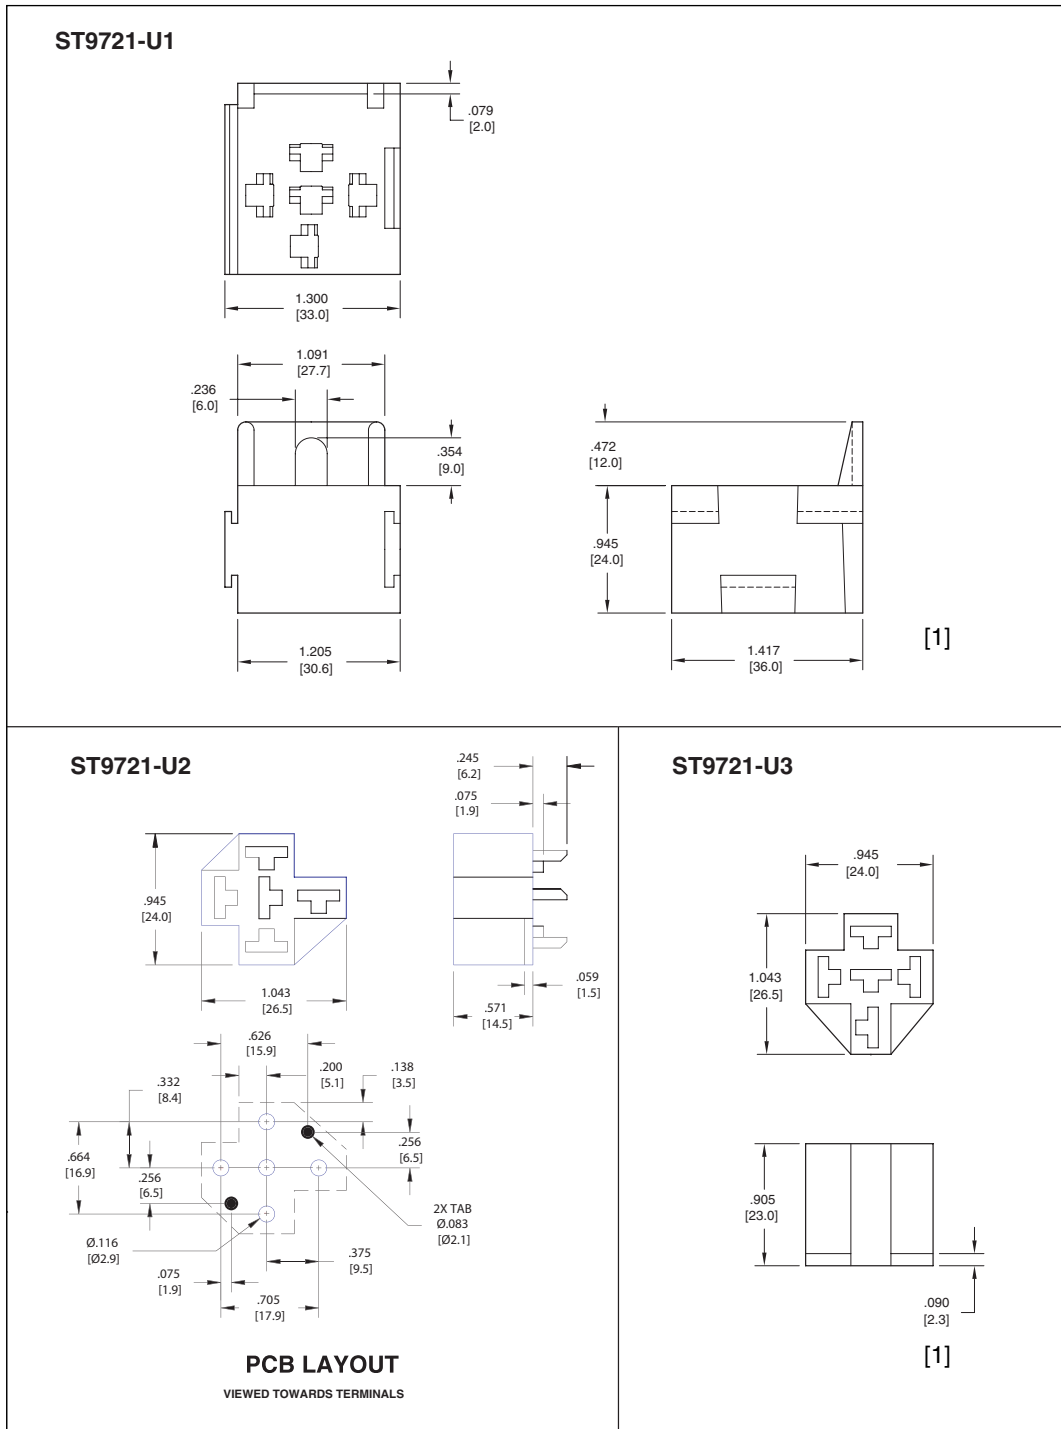

[1] Recommended receptical connector Amp Part numbers are 5-160558-9 or 5-1605-26-9

