


## 400-1800, "PP3" size Battery Holder - Solder tag connection

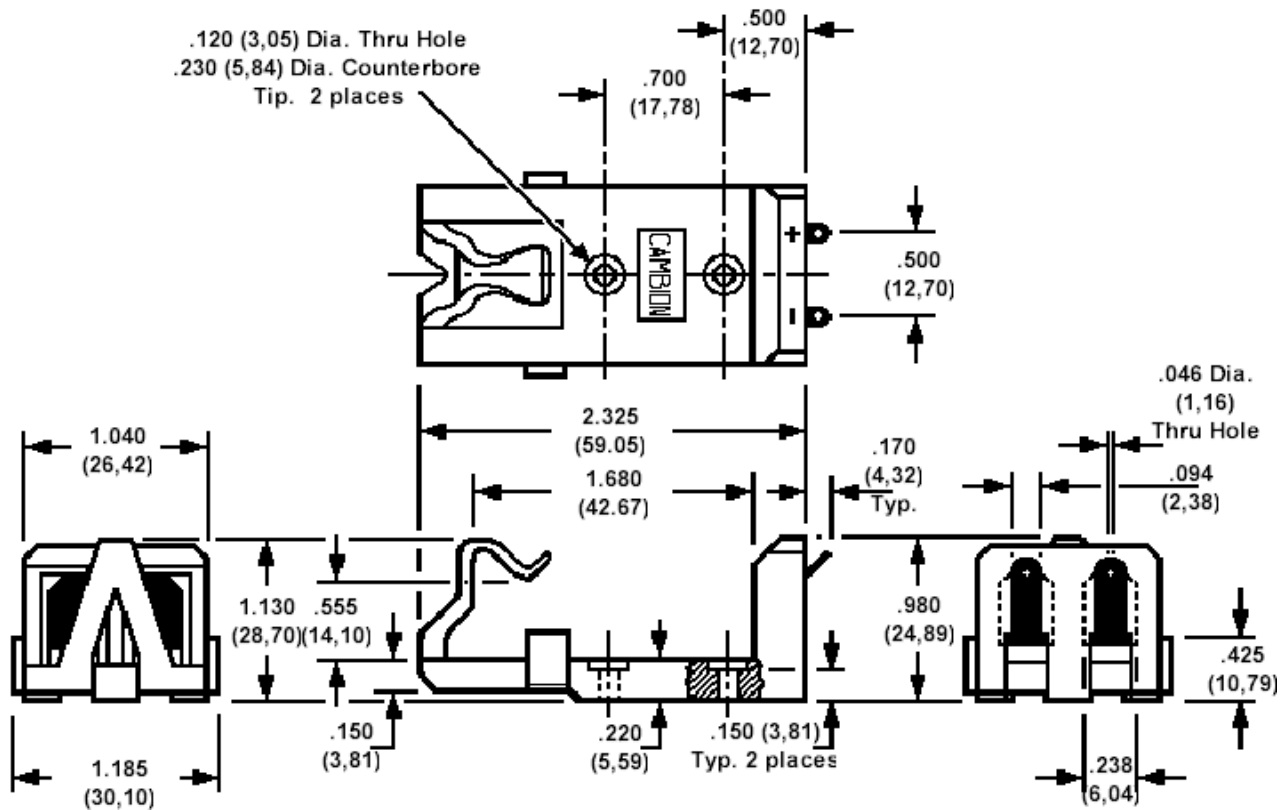

Rec. Mounting Holes - .062 (1,57) Dia., on pitch of 0.500 (12,70) centres, plus bolt down holes per drawing  
 Suited for use on boards up to .125 (3,18) thick

How to order code  
400-1800-01-00-20  
 Basic Part No

### FEATURES

Single Piece Construction
Requires No Snap on Battery Connection
Shockproof Battery Retention

### BATTERY INSERTION/REMOVAL PROCEDURE

<b>Insertion</b>	Pull back moulded clip part of holder, and slide flat end of battery down into the holder. Drop contact end of battery into position, and release clip
<b>Removal</b>	Pull back moulded clip part of holder, and lift battery out of holder, contact end first.

Component	Material	Finish
Body	PBT	Colour - Natural
Spring and Solder Tail	Phosphor Bronze	Electro Tin

Mechanical tolerance unless otherwise stated  $\pm 0.010(0,25)$