
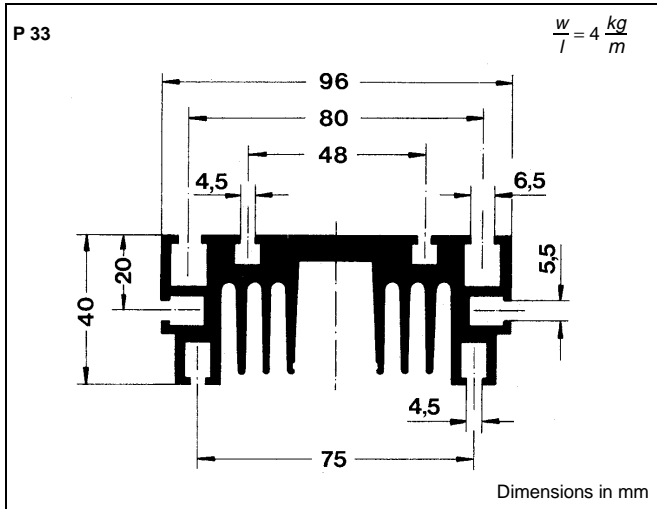


Heatsink

P 33

Standard lengths ¹⁾	n	R _{thha} ²⁾ natural cooling °C/W	w g
P 33/100	1	1,90 (40 W)	400
	2	1,85 (40 W)	
P 33/180	3	2,24 (60 W)	720
P 33/200	3	1,16 (60 W)	800



Features

- Intended for isolated power modules; the SEMIPACK and SEMITRANS ranges, and also for the SEMIPONT bridge rectifier range
- Mounting channels are provided for additional accessories
- Available in various lengths

¹⁾ Non-standard lengths available on request

²⁾ At the given total power dissipation

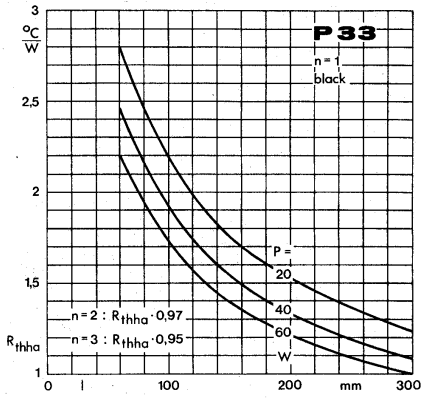


Fig. 2 Thermal resistance per component vs. length