

	PART NO.		REVISIONS									
	R-FD31G0000100C	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE		
		-	А	RELEASED	Kiran	19/06/09	Suresh	19/06/09	Farnell	03/07/09		







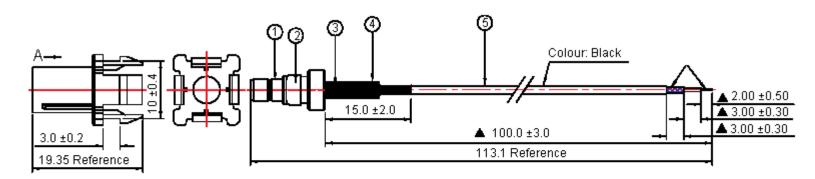

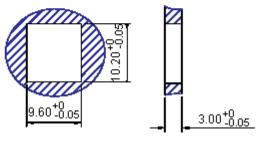

Recommended Mounting Hole

Dimensions : Millimetres

Specifications:

Electrical Performance:	
Impedance	: 50Ω.
Frequency range	: DC to 2.2GHz.
Maximum working voltage	: 60V rms.
Minimum dielectric withstanding voltage	: 200V rms.
Minimum insulation resistance	: 500M Ω.

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:				
information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with- out notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or ornision from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or	UNLESS OTHERWISE	Kiran	19/06/09	Fakra D - Tinned Free End Cable - 100mm				
	SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	CHECKED BY:	DATE:	SIZE DWG NO.		ELECTRONIC FILE	REV	
		Suresh	19/06/09		M10002257	1714785-TDS DWG	А	
		APPROVED BY:	DATE:		I			
or restrict the Group's liability for death or personal injury resulting from this negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Farnell plc 2009.		Farnell	03/07/09	SCALE: NTS	U.O.M.: mm	SHEET: 1 OF	- 2	

multicomp	PART NO.		REVISIONS									
	R-FD31G0000100C	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE		
		-	A	RELEASED	Kiran	19/06/09	Suresh	19/06/09	Farnell	03/07/09		

Specification Table

Item	Description	Part Number
1	Fakra Code D B/H Plug, Crimp Type, For \01.37mm Cable	
2	Insulation for R-FD32201-F	
3	R-FD32201-F Inner Ferrule for ϕ 1.37 Cable	R-FD31G0000100C
4	Heat Shrink Tube F32, ¢2.5mm, L = 15.0mm, Colour: Black	
5	$\phi 1.37mm$ Cable, Tin Plated, Colour: Black	

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

The Group for are incensed to it, we increase signified on the use of it of the final for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with- out notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			able 100mm	
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	Kiran	19/06/09	ј гакга і	D - Tinned Free End Cable - 100mm			
		CHECKED BY:	DATE:	SIZE DWG NO.		ELECTRONIC FILE 1714785-TDS DWG		REV
		Suresh	19/06/09		M10002257			A
		APPROVED BY:	DATE:					
		Farnell	03/07/09	SCALE: NTS	U.O.M.: mm		SHEET: 2 ()F 2