


SPECIFICATIONS

PARAMETERS	VALUES	UNITS
Rated Input	0.1	W
Maximum Input	0.2	W
Frequency Range	750 ~ 4000	Hz
Resonant Frequency at Free Air (1V)	750±150	Hz
Impedance at 1 kHz / 1 V	8±15%	Ohm
SPL at 0.1 W / 10 cm (1.0, 1.2, 1.5, 2.0 kHz average)	88±3	dB
Operating Temperature	-20 ~ +55	°C
Weight	8	g

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	04/11/02	

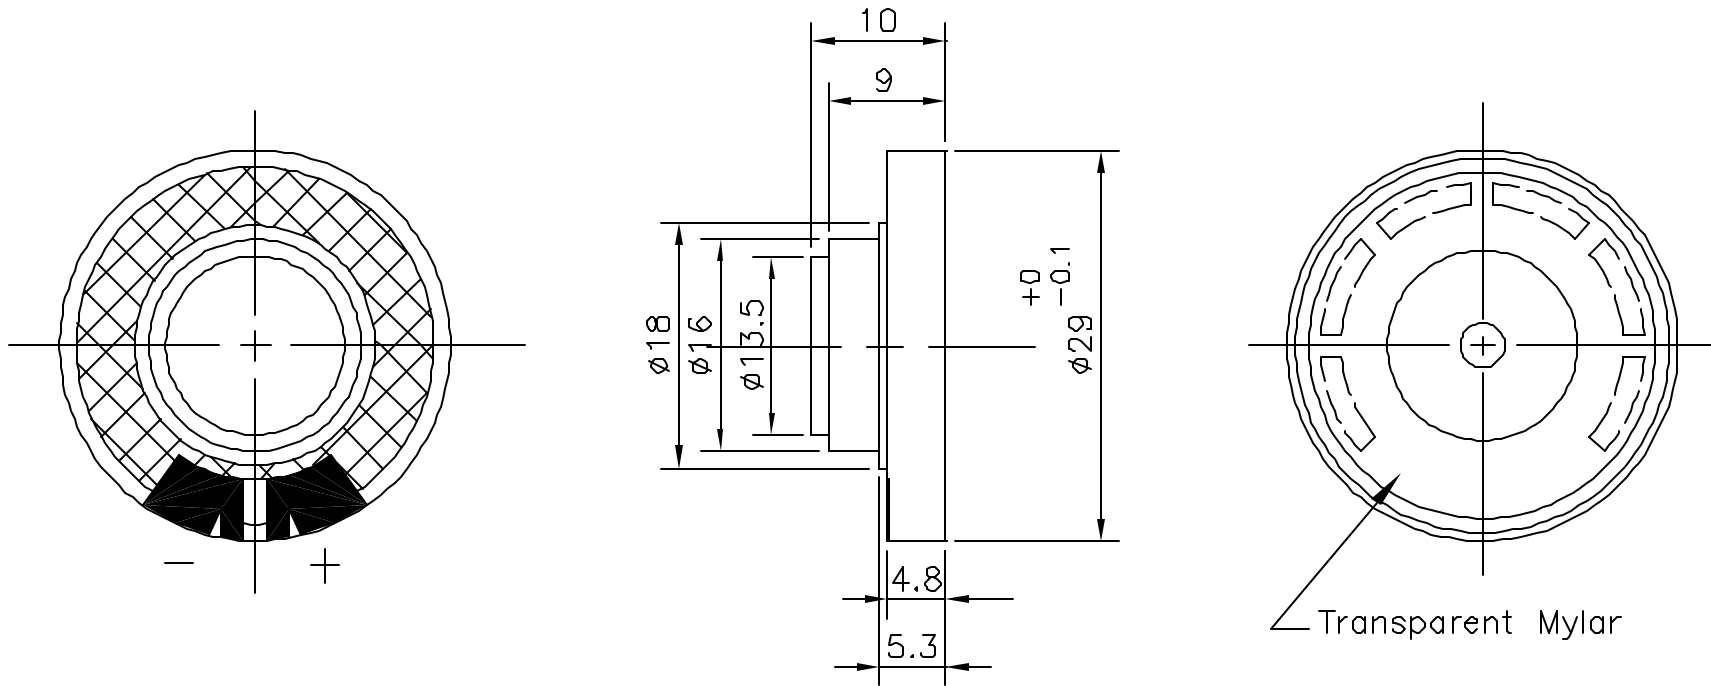

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

DRAWING NAME
ADS2908

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ± 0.5 ±
XXX ±

APPROVALS	DATE
DRAWN <i>RABL</i>	04/02
CHECKED	
APPROVED <i>S.J.</i>	04/11/02
DO NOT SCALE DRAWING	

		Dayton, Ohio	
MINIATURE SPEAKER TRANSDUCER ADS-2908			
SIZE A	MATERIAL N/A	DRAWING NO. ADS2908.DWG	
SCALE	MAX. WT.	SHEET 1 OF 1	