

## JTH Series



- 4:1 Input Range
- 1500 VDC Isolation
- Efficiency up to 86%
- -40 °C to +100 °C Operating Temperature
- Optional Remote On/Off
- Single & Dual Outputs
- 3 Year Warranty

## Specification

## Input

Input Voltage Range	• 24 V (9-36 VDC) 48 V (18-72 VDC)
Input Current	• See table
Input Filter	• Pi network
Input Reflected Ripple Current	• 35 mA rms through 12 $\mu$ H inductor, 5 Hz to 20 MHz
Input Surge	• 24 V models 50 VDC for 100 ms 48 V models 100 VDC for 100 ms

## Output

Output Voltage	• See table
Voltage Balance	• $\pm 1\%$
Minimum Load	• No minimum load required
Line Regulation	• $\pm 0.5\%$
Load Regulation	• $\pm 0.5\%$ 10-100% load, $\pm 1.0\%$ below 10% load
Setpoint Accuracy	• $\pm 1\%$
Start Up Rise Time	• <20 ms
Start Up Delay	• <10 ms
Ripple & Noise	• 75 mV pk-pk 20 MHz bandwidth
Transient Response	• 3% max deviation, recovery to within 1% in 200 $\mu$ s for 25% load change
Temperature Coefficient	• 0.02%/°C
Overcurrent Protection	• 140% typical of full load at nominal input
Short Circuit Protection	• Trip & restart (Hiccup mode), auto recovery
Remote On/Off	• Optional - see Application Note. On = +2.5 to +5.5 VDC or open circuit Off = -0.7 to +0.8 VDC or short circuit

## General

Efficiency	• See table
Isolation	• 1500 VDC Input to Output 1000 VDC Input to Case 1000 VDC Output to Case
Isolation Capacitance	• 1200 pF typical
Switching Frequency	• 300 kHz typical
MTBF	• >1.21 Mhrs to MIL-HDBK-217F at 25 °C, GB

## Environmental

Operating Temperature	• -40 °C to +100 °C, derate from 100% load at +60 °C to 0% load at +100 °C
Case Temperature	• 100 °C max
Cooling	• Convection-cooled
Operating Humidity	• Up to 95% RH, non-condensing
Storage Temperature	• -40 °C to +125 °C

## EMC

Emissions	• EN55022 Class A conducted & radiated with external components, see application note
ESD Immunity	• EN61000-4-2, 8 kV air discharge Perf Criteria A, 4 kV contact discharge Perf Criteria A
Radiated Immunity	• EN61000-4-3, Level 2 3 V/m Perf Criteria A
EFT/Burst	• EN61000-4-4, Level 1 Perf Criteria B
Conducted Immunity	• EN61000-4-6, 3 V Perf Criteria A
Magnetic Field	• EN61000-4-8, 1 A/m Perf Criteria A

## Models and Ratings

Input Voltage Range	Output Voltage	Output Current	Input Current <sup>(1)</sup>		Efficiency	Max Capacitive Load	Model Number <sup>(2)</sup>
			No Load	Full Load			
9-36 VDC	3.3 V	3000 mA	25 mA	515 mA	80%	3300 µF	JTH1524S3V3†^
	5.0 V	3000 mA	25 mA	753 mA	83%	3300 µF	JTH1524S05†^
	12.0 V	1250 mA	25 mA	735 mA	85%	680 µF	JTH1524S12†^
	15.0 V	1000 mA	25 mA	726 mA	86%	470 µF	JTH1524S15†^
	±5.0 V	±1500 mA	25 mA	753 mA	83%	±2200 µF	JTH1524D05†^
	±12.0 V	±625 mA	25 mA	735 mA	85%	±470 µF	JTH1524D12†^
	±15.0 V	±500 mA	25 mA	726 mA	86%	±330 µF	JTH1524D15†^
18-72 VDC	3.3 V	3000 mA	20 mA	257 mA	80%	3300 µF	JTH1548S3V3†^
	5.0 V	3000 mA	20 mA	376 mA	83%	3300 µF	JTH1548S05†^
	12.0 V	1250 mA	20 mA	367 mA	85%	680 µF	JTH1548S12†^
	15.0 V	1000 mA	20 mA	363 mA	86%	470 µF	JTH1548S15†^
	±5.0 V	±1500 mA	20 mA	376 mA	83%	±2200 µF	JTH1548D05†^
	±12.0 V	±625 mA	20 mA	367 mA	85%	±470 µF	JTH1548D12†^
	±15.0 V	±500 mA	20 mA	363 mA	86%	±330 µF	JTH1548D15†^

### Notes


1. Measured at nominal input voltage.

2. For optional Remote On/Off, add suffix '-R' to model number.

† Available from Farnell. See pages 266-269.

^ Available from Newark. See pages 270-272.

## Mechanical Details

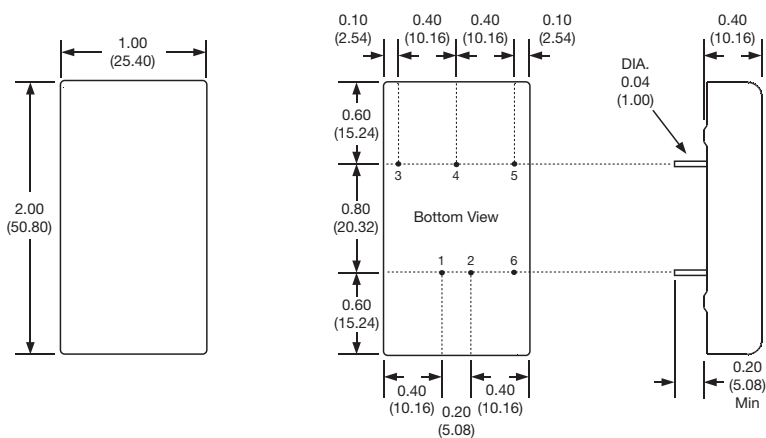

PIN CONNECTIONS		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No pin	Common
5	-Vout	-Vout
6*	ROF*	ROF*


\* Pin 6 only present with optional Remote On/Off

All dimensions are in inches (mm).  
Case tolerance: +/- 0.02 (+/-0.5)  
Pin diameter: 0.04 +/- 0.002 (1.0 +/- 0.05)

Pin pitch tolerance: +/-0.014 (+/-0.35)  
Weight: 0.07lbs (30g)

## Application Notes

### Derating Curve

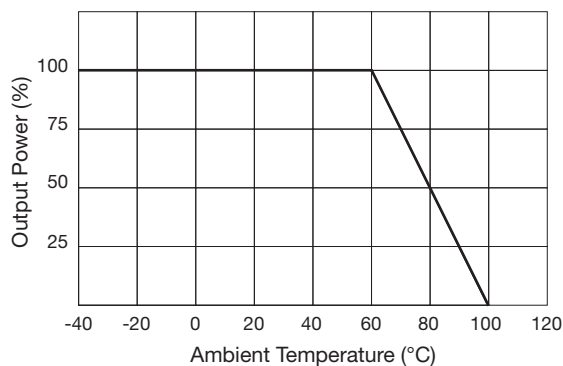

### Optional Remote On/Off

On = +2.5 to +5.5 VDC on pin 6 WRT pin 2 or open circuit  
Off = -0.7 to +0.8 VDC on pin 6 WRT pin 2 or short circuit pin 2 & 6

Input current is typically 2.5 mA when output is remotely switched off.

### Input Filter

