

Customer: ROXBURGH ELECTRONICS LIMITED

No. SSV96-0304

Date: Jan. 29, 1996

Attention: \_\_\_\_\_

Your ref. No: \_\_\_\_\_

Your Part. No: 22 6074

# SPECIFICATIONS

ALPS:

MODEL RS451114  
( 50 kB )

**F.E.C. No: 698-040**

Sample No. : G0444749M

RECEIPT STATUS

RECEIVED

By. Date \_\_\_\_\_

Signature \_\_\_\_\_

Name

Title

ALPS ELECTRIC CO., LTD.

HEAD OFFICE  
1-7, YUKIGAYA-OHTSUKA-CHO,  
OHTA-KU, TOKYO 145 JAPAN

DSG'D

*Y. Saitoh*

APP'D

*M. Umeyori*

ENG. DEPT. DIVISION

Sales \_\_\_\_\_

## SPECIFICATIONS


1. THIS SPECIFICATIONS APPLY TO RS4511114 POTENTIOMETERS.

2. CONTENTS OF THIS SPECIFICATIONS.

4S4512-362M, 4S0008-45M  
4S0001-200, 4S0001-201  
S4518G402A

3. MARKING

· MARKING ON ALL UNITS  
DATE CODE, RESIST. VALUE, TAPER, TRADE MARK

Marking  in specifications shows  
standard and condition for application

CLASSNO.	TITLE
	STANDARD TYPE POTENTIOMETER (SLIDE)

ELECTRICAL

- Overall resistance :  
Overall resistance tolerances :  $\pm 20\%$  Unit : K $\Omega$

5	10	20	50	100	200	250	500	1,000
---	----	----	----	-----	-----	-----	-----	-------

- Minimum resistance :  
Overall resistance (K $\Omega$ )  
Across term. 1-2  
Across term. 2-3

5, 10	20, 50	100	200	500	1000
30	50	70	120	220	320
50	100	200	300	500	500

3. Taper : ALPS "B" (SBS49)

4. Rated power : 0.25 Watts.

5. Rated voltage : Rated voltage =  $\sqrt{P \cdot R}$  (V)

P : rated power (W)  
R : nominal overall resistance ( $\Omega$ )  
When the rated voltage exceeds the maximum operating voltage the maximum operating voltage shall be the rated voltage.

Maximum operating voltage : A.C. 200V, D.C. 10V

6. Dielectric test : Units shall be designed to withstand 300 volts A.C. 50 Hz R.M.S. between resistance elements and case for a period of one minute without damage or arcing.

7. Insulation resistance : Greater than 100 megohms between resistance elements and case when tested by a 250 volts D.C. insulation resistance meter.

8. Sliding lifetest : 15,000 cycles


\* Lever shall be operable with speed of 20 mm per sec. without noise by static electricity.

OR

SYMB	DATE	APPD	CHKD	DSGD	TITLE	SPECIFICATIONS
					ALPS ELECTRIC CO., LTD.	
					DOCUMENT NO.	4S4518-302M

USED ON	NAME
45 mm	RESISTANCE TAPER
ALPS	TITLE
	SPECIFICATIONS
	TRAVEL TYPE
	TONE
	ALPS ELECTRIC CO., LTD.
	1-7 YUKIGAYA OTSUKA-CHO
	OTA-KU TOKYO JAPAN

TAPERED CURVE: ALPS "B"

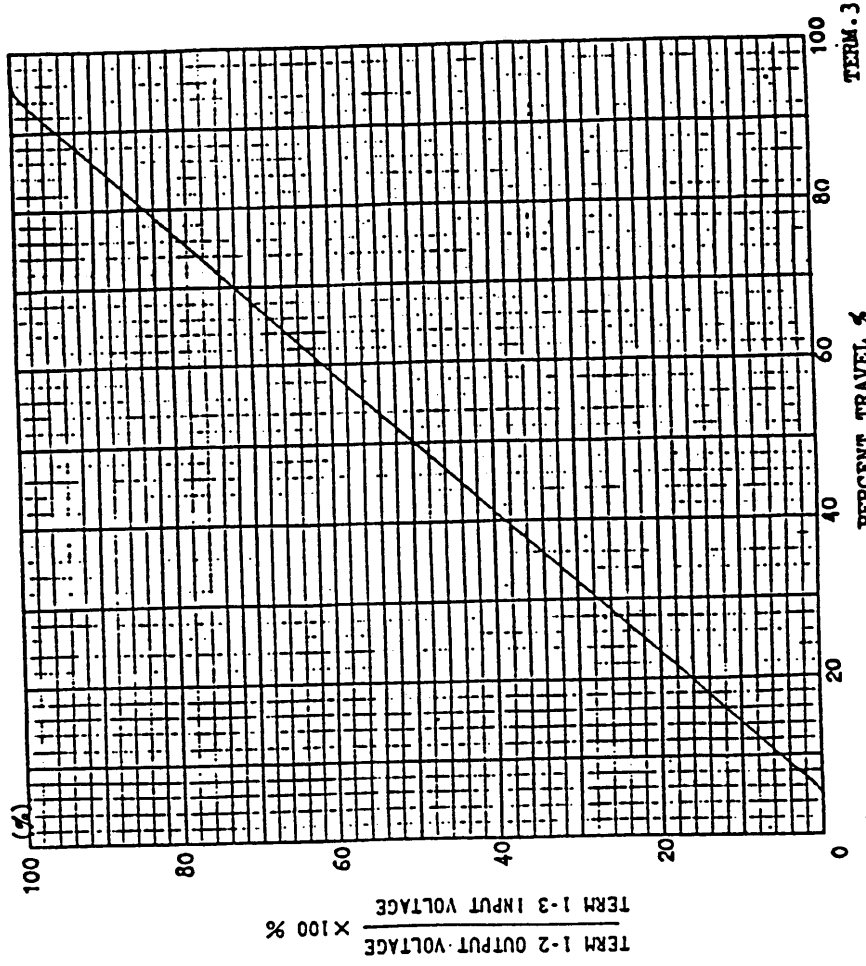

NOTES: PERCENT VOLTAGE CHECK POINT  
50% TRAVEL FROM TERM. 1  
TOLERANCE 40 - 60 %

APPD.	CHKD.	DSGD.	NAME
			RESISTANCE TAPER
DATE	CHKD.	DSGD.	DMG. NO.
			SBS49

CLASS.NO.

TITLE

STANDARD TYPE POTENTIOMETER (SLIDE)

MECHANICAL

1. Travel : Specified in particular Figure.
2. Operating force : 30 - 250 gf ( Note 1 )
3. Starting force : Operating force + 100 gf max. ( Note 1 )  
(Note 1) Measuring temperature : 5°C - 35°C

Measuring point :

- ➔ : 5 mm from lever end (Lever length > 6 mm)
  - : 1 mm from lever end (Lever length ≤ 6 mm)
- Sliding speed : 20 mm per sec.

4. Stop strength :

- ➔ 5 kgf at a position 5 mm from mounting surface.  
(Lever length > 6 mm)
- 5 kgf at a position 2 mm from mounting surface.  
(Lever length ≤ 6 mm)

5. Lever lateral play :

When an alternating bending moment of 250 gf.cm is applied perpendicular to the direction of lever travel, the bothside movement of the lever shall be less than 2 ( 2 X L / 20 ) mm

L: Lever length on the measurement point from mtg. surface.  
(Note 2) Exempt warping of insulated lever.

Lever lateral play



M = 250 gf.cm

$L \leq 5$  mm  
The bothside movement of the lever shall be less than 1.2 mm

6. Lever strength :

- (1) To be resistant with 5 kgf static force of pull or push applied to lever in thrust direction for 10 seconds without damage.

ALPS ALPS ELECTRIC CO., LTD.

TITLE SPECIFICATIONS

DOCUMENT NO. 4 S 0 0 8 - 4 5 M (1/2)

DATE	APPRO	CHKD	DSGD


CLASS.NO.

TITLE

STANDARD TYPE POTENTIOMETER (SLIDE)

- (2) To be resistant with following static force applied to lever in vertical direction to lever driving for 10 seconds without damage.

- ① 2 kgf.cm over : in case of pot., mounted to chassis with screws.
- ② 0.5 kgf.cm over : in case of pot., mounted to P.C.B. only with terminals.
- ③ 2 kgf.cm over : in case of pot., mounted to P.C.B. with both terminals and mounting plate.




(1)

7. Lever inclination and twist :


Twist



Inclination



Inclination



8. Resistance to soldering heat : 3 sec. max. at 300°C

ALPS ALPS ELECTRIC CO., LTD.

TITLE SPECIFICATIONS

DOCUMENT NO. 4 S 0 0 8 - 4 5 M (2/2)

DATE	APPRO	CHKD	DSGD

ご使用上の注意

**PRECAUTION IN USE**

1. 偏心ツマミをご使用になる場合

レバーの中心より離れたところを作用点としてご使用になる場合、可能な限り  
下図A寸法を短くしてご使用下さい。


If it will be used the operating point away from the center line of the lever, it should be shorter as possible.

2. レバー長さについて

レバー長さについては、ツマミを含めて、下図B面より極力短いものをご使用願います。レバー長さについては、作用点までの距離が短いほどしゅう動感が良好となり、長いほど好ましくない感触になります。

About the length of lever  
If conditions permit, it is advisable to use the shortest possible lever.

The longer the length up to operating point, the more unfavorable slide feeling will be given.

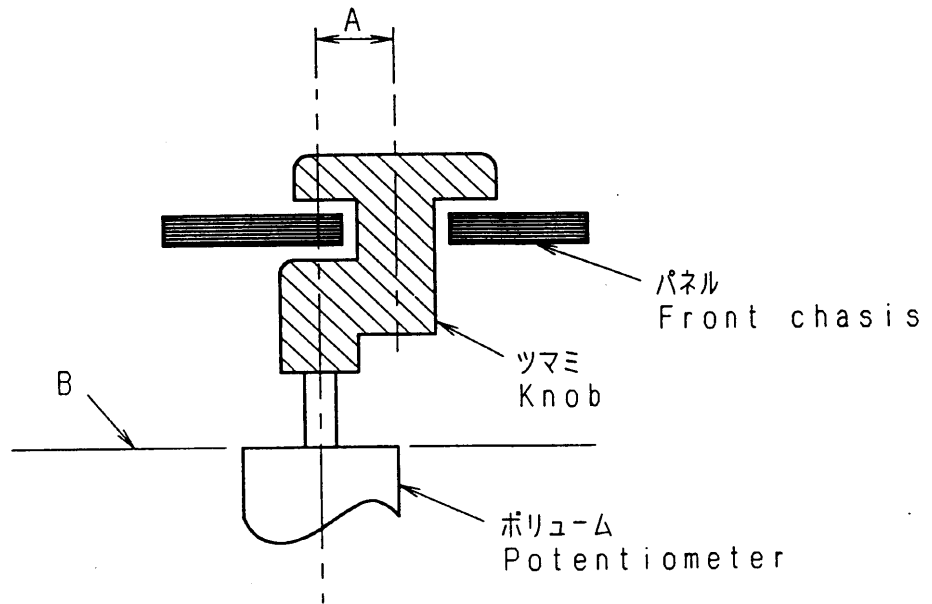

3. レバーの駆動に関しては上記内容を考慮の上、セット実装を行い  
あらかじめ異常のないことをご確認願います。

Regarding the operation of the lever, please consider the above mentioned, and make sure nothing is wrong with the operation under installing in your appliance that you plan to use our products actually.

4. ツマミ挿入及びレバー操作は、ポリウムマウント基板に  
ソリ(曲がり)のない状態で行って下さい。

Knob assembly on the lever and functioning the lever to be performed under the condition of P. C. B. without warp.

					<b>ALPS ALPS ELECTRIC CO., LTD.</b>				
					APPD.	CHKD.	DSGD.	TITLE	スライドポリウム仕様書 SPECIFICATIONS
					PDI-ENGI '95.7.24 YOSIOKA	PDI-ENGI '95.7.24 KIMURA	PDI-ENGI '95.7.24 Y. SAITOH	DOCUMENT NO.	4S0001-200
ORIGINAL	'91-7-3	Y·Y	K·N	S·A					
SYMB	DATE	APPD	CHKD	DSGD					

はんだ付け条件

FOLLOEW THE NEXT CONDITIONS FOR SOLDERING

1. はんだ SOLDER

JIS Z 3282に規定の63% Snはんだを使用  
63% Sn solder specified in JIS Z 3282.

2. 使用基板 BOARD IN USE

両面スルーホール基板又は、片面銅張積層板 板厚  $t=1.6\text{mm}$   
Double-faces through-hole board or Single-face  
copper laid laminate board.  
Plate thickness ( $t$ ) = 1.6mm

3. 自動はんだ<DIP条件>

- (1) レバ位置 センター付近に設定願います。
- (2) フラックス比重  $0.83 \pm 0.01$  (発泡式)
- (3) フラックス高さ フリント基板の板厚の半分の位置にフラックスの上面が接するレベル(図1)  
又、ホリウム挿入面への流れ込みのないこと。(フラックス上がり、飛散に注意)
- (4) フリヒート温度  $100^\circ\text{C}$  max. 時間1分以内。(フリント基板のホリウム挿入側の温度)
- (5) はんだ温度  $260^\circ\text{C}$  max. 時間5秒以内。はんだ回数は1回までとする。

IN THE CASE OF DIP SOLDERING

(1) State of potentiometer

Position a lever in the vicinity of center.

(2) Specific Gravity of Flux

$0.83 \pm 0.01$  (foaming type)

(3) Height of Flux face

A level of the upper face of flux for reaching the position at a half of the plate thickness of printed board. (Fig. 1)

Further, no flow of flux invading on the surface of printed board on the side of installing potentiometer is allowed.

(4) Preheat condition

$100^\circ\text{C}$  max., within 1 minute


(Temperature on the side of installing printed board is designated.)

(5) Soldering condition

Solder temperature:  $260^\circ\text{C}$  max.

Soldering period : within 5 seconds

Time of soldering : only one time is permitted

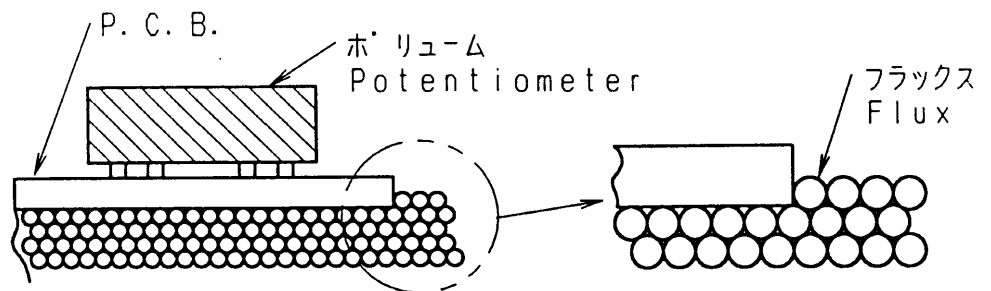

(Fig. 1)

4. 手はんだ IN THE CASE OF MANUAL SOLDERING

はんだ温度  $300^\circ\text{C}$  max. 時間3秒以内 はんだ回数は1回までとする。

Solder temperature :  $300^\circ\text{C}$  max.

Soldering period : within 3 seconds

Time of soldering : only one time is permitted

					<b>ALPS ALPS ELECTRIC CO., LTD.</b>			
					APPD.	CHKD.	DSGD.	TITLE
					PDI-ENGI '95.7.24 YOSIOKA	PDI-ENGI '95.7.24 KIMURA	PDI-ENGI '95.7.24 Y. SAITOH	スライト・ホリウム仕様書 SPECIFICATIONS 1/2
ORIGINAL	'91-9-3	Y·Y	S·A	S·S				DOCUMENT NO.
SYMB	DATE	APPD	CHKD	DSGD				4S0001-201