

927-077

**KINGSTATE** **PIEZO AUDIO BUZZER** **SMD TYPE**

Shape 1:1

KMI-1240

INDICATOR



Material: UL-94 V-0

KMT-1261

TRANSDUCER




Material: UL-94 V-0

Model Number	KMI-1240
Oscillating Frequency (KHz)	4.0 ± 0.5
Operating Voltage (VDC)	3~20
Current Consumption at 12VDC (mA, maximum)	8
Sound Pressure Level at 10cm/12VDC (dB, minimum)	83
Tone	Continuous
Operating Temperature ( °C )	-40~+85
Storage Temperature ( °C )	-40~+95
Weight (Gram)	2.6
Material	PPS UL-94 V-0
Packing Quantity (PCS/Tube)	25


Model Number	KMT-1261
Operating Voltage (Vp-p maximum)	20
Sound Pressure Level at 10cm/10Vp-p square wave (dB, minimum)	88 at 5.0 KHz
Current Consumption at 5.0KHz/10Vp-p square wave (mA, maximum)	10
Capacitance at 1KHz/1V (+-30%pF)	15,000
Operating Temperature ( °C )	-40~+85
Storage Temperature ( °C )	-40~+95
Weight (Gram)	2.6
Material	PPS UL-94 V-0
Packing Quantity (PCS/Tube)	25

Dimension


KMI-1240

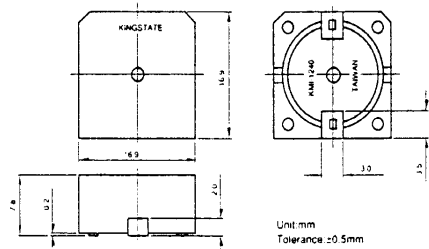

KMT-1261

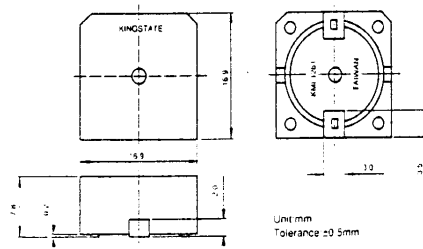

Characteristic

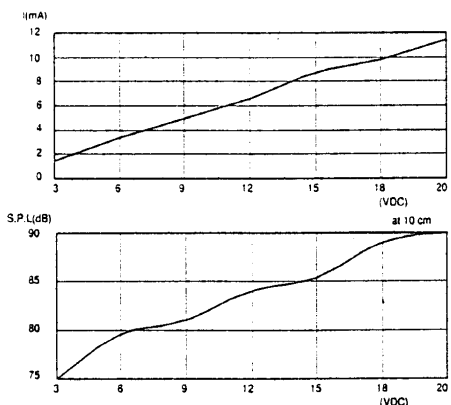

Frequency Curve

