
© COPYRIGHT 1997 BY SPC TECHNOLOGY. ALL RIGHTS RESERVED NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

			ν,
428 E	18	DCP#	
В	Α	REV	
CHANGE ELECTRONIC FILE NAME	RELEASED	DESCRIPTION	REVISIONS
DJC	D.J.C.	DRAWN	DOC. N
DJC 2/12/98	4/2/97	BATE	DOC. NO. SPC-FDO5, Tatal Pages! Effective: 3/3/97, DCP No: 103
JC	J.C.	СНЕСКО	5, Tatal P
JC 2/17/98 JC 2/17/98	D.J.C. 4/2/97 J.C. 4/15/97 B.B. 4/16/97	DRAWN DATE CHECKD DATE APPRVD DATE	DOC. NO. SPC-FD05, Tatal Pages: 2 Effective: 3/3/97, DCP No: 103 Supersedes DCP No: 97
JC	в.в.	APPRVD	reedes DC
2/17/98	4/16/97	DATE	'P No: 97

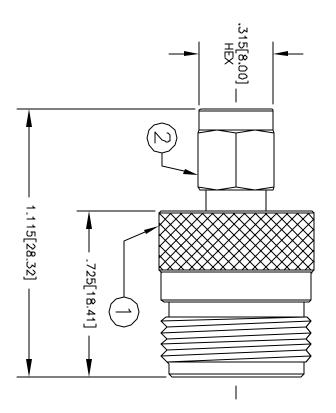

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 335 VRMS © SEA LEVEL FREQUENCY RANGE: 0-3 GHz

ITEM	_	2	3	4	Ŋ	თ	7	Ωο
M DESCRIPTION	BODY	SHELL	CONTACT	DIELECTRIC	DIELECTRIC	GASKET	RETAINING RING	PRESS FIT SLEEVE
QTY	_	_	_	_	1	_	_	1
MATERIAL	BRASS	BRASS	PHOSPHOR BRONZE GOLD	TEFLON	TEFLON	S.I. RUBBER	BeCu	BRASS
FINISH	NICKEL	NICKEL	GOLD	NONE	NONE	BRT ORANGE	NONE	NICKEL

SPC-FDG5.DWG