
ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
430	Α	RELEASED	JWM	1/14/02	НО	1/30/02	DJC	1/30/02

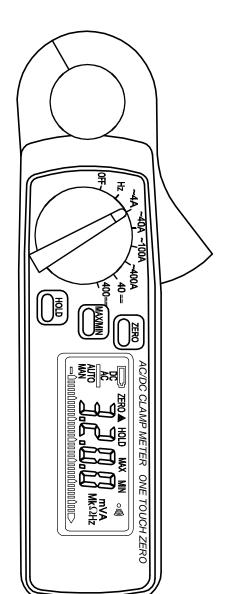

Display: 3\\\^4 LCD with 40 segment bargraph

Range Selection: Manual

Overload Indication: Left most digit blinks Power Consumption: 10mA (approx.)

Low Battery Indication: B

Sampling Time: 2 times/sec. (display)

20 times/sec. (bargraph)

Operating Temperature: -10°C to 50°C Operating Humidity: leass than 85 % relative

Storage Temperature: -20°C to 60°C Storage Humidty: less than 75 % relative

Indoor Use

Altitude: Up to 2000M

Conductor Size: 23mm max. (approx.) Size: 183mm(L) x 61.3mm(W) x 35.6mm(H)

7.2"(L) x 2.5"(W) x 1.4"(H)
Weight: 190g (battery included)
Accessories Included: Carrying Bag
User's Manual

1.5V (SUM-3) Batteries (2)

DC Current

Range	Resolution	Accuracy	Overload Protection			
40A	10mA	$\pm1.0\%\pm2dgts$				
400A (0~150A)	100mA	\pm 1.0% \pm 2dgts	DC 400A			
400A (150~200A)	100mA	\pm 2.2% \pm 2dgts	DC 400A			
400A (200~400A)	100mA	$\pm 4.0\% \pm 2 dgts$				

AC Current (True RMS, Crest Factor <=4)

		Accı		
Range	Resolution	50/60Hz	40~1KHz	Overload Protection
4A (0~500mA)	1mA	$\pm1.5\%\pm7$ dgts	$\pm 2.0\% \pm 7 dgts$	
4A (500mA~4A)	1mA	\pm 1.5% \pm 3dgts	$\pm 2.0\% \pm 4$ dgts	AC 400A
40A	10mA	\pm 1.0% \pm 3dgts	\pm 1.5% \pm 4dgts	
100A (0~100A)		\pm 1.0% \pm 3dgts	\pm 1.5% \pm 4dgts	
400A (100~200A)	100mA	$\pm2.2\%\pm3$ dgts	$\pm 2.5\% \pm 4$ dgts	AC 500A
400A (200~400A)		\pm 4.0% \pm 3dgts	±5.0% ±4dgts	

Frequency (Auto Range)

Range (Hz)	Resolution (Hz)	Accuracy	Sensitivity	Overload Protection
99.99~99.9K	0.01 ~ 10	$\pm 0.5\% \pm 2 dgts$	0.3A	AC 500A

SPC-F004.DWG

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOMO DUE CONTROL, THE USER SHALL DETERMINE THE SUITABLITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. DRAWN BY: DATE: DRAWING TITLE: UNLESS OTHERWISE AC/DC True RMS Clamp-On Meter 1/14/02 SPECIFIED, Jeff McVicker DIMENSIONS ARE CHECKED BY: DATE: ELECTRONIC FILE SIZE DWG. NO. REV FOR REFERENCE Hisham Odish 1/30/02 52F7511.dwg 72 - 6185Α PURPOSES ONLY. Α APPROVED BY: DATE: SCALE: NTS U.O.M.: INCHES [mm] SHEET: 1 OF 1 1/30/02 Daniel Carey