


Series S SIZE 00 .039 CENTERS

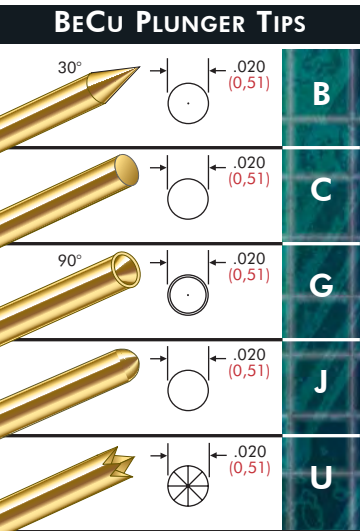



PROBE SPECIFICATIONS

Minimum Centers: .039 (0,99)
 Current Rating: 3 amps continuous
 Spring Force: 1.3 or 1.6 oz. @ .050 (1,27) travel
 Typical Resistance : <55 mΩ
 Working Travel: .050 (1,27)

Rated Force oz (gms)	Preload oz (gms)	Material
1.3 (37)	0.6 (17)	BeCu
1.6 (45)	0.7 (20)	SS

MATERIALS

Barrel: Nickel/silver, preplated gold
 Spring: Beryllium copper or stainless steel, gold plated
 Plunger: Full-hard beryllium copper, gold plated over nickel or optional Duralloy™
 Receptacle: Nickel/silver, gold plated
 Plug-In Terminal: Nickel/silver, gold plated

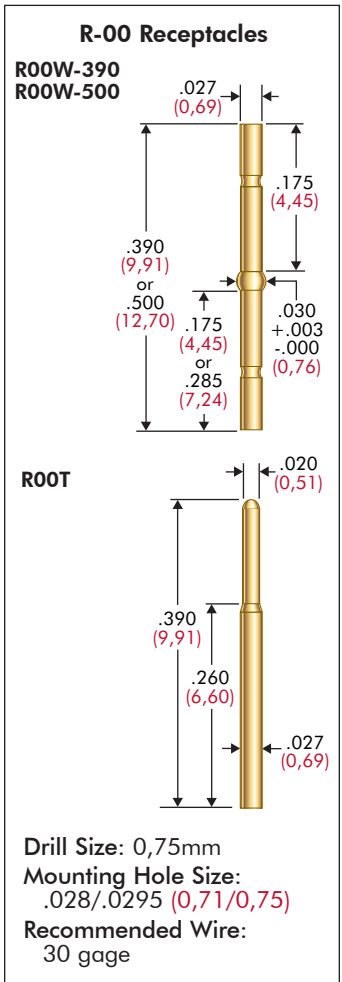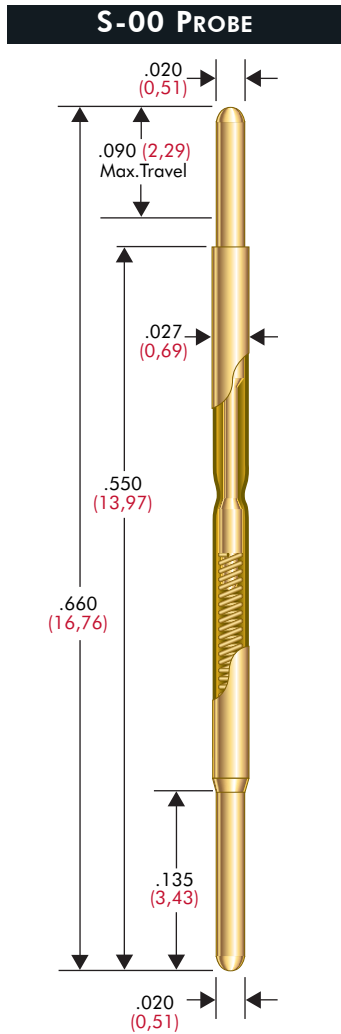

RECEPTACLE OPTIONS

Part Number	Style	Receptacle or Terminal Length	Probe/Receptacle Combined Length	Probe/Recep./Terminal Combined Length
R-00-W-390	Receptacle*	0.390 (9,91)	0.915 (23,24)	1.175 (29,85)
R-00-W-500	Receptacle*	0.500 (12,70)	1.025 (26,04)	1.285 (32,64)
R-00-T	Plug-In Terminal*	0.390 (9,91)	—	—

* To order with preattached wire, add wire length and strip length (in inches) to the end of the part number. For example: R-00-W-390-36-1

HOW TO ORDER: SPRING CONTACT PROBE RECEPTACLE

S SERIES	00 SIZE	J TIP STYLE	1.3 SPRING FORCE	G PLATING OPTIONS	R SERIES	00 SIZE	W TERMINATION	390 LENGTH
<p>SPRING FORCE: 1.3 oz. @ .050 (1,27) travel 1.6 oz. @ .050 (1,27) travel</p> <p>PLATING OPTIONS: G: Gold Plated Plunger D: Duralloy™ Plated Plunger</p>					<p>TERMINATIONS: W: Receptacle* T: Plug-In Terminal*</p> <p>LENGTHS: 390 or 500</p> <p>* To order with preattached wire, add wire length and strip length (in inches) to the end of the part number. For example: R-00-W-390-36-1</p>			
<p>CRIMPING PLIERS: CP00T CP00W-390 CP00W-500</p> <p>INSERTION TOOL: RT00</p>								

View updates of this information at www.idinet.com

Specifications subject to change without notice. Dimensions in inches (millimeters)