


Part No.	(6)Length	Part No.	(6)Length
3181A-1	1M	3181A-5	5M
3181A-2	2M	3181A-10	10M
3181A-3	3M		

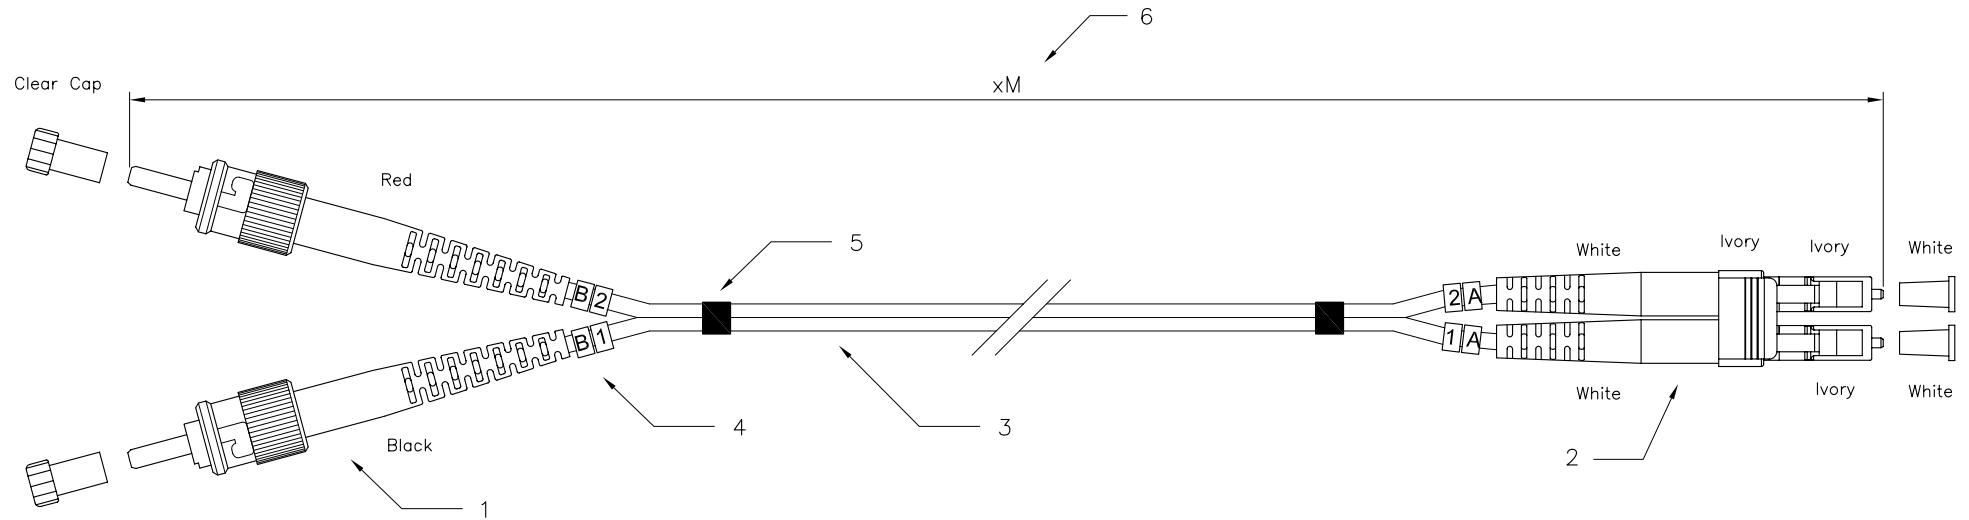

Specification:

1. Connector Type : ST/PC Multimode
2. Connector Type : LC/PC Multimode
3. Cable Type :
 - 3-1 Zipcord cable, $\phi 3.0\text{mm}$, 50/125um Multimode
 - 3-2 Calbe Jacket : Orange color, LSZH material
4. Cable Marker
5. Shrink Tube
6. Length : xM

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extention : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. Ferrule End-face Radius : $7 < R < 25\text{mm}$
- d. Apex Offset : $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max.
- f. Operation Temperature : -20° to $+70^\circ$
- g. Storage Temperature : -40° to $+80^\circ$
- h. Humidity (non-condensing) 95%RH

RoHS Compliant

	DSGN	CSQ	31.MAY.2007	ITEM NO: 3181A
	CHK	Maer	31.MAY.2007	
UNIT	M/M	APPR	Yty	ST to LC Duplex patch cord
SCALE	1/1			
DWG NO: 3181A	Videk Ltd			