


RabbitCore® RCM3600

Microprocessor Core Module

The RabbitCore RCM3600 is an extremely compact and low-cost Rabbit® 3000 microprocessor based core module designed for a wide variety of applications.

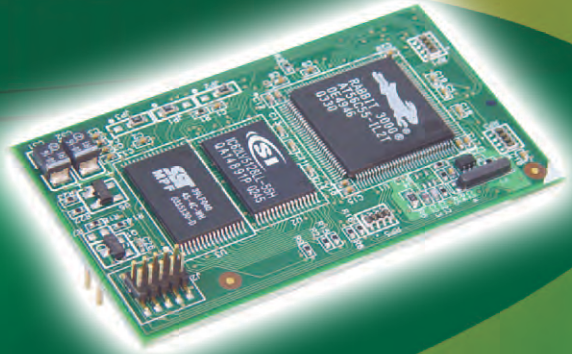


Overview

The RabbitCore RCM3600 is a perfect introduction into embedded control and monitoring. Its small size and ease of integration when paired with Dynamic C® allow engineers to develop a control and monitoring solution for many of today's applications. The RCM3600 mounts directly onto a user-designed motherboard with a single 2x20 dual row IDC header, interfacing with all types of CMOS-compatible digital devices. Built-in low EMI features, including a clock spectrum spreader, practically eliminate EMI problems, which helps with passing CE and RF emissions tests.

Rabbit hardware and Dynamic C are designed in a complementary fashion for maximum performance and ease of use in embedded systems. The additional software components in Dynamic C allow you to add functionality for customized embedded applications.

To evaluate and learn more about the RCM3600, please visit www.rabbit.com/products/rcm3600/.

Application Highlight

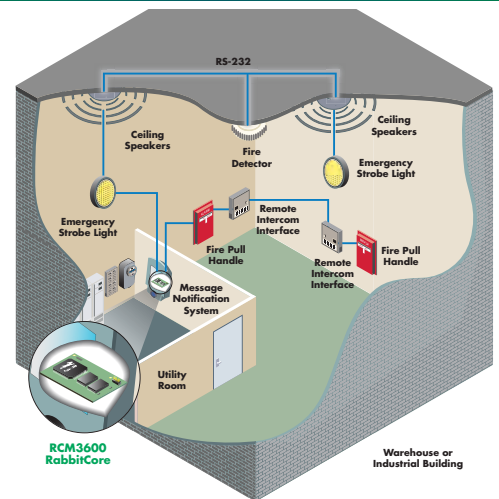


Potential Applications: Device intelligence, embedded control, sensor reading, serial device coordinator, handheld remote devices, and GPS/AVL applications.

Features and Benefits

- Rabbit 3000 microprocessor at 22 MHz
- Up to 512K Flash/512K SRAM
- 33 parallel digital I/O with configurable options
- 4 serial ports (IrDA, HDLC, async, SPI)
- 5V DC input, 3.3V DC interface
- Compact footprint: 2.11" x 1.23" x 0.62" (54 mm x 31 mm x 16 mm)
- Ready-made platform for fast time-to-market – save up to 3 months of design integration time
- Low-cost embedded microprocessor module

RabbitCore® RCM3600 Specifications

Feature	RCM3600	RCM3610
Microprocessor	Low-EMI Rabbit® 3000 at 22 MHz	
Flash Memory	512K	512K
SRAM	512K	512K
Backup Battery	Connection for user-supplied backup battery (to support RTC and SRAM)	
General-Purpose I/O	33 parallel digital I/O lines: • 31 configurable I/O • 2 fixed outputs	
Additional I/O	Reset	
Auxiliary I/O Bus	Can be configured for 8 data lines and 5 address lines (shared with parallel I/O lines), plus I/O read/write	
Serial Ports	Four 3.3V CMOS-compatible ports configurable as: • 4 asynchronous serial ports (with IrDA) or • 3 clocked serial ports (SPI) plus 1 HDLC (with IrDA) or • 1 clocked serial port (SPI) plus 2 HDLC serial ports (with IrDA)	
Serial Rate	Maximum asynchronous baud rate = CLK/8	
Slave Interface	A slave port allows the RCM3600 to be used as an intelligent peripheral device slaved to a master processor, which may either be another Rabbit 3000 or any other type of processor	
Real-Time Clock	Yes	
Timers	Ten 8-bit timers (6 cascadable), one 10-bit timer with 2 match registers	
Watchdog/Supervisor	Yes	
Pulse-Width Modulators	4 PWM output channels with 10-bit free-running counter and priority interrupts	
Input Capture/Quadrature Decoder	2-channel input capture can be used to time input signals from various port pins • 1 quadrature decoder unit accepts inputs from external incremental encoder modules or • 1 quadrature decoder unit shared with 2 PWM channels	
Power	5V ±0.25V DC 60 mA @ 22.1 MHz, 5V; 38 mA @ 11.06 MHz, 5V	
Operating Temperature	-40° C to +85° C	
Humidity	5% to 95%, non-condensing	
Connectors	One 2 x 20, 0.1" pitch	
Board Size	1.23" x 2.11" x 0.62" (31 mm x 54 mm x 16 mm)	
Pricing		
Price (qty. 1/100)	\$49 / \$39	\$45 / \$37
Part Number	20-101-0672	20-101-0673
Development Kit	\$239	
Part Number	101-0679	

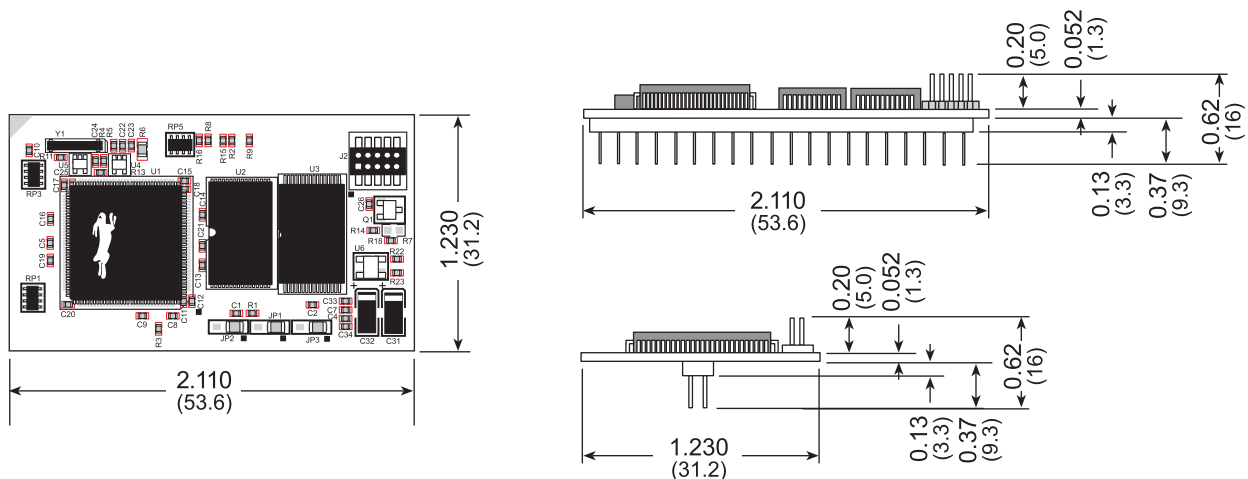

Rabbit® 2900 Spafford Street Davis, CA 95618 USA Tel 1.888.411.7228 Tel 530.757.8400 Fax 530.757.8402

© 2006-2010 Rabbit. All rights reserved. Rabbit is a Digi International brand. Rabbit RabbitCore, and Dynamic C are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.

91001599
A1/210