


150 927

Wherever the demand exists for a multi-power outlet the Stripbloc provides a highly versatile, space saving solution. Moulded in rugged black ABS and incorporating BEAB accepted components the Stripbloc is designed to comply with the CEE 22 European Standards.

Capable of providing multi-connections to one power source in varying environmental conditions (office, domestic or laboratory) full consideration has been given to safety and protection, with shuttered outlets and neon ON/OFF indicator and integral fuse as optional features.

Office equipment, hi-fi/audio units, laboratory instruments, lighting, small domestic appliances, personal and mini-computers, this compact multi-power outlet can connect up to 6 components

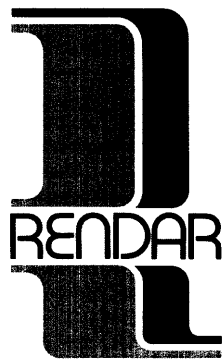


STRIPBLOC

safely and economically to one power source.

The Stripbloc is available with the following options.

1) Fitted with fixed 2 metre cable (13 amp plug optional). 6 sockets or 5 sockets with neon indicator and fuse. 2) Standard CEE 22 mains inlet. 3) Mains inlet filter version with 4 or 5 sockets. This version is particularly suited to sensitive electrical equipment where 'clean' power is essential for optimum performance. **CEE 22 straight and right angle re-wireable plugs R473.2 and R473.3 are available for use with the outlet.** A standard 13 Amp moulded plug with 2 metres of cable and a CEE 22 plug for the inlet and filter versions are also available.

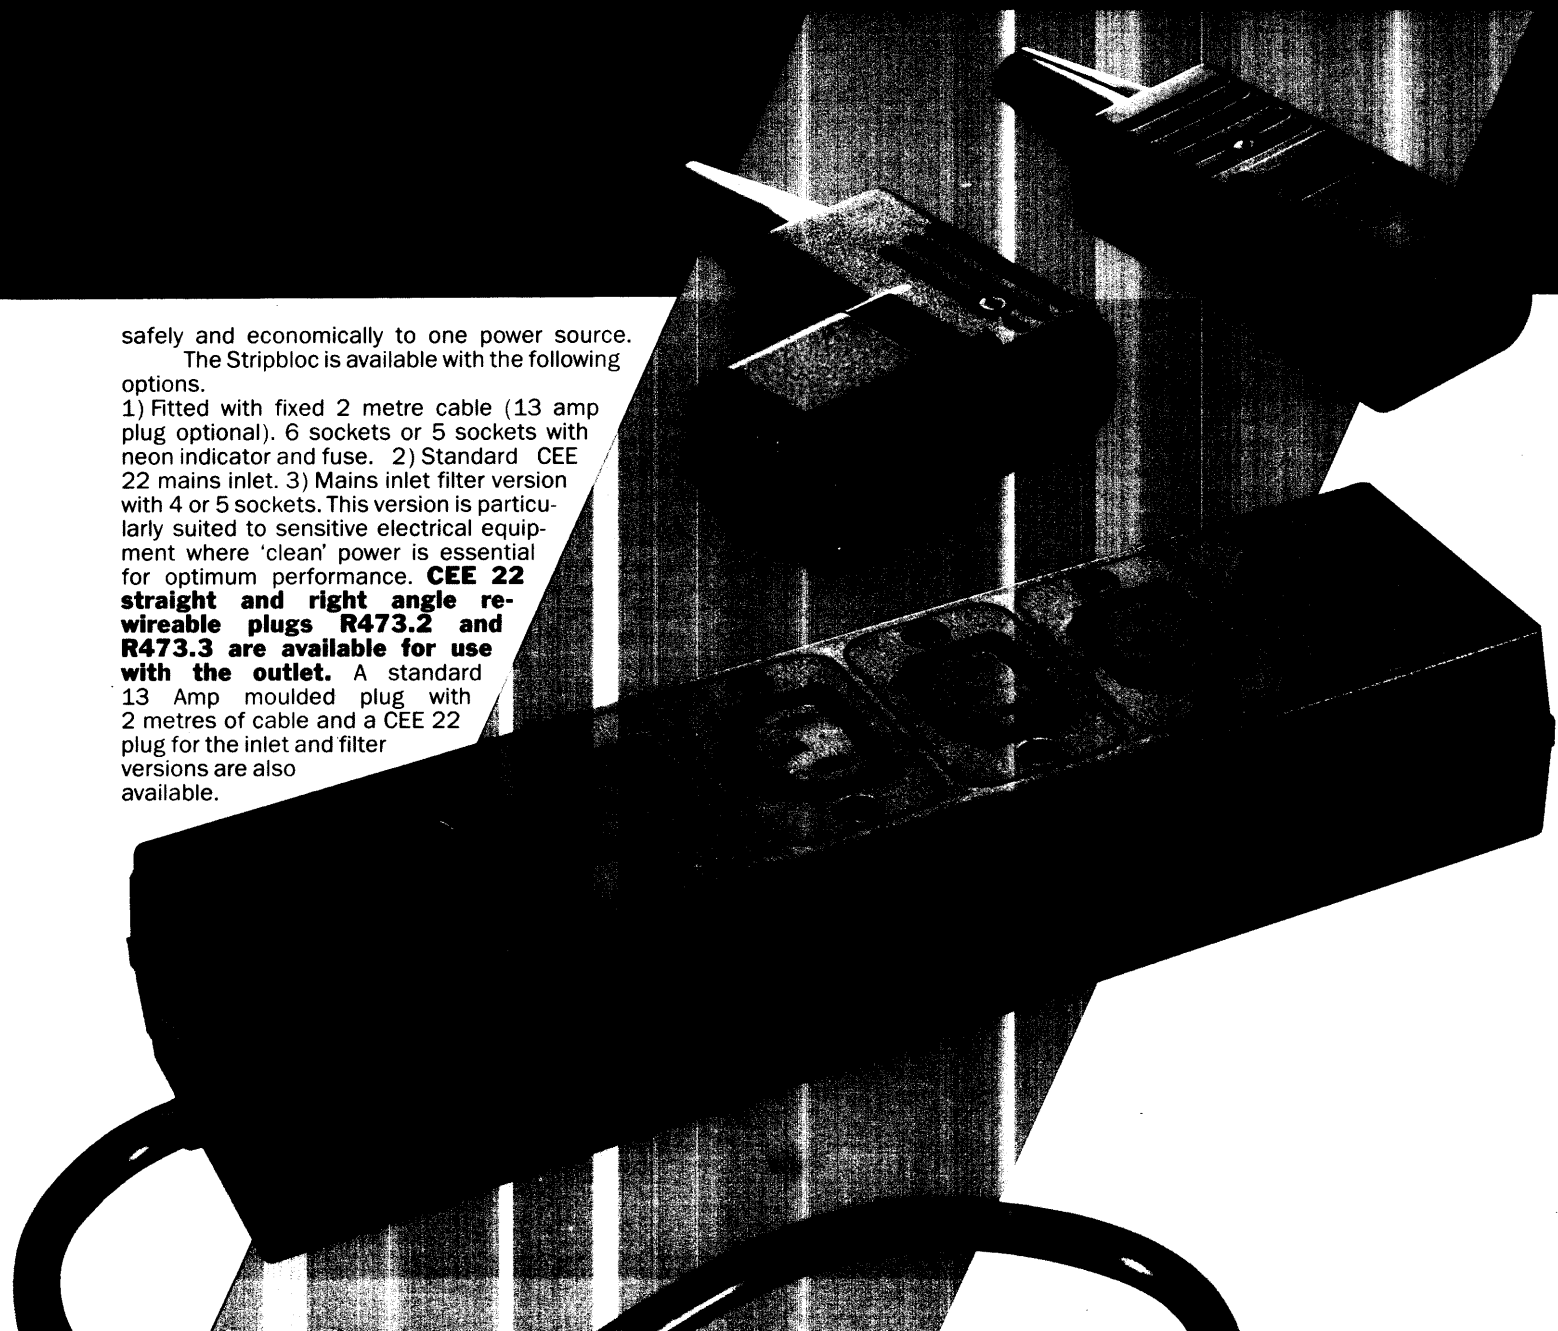

Ordering Code

R.475 X X 000


0	Shuttered
1	Unshuttered

0	4 Outlets only
1	4 Outlets, Neon & Fuse
2	5 Outlets only
3	5 Outlets, Neon & Fuse
4	6 Outlets only

Technical Specifications

MATERIAL:	Tough-grade ABS
VOLTAGE:	250V AC
CURRENT:	6 Amp Max.
FUSE:	5x20mm 6.3 Amp
OUTLET MATERIAL:	UL94V0

Overall Dimensions

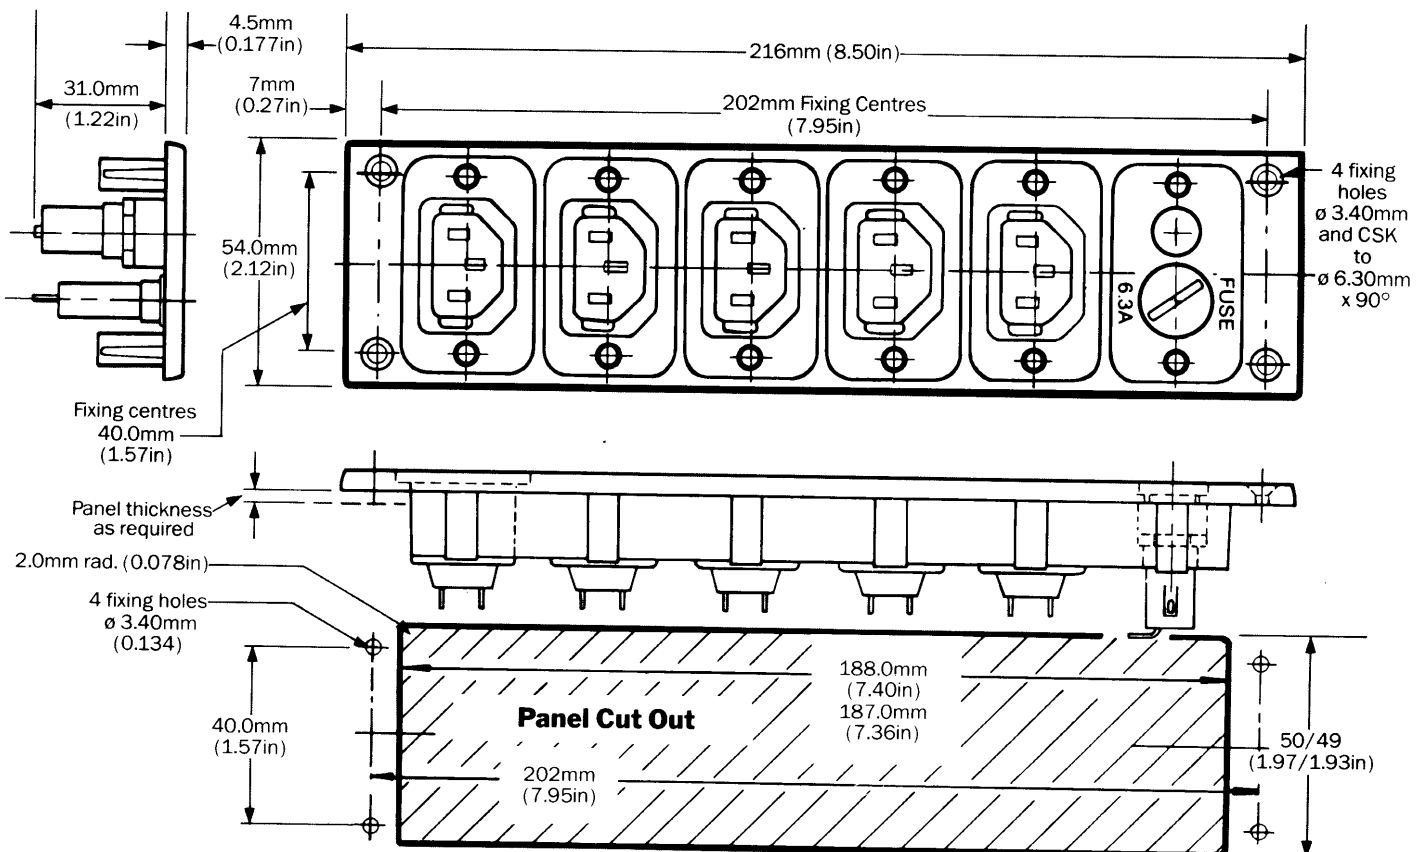

Ordering Code

R.474 X X X 00

0	Shuttered
1	Unshuttered

*0	4 Outlets only
1	4 Outlets, Neon & Fuse
*2	5 Outlets only
3	5 Outlets Neon & Fuse
*4	6 Outlets only


0	Appliance Inlet
1	Filter & Appliance Inlet
2	Cable
3	Cable & Plug
4	Filter & Cable
5	Filter, Cable & Plug

*Not available with Filter

Technical Specifications


MATERIAL:	Tough-grade ABS
VOLTAGE:	250V AC
CURRENT:	6 Amp Max.
FUSE:	5x20mm 6.3 Amp
OUTLET MATERIAL:	UL94VO

Overall Dimensions

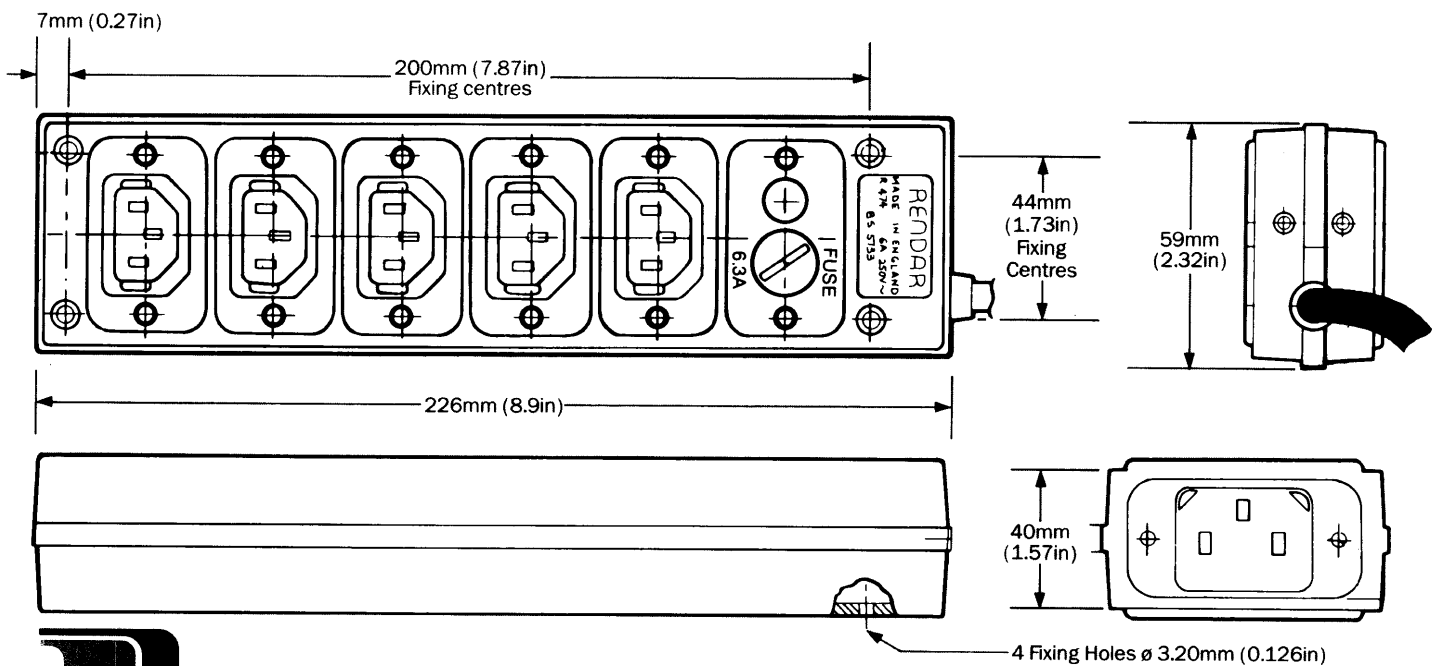

Rendar Limited
 Durban Road, South Bersted,
 Bognor Regis, West Sussex PO22 9RL
 Telephone: (0243) 825811
 Telex: 86120
 Fax: Gp III (0243) 861232

Distributor:

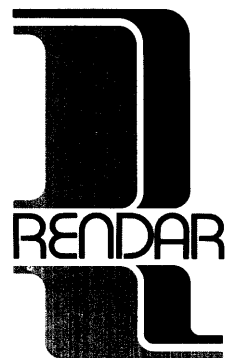

Panel Mounted

STRIPBLOC

Offering complete versatility and convenience this panel mounted version of the Stripbloc supplies up to 6 shuttered or non-shuttered outlet configurations from a single mains supply source.

This multi-power outlet moulded in rugged black ABS incorporates BEAB accepted components. The sockets meet the requirements of CEE 22 and are supplied as standard with 6.3mm fast-on tabs.

Optional features include neon indicator and integral fuse and a blanking plate to reduce the socket outlets to the number required.

CEE 22 straight and right angle rewirable plugs R473.2 and R473.3 are available for use with the outlet.

For full configuration availability refer to ordering codes.

