

Features:

- * Universal AC Input 90—264Vac
- * Low ripple & noise
- * No minimum load requirement
- * 100% burn in test
- * 1 year warranty
- * Safety: UL, cUL, GS, CB, CE, FCC



SPECIFICATION:

MODEL NO.	3A-161DB-05	3A-161DB-06	3A-161DB-07	3A-161DB-09	3A-161DB-12	3A-161DB-15	3A-161DB-18	3A-161DB-24
PART NO.	T3321ST	T3322ST	T3323ST	T3324ST	T3325ST	T3326ST	T3327ST	T3328ST
OUTPUT:								
Voltage	5VDC	6VDC	7VDC	9VDC	12VDC	15VDC	18VDC	24VDC
Current (Max)	2.6A	2.5A	2.14A	1.66A	1.25A	1.0A	0.83A	0.625A
Current (Min)	0A							
Line Regulation	+/-1%							
Load Regulation	+/-5%							
Over Voltage Protection	6 -8VDC O/P Shutdown	7.1-7.9VDC O/P Shutdown	8.5-9.4VDC O/P Shutdown	11.4-12.6VDC O/P Shutdown	15-18VDC O/P Shutdown	17.1-18.9VDC O/P Shutdown	19-21vVDC O/P Shutdown	25.6-28.3VDC O/P Shutdown
Short Circuit Protection	O/P Shutdown Auto Restart							
Ripple Voltage (L-F)	100mV P-P	150mV P-P	150mV p-p	150mV P-P	150mV P-P	150mV P-P	150mV P-P	150mV P-P
O/P Connector (1.8M Jack Lead)	2.1x5.5x12mm Centre +VE							
SAFETY:								
Hi Pot Test I/P-O/P	1.5KVAC or 2121VDC							
Insulation I/P-O/P	100Mohm							
TEMPERATURE:								
Operating	0' to 40°C							
Storage	-10°C to 75°C							
HUMIDITY:								
Operating	20 to 85%				Non Condensing			
Storage	-10 to 95%				Non Condensing			
INPUT:								
Voltage	90 to 264VAC							
Frequency	47 to 63Hz							
Current RMS (Max)	600mA							
Inrush Current	30/60A							
Leakage Current	3.5mA							
Efficiency (Min)	60% Min	60% Min	60% Min	60% Min	65% Min	65% Min	65% Min	65% Min
MTBF	50K Hours							
Safety	UL 60950-1,		CSA C22.2 No. 60959-1,		EN 60950-1,		IEC 60950-1	
Additional Safety	PSE	PSE	PSE	PSE	PSE	PSE		
EMI	FCC CFR 47 PART 15,				EN 55022,		EN 61000-3	
EMS	EN 50024 (EN 61204-3),				EN 61000-4			

1 ARKWRIGHT ROAD, READING, BERKS. RG2 0LU

TEL: 0118 9311199


FAX: 0118 9311145

E-Mail: info@stontronics.co.uk www.stontronics.co.uk

3A-161DB-XX 15 WATT SERIES

Dimensions:

Weight: 195g Approx.

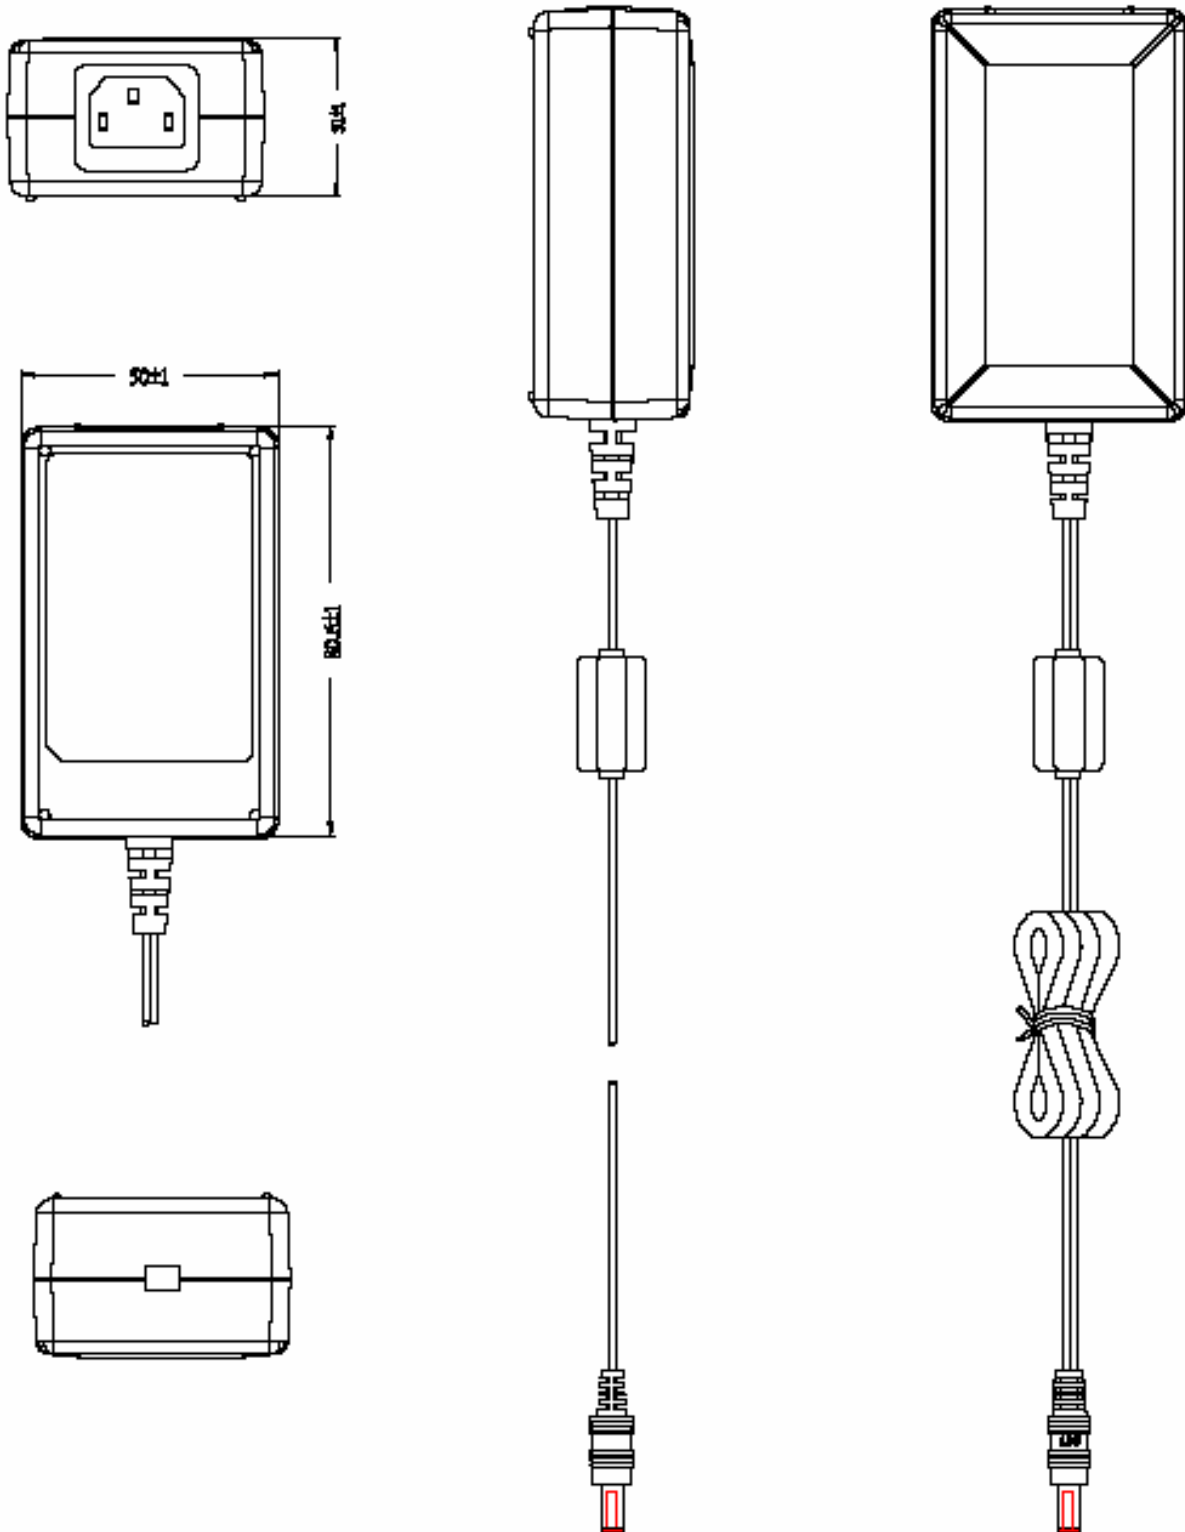

1 ARKWRIGHT ROAD, READING, BERKS. RG2 0LU

TEL: 0118 9311199

FAX: 0118 9311145

E-Mail: info@stontronics.co.uk www.stontronics.co.uk