


FP-CA-AU 630VDC Audio Capacitors Polypropylene Metallised

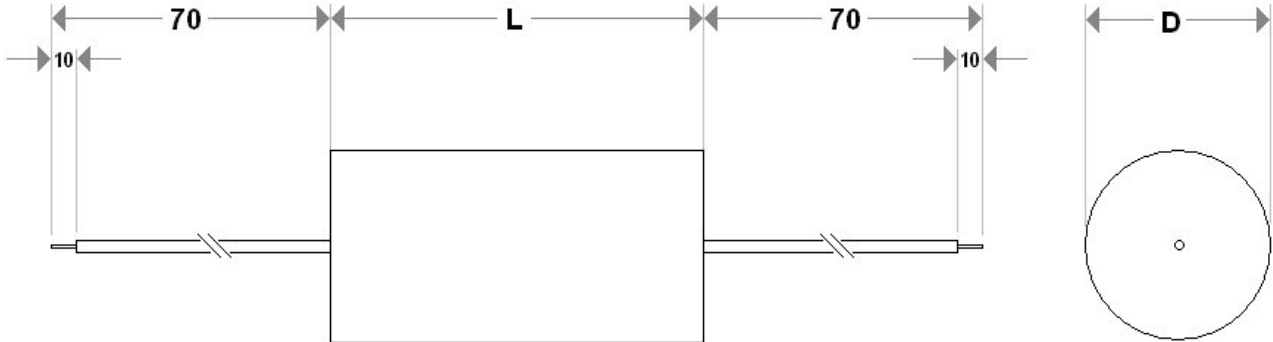

CAPACITANCE μF	D	L
1.0 – 2.2	25mm	50mm
3.3 - 4.7	30mm	50mm
6.8	30mm	70mm
10.0	35mm	70mm
12.0 - 16.0	40mm	70mm
20.0	45mm	70mm
30.0	45mm	100mm

AMPOHM Audio Capacitors are specially designed for high performance audio systems. The capacitors are hand wound and have their insulated copper leads hand soldered before being assembled in a plastic case and resin sealed. The resin filled end identifies the outer winding. This construction results in the capacitors having low ESR and low inductance and possessing high stability with respect to both temperature and frequency.

They are ideal for use in loudspeaker crossover networks and valve amplifiers where pure sound is at a premium.

Type: FP-CA-AU
Capacitance: 1.0 μF – 30.0 μF
Dissipation Factor: < 0.001 @ 1KHz
Tolerance: +/- 5%

Rated Voltage: 630V DC
Temperature Range: -40 to +85C

Marking:

	AMPOHM
	AUDIO CAPACITOR
	TYPE
	VALUE/VOLTAGE
	SPEC
	DATE CODE

Line on label denotes outer foil

Witness Innovation... Experience Technology



Registered Office: Ampohm Wound Products Ltd, Knaresborough Technology Park, Manse Lane, Knaresborough, North Yorkshire, HG5 8LF
 Tel: 01423 865641 • Fax: 01423 798246 • E-mail: sales@ampohm.co.uk • Website: www.ampohm.co.uk

Witness Innovation... Experience Technology



Registered Office: Ampohm Wound Products Ltd, Knaresborough Technology Park, Manse Lane, Knaresborough, North Yorkshire, HG5 8LF
Tel: 01423 865641 ▪ Fax: 01423 798246 ▪ E-mail: sales@ampohm.co.uk ▪ Website: www.ampohm.co.uk

Registered in England & Wales No: 5654904

VAT Registration: 874 7628 73

(a subsidiary of GSPK Circuits Ltd)