

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPECIFICATIONS:

RATINGS:

- 1. VOLTAGE: 250V
- 2. CURRENT: 15A


MATERIALS:

- 1. INSULATING MATERIAL: PA
- 2. FLAMMABILITY CLASS: UL94V-0
- 3. TEMPERATURE RANGE: -30 °C to +105 °C
- 4. CONTACT PIN: CuSn
- 5. COLOR: GREEN

SPC TYPE NO.	NO. OF POLES
1871	2
1872	3
1873	4
1874	5
1875	6
1876	7
1877	8
1878	9
1879	10
1880	12
1881	14
1882	16
1883	18
1884	20
1885	24

REVISIONS			DOC. NO. SPC-F005 + Effective 12/21/98 + DCP No. 480			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE
154	A	RELEASED	HYO	3/9/00	JJC	4/3/00

P = POLES

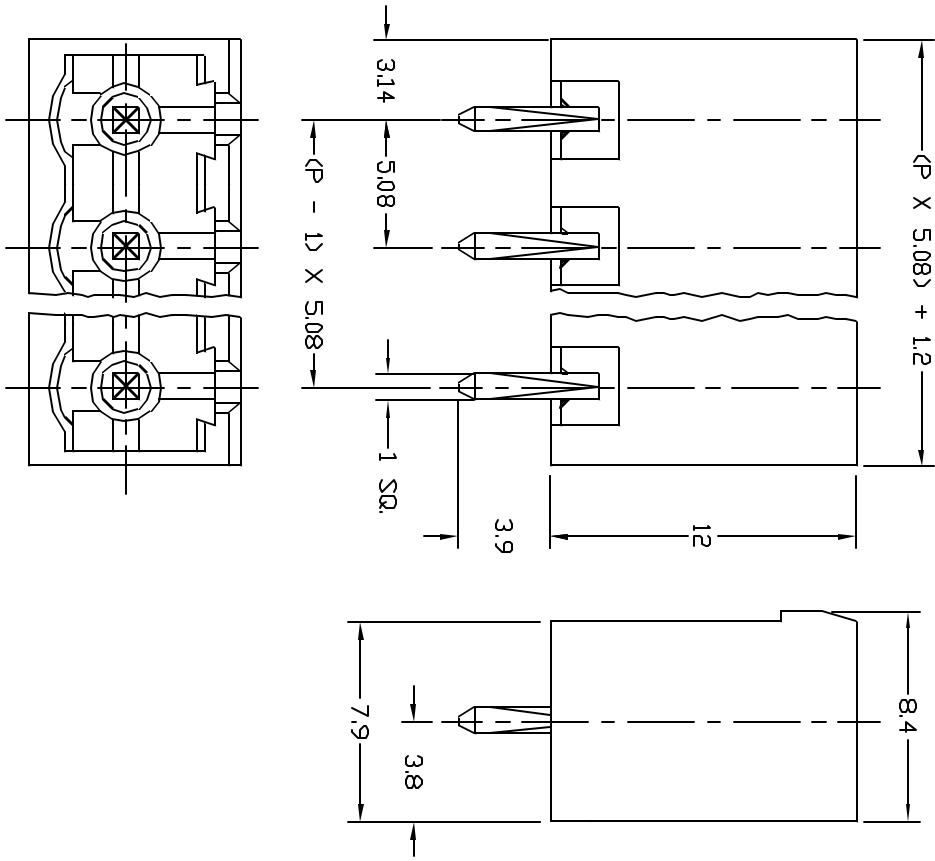

SPC TECHNOLOGY

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
HISHAM ODISH	3/9/00
CHECKED BY:	DATE:
JOHN COLE	4/3/00
APPROVED BY:	DATE:
DANIEL CAREY	4/28/00

DRAWING TITLE:			
VERTICAL HEADER, 5.08mm SPACING, CLOSED END			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-227	TA-227.DWG	A
SCALE:	NTS	U.O.M.: MILLIMETERS	SHEET: 1 OF 1