


SOLI ELECTRONICS (HUI-DONG) CO., LTD.

FARNELL PART NO: 9419110


DESCRIPTION: 1000 μ F/63V TG09-M 16*33

SOLI PART NO: HT102MIJB-1633(E)

单 位 : mm

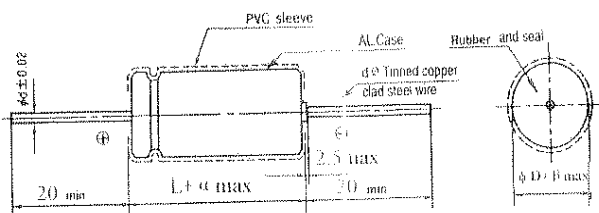

L	33
Φ D	16
Φ d	0.8
α	2.0
β	1.0

ITEM 项 目	CHARACTERISTIC 特 性									
Operating Temperature Range 使用温度范围	-40°C ~ +105°C									
Capacitance Tolerance 静电容量容许差	±20 % (120Hz, 20°C)									
Capacitance 规格容量	1000 μ F									
Rated Voltage 额定电压	63VDC									
Surge Voltage 突破电压	79 VDC									
Leakage Current (at 20°C) 漏电流	I ≤ 1260 μ A After 2 minutes									
Dissipation Factor (Tan δ at 120Hz, 20°C) 散逸因素	≤ 9 % (120Hz, 20°C)									
Ripple Current (rms 120Hz) 纹波电流	1223 mA 105°C									
Low Temperature Characteristics (at 120Hz) 低 温 特 性	<table border="1" style="margin: auto;"> <tr> <td colspan="2">Rated Voltage</td> <td style="text-align: center;">63V</td> </tr> <tr> <td rowspan="2">Impedance</td> <td>Z(-25°C)/Z(+20°C)</td> <td style="text-align: center;">3</td> </tr> <tr> <td>Ratio</td> <td>Z(-40°C)/Z(+20°C)</td> <td style="text-align: center;">6</td> </tr> </table>	Rated Voltage		63V	Impedance	Z(-25°C)/Z(+20°C)	3	Ratio	Z(-40°C)/Z(+20°C)	6
	Rated Voltage		63V							
	Impedance	Z(-25°C)/Z(+20°C)	3							
Ratio		Z(-40°C)/Z(+20°C)	6							
Load Life 负荷特性 After 1000hours application of rated voltage at 105°C, capacitors meet the characteristics requirements listed at right. 在额定电压105°C条件下,经过1000小时后,电容特性要求如右表	<table border="1" style="margin: auto;"> <tr> <td>Leakage Current 漏电流</td> <td>Initial specified value or less 等于或小于初始值</td> </tr> <tr> <td>Capacitance Change 容量变化</td> <td>Within ±20% of initial value 在初始值±20%以内</td> </tr> <tr> <td>Dissipation Factor 散逸因素</td> <td>Less than 200% of specified value 小于规格值200%</td> </tr> </table>	Leakage Current 漏电流	Initial specified value or less 等于或小于初始值	Capacitance Change 容量变化	Within ±20% of initial value 在初始值±20%以内	Dissipation Factor 散逸因素	Less than 200% of specified value 小于规格值200%			
	Leakage Current 漏电流	Initial specified value or less 等于或小于初始值								
	Capacitance Change 容量变化	Within ±20% of initial value 在初始值±20%以内								
Dissipation Factor 散逸因素	Less than 200% of specified value 小于规格值200%									
Shelf Life 放置特性	After leaving capacitors under no load at 105°C for 1000 hours and applying voltage they meet the specified value for load life characteristics listed above 将电容器放在无电压负荷105°C状况下,经过1000小时后,再加电压于电容器,其所测值应与有负荷测试判定标准相同。(同上表)									
Marking 标 示										
Standards 检验标准	Satisfies Characteristic W of JIS C 5141									
Publish Date	2005.08.20	Approved	Checked	Designed						
Revise Date		05-8-20	张正良	李文燕						
Edition NO.										