


HORIZONTAL PDU's

UK Style 13 amp 250v

Horizontal PDU's have many applications where multiple outlets are required:

- Underfloor / overhead distribution
- Shopfitting, exhibition & display work
- Office furniture & workshop
- Laboratory & workstation

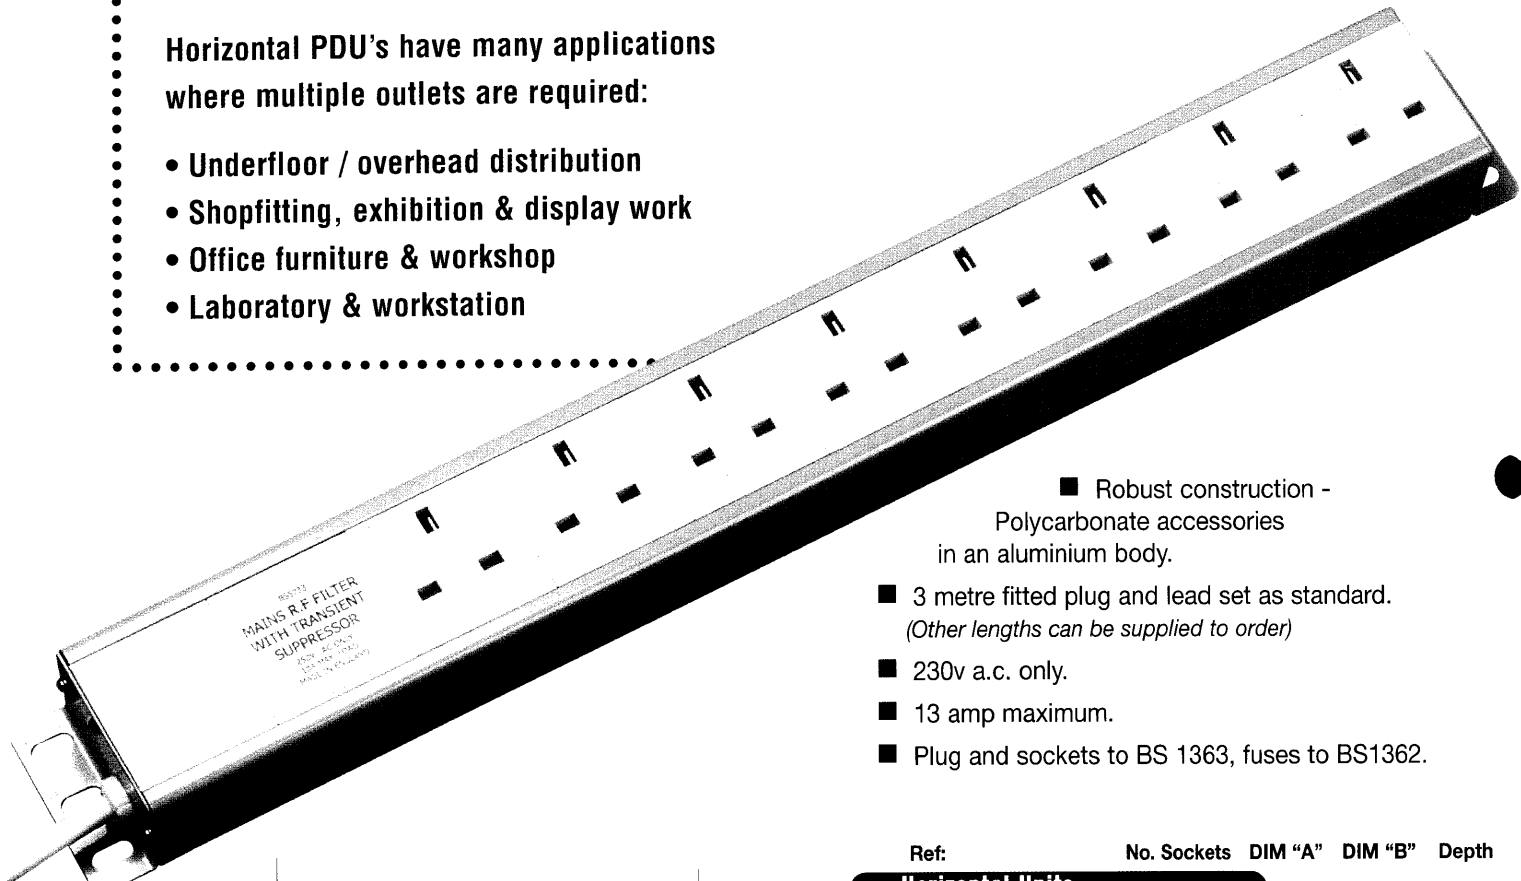


■ Robust construction - Polycarbonate accessories in an aluminium body.

■ 3 metre fitted plug and lead set as standard. (Other lengths can be supplied to order)

■ 230v a.c. only.

■ 13 amp maximum.

■ Plug and sockets to BS 1363, fuses to BS1362.

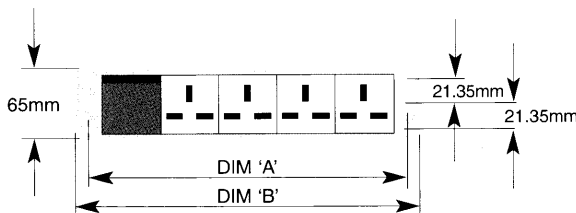

The table below applies to all Filter Modules throughout this brochure.

FILTER SPECIFICATION

Operating Voltage	220 - 250V AC
Current Rating	13 Amps
Typical RFI Attenuation (Common Mode)	56Db @ 1 Mhz, 68Db @ 10 Mhz
Surge Protection Modes	L - N, L - E, N - E
Maximum Clamping Voltage	710V (all modes) at 25A
Withstanding Surge Current	<2500A (category A & B mains) One Surge
Response Time	<25ns (nano-seconds)
Complies to	EN60950, EN133200

Ref: No. Sockets DIM "A" DIM "B" Depth

Horizontal Units

XH4	unswitched	4	269	293	46
XH5	unswitched	5	318	342	46
XH6	unswitched	6	370	393	46
XH8	unswitched	8	469	493	46
XH10	unswitched	10	566	590	46
XH12	unswitched	12	669	693	46
XH15	unswitched	15	819	843	46
XH20	unswitched	20	1067	1091	46
XH4S	switched	4	269	293	46
XH5S	switched	5	318	342	46
XH6S	switched	6	370	393	46
XH8S	switched	8	469	493	46
XH10S	switched	10	566	590	46
XH12S	switched	12	669	693	46
XH15S	switched	15	819	843	46
XH20S	switched	20	1067	1091	46

Horizontal Units with RCD

XH4	unswitched	4	369	393	46
XH5	unswitched	5	420	444	46
XH6	unswitched	6	469	493	46
XH8	unswitched	8	566	590	46
XH10	unswitched	10	669	693	46
XH12	unswitched	12	768	792	46

NB If additional options are chosen, Dimensions 'A' and 'B' will change accordingly.

Available options

S 16 AMP DOUBLE POLY-ILLUMINATED SWITCH	N NEON INDICATOR ONLY	Z 13 AMP UK SOCKET STAND-APART	F 10 AMP RFI / TRANSIENT SUPPRESSOR FILTER	G SURGE PROTECTION MODULE	D RCD	C RCBO	U 13 AMP FUSE MODULE	BK ALL BLACK	16 16 AMP PLUG	32 32 AMP PLUG
---	---------------------------------	--	--	-------------------------------------	-----------------	------------------	--------------------------------	------------------------	--------------------------	--------------------------

Example Order Code:-

XH4 S F BK

= 4 Way • Switch • Filter • Black

389 4277
4587
4599
4605

VERTICAL PDU'S ANGLED LEFT AND RIGHT




UK Style 13 amp 250v

Socket modules angled at 45° allow for cables to fall left or right, providing easy access to plugs and greater density of sockets per unit.

■ Robust construction - Polycarbonate accessories in an aluminium body.

■ 3 metre fitted plug and lead set as standard. (Other lengths can be supplied to order.)

■ Bodies Powder Coated BS 00A05 as standard.

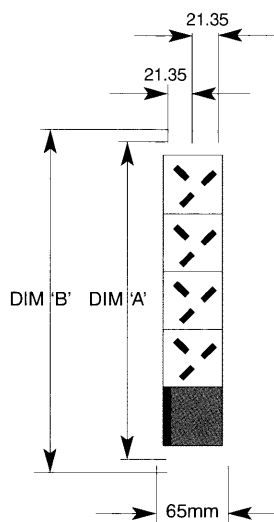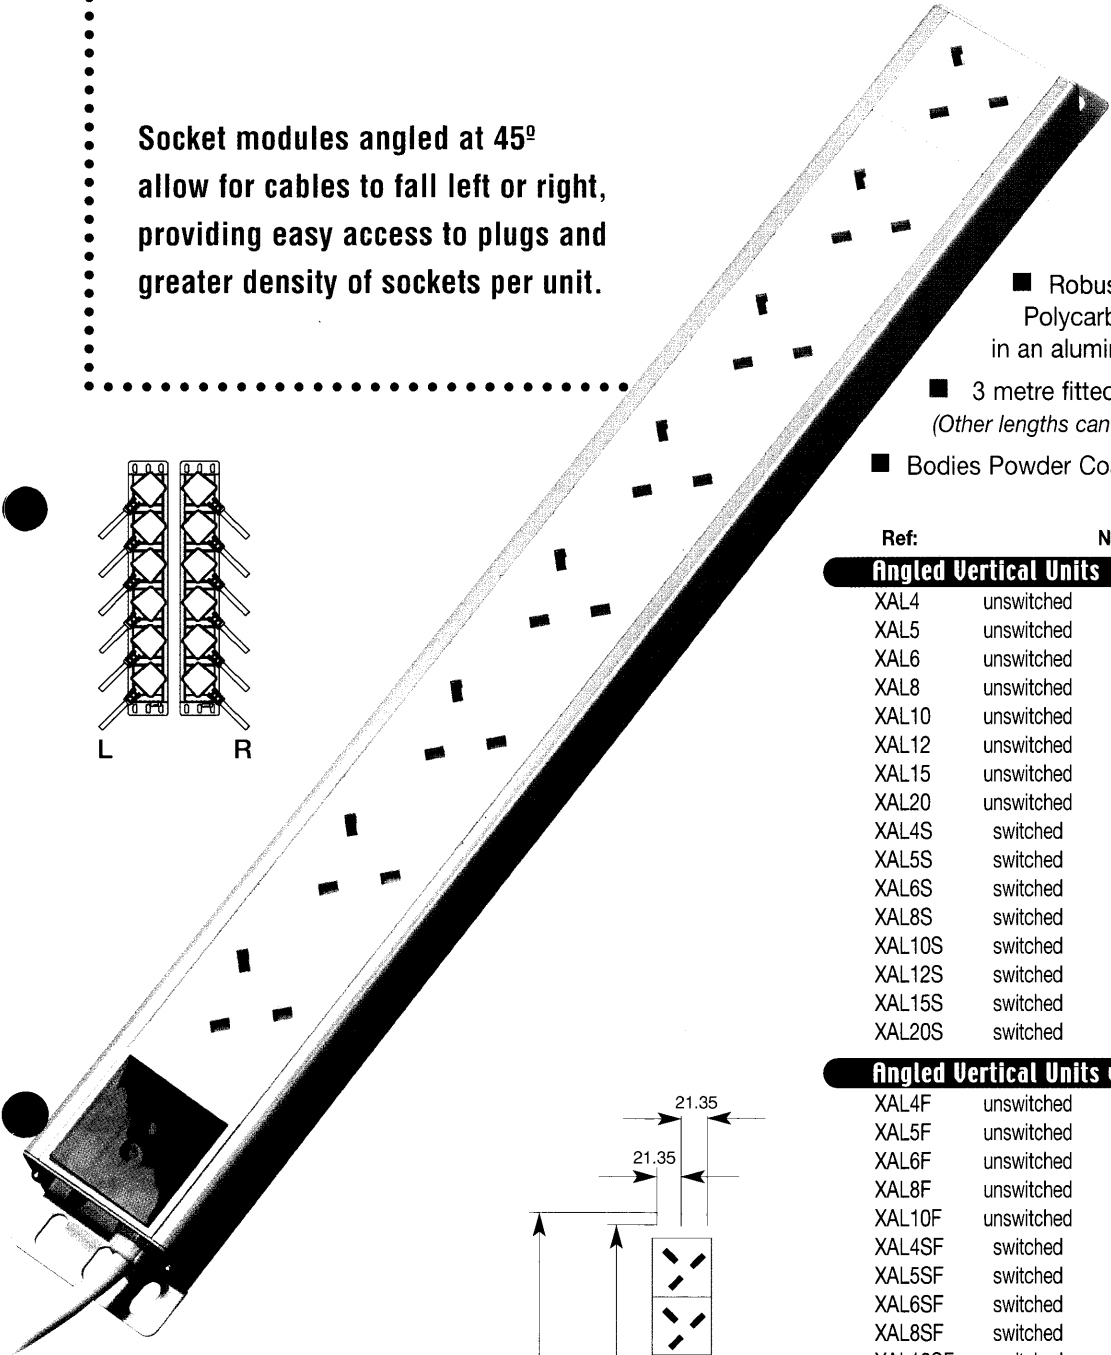

Ref: No. Sockets DIM "A" DIM "B" Depth

Angled Vertical Units

XAL4	unswitched	4	257	281	46
XAL5	unswitched	5	331	354	46
XAL6	unswitched	6	392	416	46
XAL8	unswitched	8	516	540	46
XAL10	unswitched	10	641	663	46
XAL12	unswitched	12	764	788	46
XAL15	unswitched	15	950	974	46
XAL20	unswitched	20	1260	1284	46
XAL4S	switched	4	318	342	46
XAL5S	switched	5	380	404	46
XAL6S	switched	6	442	466	46
XAL8S	switched	8	566	590	46
XAL10S	switched	10	690	713	46
XAL12S	switched	12	814	838	46
XAL15S	switched	15	999	1023	46
XAL20S	switched	20	1310	1334	46

Angled Vertical Units with Filter

XAL4F	unswitched	4	354	378	46
XAL5F	unswitched	5	416	440	46
XAL6F	unswitched	6	479	503	46
XAL8F	unswitched	8	607	631	46
XAL10F	unswitched	10	727	751	46
XAL4SF	switched	4	405	429	46
XAL5SF	switched	5	469	493	46
XAL6SF	switched	6	530	554	46
XAL8SF	switched	8	654	678	46
XAL10SF	switched	10	777	801	46

Angled Vertical Units with RCD

XAL4D	unswitched	4	405	429	46
XAL5D	unswitched	5	469	493	46
XAL6D	unswitched	6	530	554	46
XAL8D	unswitched	8	654	678	46
XAL10D	unswitched	10	778	801	46
XAL12D	unswitched	12	902	926	46

Replace 'L' with 'R' for Right Handed units. e.g. XAR6S

NB If additional options are chosen, Dimensions 'A' and 'B' will change accordingly.

Available options

- S** 16 AMP DOUBLE POLE UNLIMITED SWITCH
- N** NEON INDICATOR ONLY
- F** 10 MPR RES. TRANSPARENT SUPPRESSOR FILTER
- G** SURGE PROTECTION MODULE
- RCD** RCD
- RCBO** RCBO
- C** 13 AMP FUSE MODULE
- BK** ALL BLACK
- 16** 16 AMP PLUG
- 32** 32 AMP PLUG

Example Order Code:-

XAL4 S F BK

= 4 Way • Switch • Filter • Black