


Medical Open Frame

65 Watts PBM65 Series

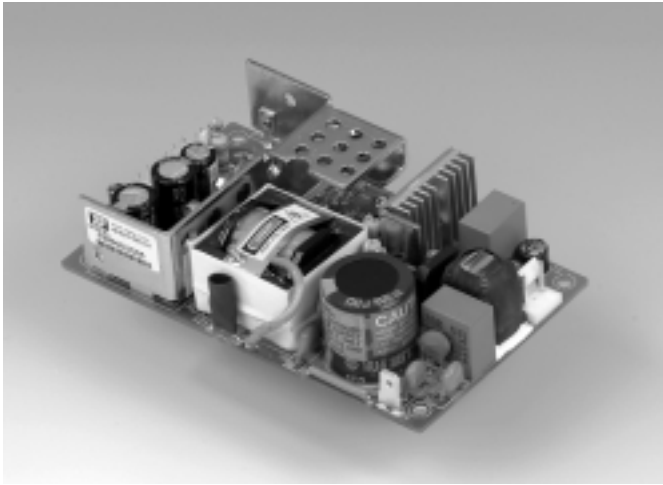

THE XPERTS IN POWER

- 4000 VAC Isolation
- Low Leakage Current
- Meets Class B, EN55011 Conducted
- Medical Safety Agency Approvals
- Both Line and Neutral Fused
- Fixed Switching Frequency

Specification

Input

- *Input Voltage* 85-264 VAC
- *Input Frequency* 47-63 Hz
- *Input Current* 1.6 A max at 115 VAC
1.0 A max at 230 VAC
- *Inrush Current* 17 A max at 115 VAC
40 A max at 230 VAC
- *Earth Leakage Current* 90 μ A max at 115 VAC, 60 Hz
150 μ A max at 230 VAC, 50 Hz

Output

- *Output Voltage* 5.1 to 28 VDC
- *Output Voltage Adjustment* $\pm 5\%$
- *Output Power* 65 Watts
- *Minimum Load* No minimum load required
- *Line Regulation* $\pm 0.5\%$ max at full load
- *Load Regulation* $\pm 2\%$ typical
- *Ripple and Noise* $\pm 1\%$ pk-pk max (See Note 2)
- *Transient Response* 4% maximum deviation, 500 μ s recovery time to within 1% for a 25% load change
- *Temperature Coefficient* $\pm 0.04\%/^{\circ}$ C
- *Hold Up Time* 10 ms minimum at 110 VAC
- *Overvoltage Protection* 112-132% with auto recovery
- *Overcurrent Protection* 125-200% with auto recovery
- *Short Circuit Protection* Trip & restart with auto recovery
- *Remote Sense* Compensates for up to 0.5 V drop

General

- *Efficiency* 66% minimum for 5 V models
75% minimum for all others
- *MTBF* 400,000 hrs min MIL-HDBK-217F
- *Switching Frequency* 42 kHz ± 5 kHz
- *Isolation Voltage* 4000 VAC Input to Output
1500 VAC Input to Output
500 VAC Output to Ground
- *Size* 5.0 x 3.0 x 1.2"
127.00 x 76.20 x 30.48 mm
- *Weight* 330 g approx (PCB format)

Environmental

- *Operating Temperature* 0 $^{\circ}$ C to +70 $^{\circ}$ C
Derate linearly from 100% load at +50 $^{\circ}$ C to 50% load at +70 $^{\circ}$ C
- *Cooling* Convection cooled
- *Relative Humidity* 5-95% non-condensing
- *Storage Temperature* -40 $^{\circ}$ C to +85 $^{\circ}$ C

EMC & Safety


- *Safety Approvals* UL2601-1, CSA C22.2 No 601.1, EN60601-1 CE Mark (LVD)
- *EMI/EMC* EN55011 (CISPR11) Class B and FCC Part 18 Level B radiated & conducted
- *ESD* EN61000-4-2, Level 3 air, Level 2 contact, Perf Criteria A
- *Radiated Immunity* EN61000-4-3, 3 V/m, Perf Criteria A
- *EFT/Burst* EN61000-4-4, Level 3, Perf Criteria A
- *Surge* EN61000-4-5, Level 3, Perf Criteria A

OUTPUT VOLTAGE & CURRENT RATINGS				PBM65
Maximum Output Power	Output Voltage	Output Current	Total Regulation ⁽¹⁾	Model Number
51 W	5.1 VDC	10.0 A	3%	PBM65US05
65 W	12.0 VDC	5.5 A	2%	PBM65US12
65 W	15.0 VDC	4.4 A	2%	PBM65US15
65 W	18.0 VDC	3.7 A	2%	PBM65US18
65 W	24.0 VDC	2.8 A	2%	PBM65US24
65 W	28.0 VDC	2.4 A	2%	PBM65US28

Notes

- Total regulation includes line and load regulation and set point accuracy.
- Ripple and noise measured with 20 MHz bandwidth with 10 μ F tantalum capacitor in parallel with a 0.1 μ F ceramic capacitor.

Mechanical Details

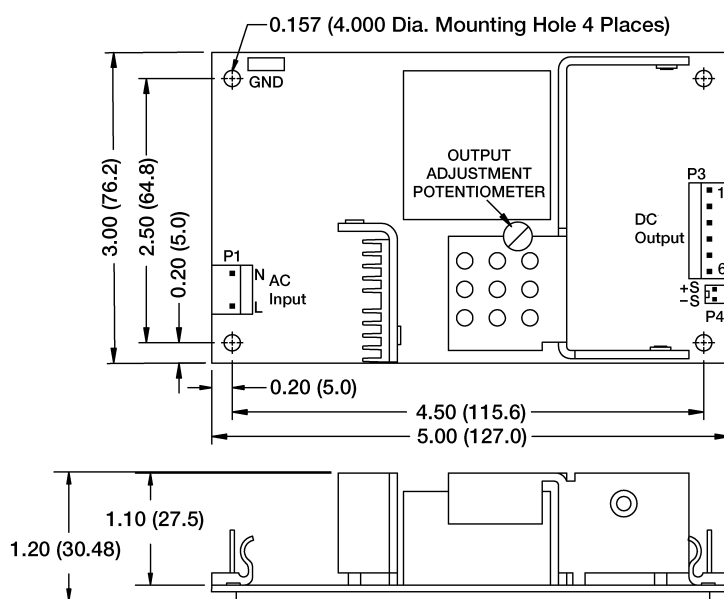

P3 PIN CONNECTIONS	
Pin	Function
1	Output 1
2	Output 1
3	Output 1
4	Return
5	Return
6	Return

NOTES:

- Dimensions shown in inches (mm).
- Tolerance 0.02 (0.5) maximum.
- Input connector mates with molex housing 09-50-3031 and Molex 2878 series crimp terminal.
- Output connector mates with molex housing 09-50-3061 and Molex 2878 series crimp terminal.
- P4 is for sense connector mates with molex housing 22-01-1023 and molex 40445 series crimp terminal.
- Loom kits with 300 mm wire available, order part number PBM65 LOOM.
- For mating connectors only, order part number PBM65 CONKNT.
- Covers available, order part number PBM65 COVER.
- Weight: 330 g (PCB format).