

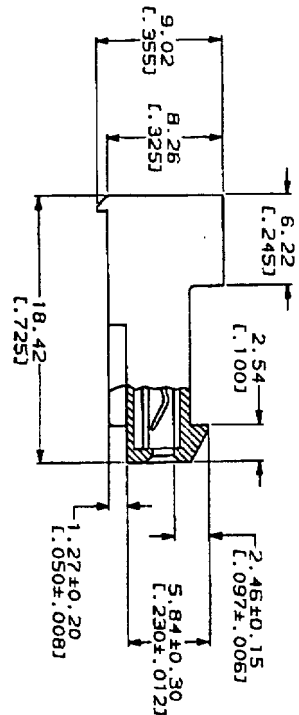


DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNQUALIFIED. RELEASED FOR PUBLICATION
 BY AMP CORPORATION. ALL INFORMATION, RIGHTS RESERVED. © COPYRIGHT 1987



588 817
 829 830
 842 854
 866 878
 880



- △ MATERIAL, CONNECTOR - NYLON UL94V-2 (RED), CONTACTS - 0.301, 0.125 THICK COPPER ALLOY (BRIGHT-TIN 0.00203 (L.000080) MIN THK)
- 2. CONTACTS ACCEPT 22 AWG WIRE WITH 2.41 (L.095) MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 1.14±0.03 (L.045 ±.001) SQUARE POST AND REMAIN LOCKED IN POSITION.
- △ IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE, CLOSED END WITH LOCKING RAMP.

DO NOT SCALE PRINT. DIMENSIONS IN INCHES TOLERANCES UNLESS SPECIFIED: 1. FRACTIONS ON .1 2. DECIMALS ON .005 3. DECIMALS ON .010 (L.005) ANGLES ± .5° PARENTAL ± .1°	OR E. LEVIS 2-12-91	OR R. SILING 2-12-91	OR D. CLARK 2-19-91	NAME AMP AMP Incorporated Harrisburg, PA 17105-2608
FINISH △	OR 108-1051	OR 114-1020	OR 108-1051	MTA 156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD
SCALE 4:1	SIZE 00779	DRAWING NO 640428	PRODUCT SPEC 108-1051	
WEIGHT	APPLICATION SPEC 114-1020		APPD 108-1051	

DIM A	NO OF CIRCUITS	PART NO
95.10 (3.744)	24	2-640428-4
91.19 (3.588)	23	2-640428-3
87.17 (3.432)	22	2-640428-2
83.21 (3.276)	21	2-640428-1
79.25 (3.120)	20	2-640428-0
75.29 (2.964)	19	1-640428-9
71.32 (2.808)	18	1-640428-8
67.36 (2.652)	17	1-640428-7
63.40 (2.496)	16	1-640428-6
59.44 (2.340)	15	1-640428-5
55.47 (2.184)	14	1-640428-4
51.51 (2.028)	13	1-640428-3
47.55 (1.872)	12	1-640428-2
43.59 (1.716)	11	1-640428-1
39.62 (1.560)	10	1-640428-0
35.66 (1.404)	9	640428-9
31.70 (1.248)	8	640428-8
27.74 (1.092)	7	640428-7
23.77 (L.936)	6	640428-6
19.81 (L.780)	5	640428-5
15.85 (L.624)	4	640428-4
11.89 (L.468)	3	640428-3
7.92 (L.312)	2	640428-2

CUSTOMER DRAWING

REV 15 LUNS	DATE	APPD
DESCRIPTION	1-29-87	NS
REACT 2--1, 2--2 & 2--3		
PER PR CH 92-2		
CM 54		