

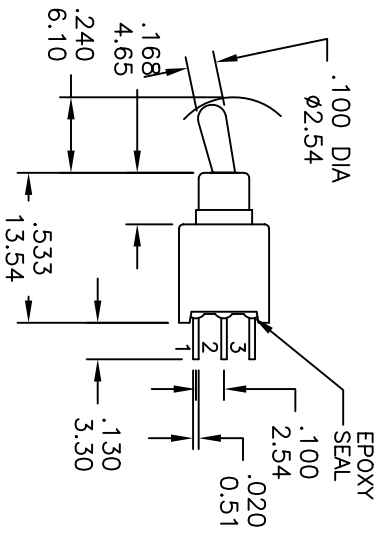


P.C. MOUNTING

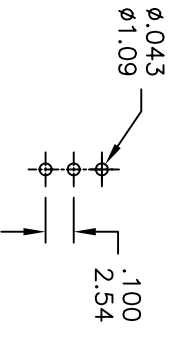

Model No.	POS.1	POS.2	POS.3
ZAS3	ON	OFF	ON
Term. Comm.	2-3	OPEN	2-1
SCHEMATIC		OPEN	

SWITCH FUNCTION

SPECIFICATIONS

ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 20m Ω max. Initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000M Ω min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30° C to 85° C.

MATERIALS

CASE & BUSHING - Glass filled nylon 6/6, retardant, heat stabilizer(UL94V-0)
ACTUATOR - Brass, chrome plated. Internal O-ring seal, standard for all actuators.
SWITCH SUPPORT - Brass, tin plated.
TERMINALS/CONTACT - Silver or gold plated copper.

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
 Q : 1Amp @250VAC
 3Amps @120 VAC or 28 VDC

符號	原尺寸	修改後尺寸	變更日期
1	(A)		
2	(B)		
3	(C)		
4	(D)		
5	(E)		

SCALE (比例) :	3 : 2
TOLERANCE (公差) :	0.00 mm ± 0.25mm
ANGULAR :	± 2.54 mm
FILE NAME :	2ASPP0047

TITLE 圖名	Sealed Sub - Miniature Toggle Switches		
DWG NO. 圖號	2AS3T2A1M2RE		
REV. 版本	A	DATA 日期	OCT - 25 - 2002
CHECKED BY 審核	Jack	DRAWN BY 製圖	BLUE
SCALE (比例) :	3 : 2	UNIT 單位	inch
TOLERANCE (公差) :	0.00 mm ± 0.25mm	SHEET 張數	1 of 1
ANGULAR :	± 2.54 mm		
FILE NAME :	2ASPP0047		

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO.,LTD.