

Functions	Series 531	Series 532
Depth gauge	●	●

Caliper

- With depth gauge.
- Caliper and slide made of hardened, corrosion-free steel.
- Measuring surface and nonius satin chrome finished.
- Raised sliding surfaces.

Specifications

Accuracy: DIN 862
Delivered in soft case


Optional accessories

Extension for depth measurement see page 148

Metri ISO-Gew			
Nenn- maß ext. φ mm	Stg. Pass- maß mm	Kern- maß int. φ mm	Bohr- maß h22h9 φ mm
3	3,5	2,46	2,5
4	4,7	2,92	3,5
5	5,8	3,13	4,2
6	7	3,57	5
8	1,25	5,35	6,5
10	1,5	6,38	8,5
12	1,75	7,61	10,2
16	2	10,64	14
20	2,5	11,29	17,4
Whitworth			
φ in.	GB (in)	Ø mm	φ mm
1/4	20	4,72	5,0
5/16	18	6,13	6,4
3/8	16	7,49	7,7
1/2	12	9,99	10,25
5/8	11	12,92	13,25
3/4	10	15,8	16,25
7/8	9	18,61	19
"	8	21,34	21,75
		109955	


With Thread table
No. 101995 D
on the back side,
531-122 only

Series 531 with moment adjustment

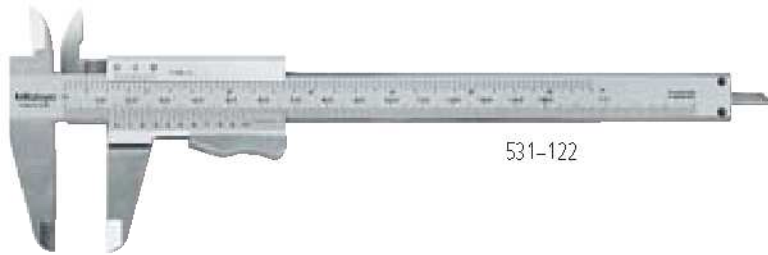


531-122

Measuring range mm	No.	Jaw length mm	Nonius		L mm	a mm	b mm	c mm	d mm	Mass g
			top	bottom						
0-150	531-122	40	1/128"	0,05 mm	231	40	21,0	16,5	16	142
0-200	531-108	50	1/128"	0,05 mm	288	50	24,5	20,0	16	175
0-300	531-109	64	1/128"	0,05 mm	403	64	27,5	22,0	20	350



Easy reading due to nonius
scale inclined by 14 degrees

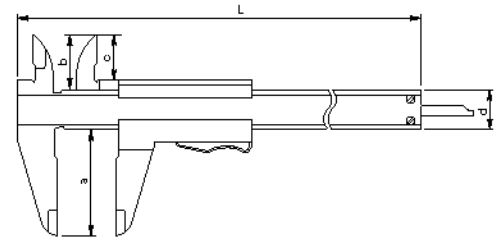


Series 532 with fine adjustment



532-119

Measuring range mm	No.	Jaw length mm	Nonius		L mm	a mm	b mm	c mm	d mm	Mass g
			top	bottom						
0-130	532-119	40	1/1000"	0,02 mm	231	40	21,0	16,5	16	165
0-180	532-120	50	1/1000"	0,02 mm	288	50	24,5	20,0	16	202
0-280	532-121	64	1/1000"	0,02 mm	403	64	27,5	22,0	20	395



Easy reading due to nonius
scale inclined by 14 degrees

