



# Series 3

3 Amp • 120, 240 Vac • AC Output



- Compact for High Density PCB Mount
- Small Footprint
- UL, CSA, VDE Approved

work (S3 types), Series 3 is an ideal replacement for power reed relays in microprocessor or computer-based logic level systems. Designed for long, reliable service in a multitude of demanding industrial environments.

These solid state relays combine small size and high ratings in a PC-board-mounted SPST-NO design. Available with (S30 types) or without snubber net-

Manufactured in Crydom's ISO 9002 Certified facility for optimum product performance and reliability.

## CURRENT DERATING CURVE

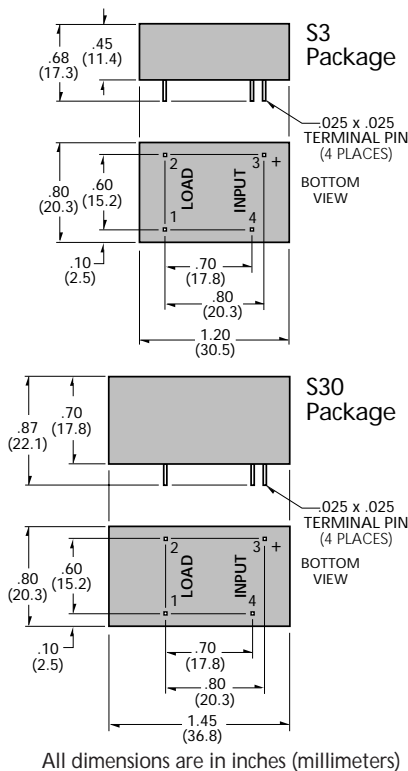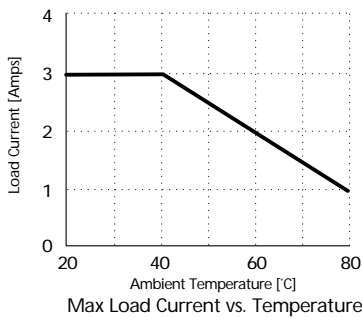

MODEL NO.	S312	S3012A	S322	S3022A
<b>INPUT SPECIFICATIONS ①</b>				
Control Voltage Range	3.5-8 Vdc		3.5-8 Vdc	
Nominal Input Impedance	200 Ohm		200 Ohm	
Typical Input Current @ 5 Vdc	20 mAdc		20 mAdc	
Must Turn On Voltage	3.5 Vdc		3.5 Vdc	
Must Turn Off Voltage	1.0 Vdc		1.0 Vdc	
<b>OUTPUT SPECIFICATIONS ①</b>				
Operating Voltage Range (47-63 Hz)	20-140 Vrms		40-280 Vrms	
Load Current Range (Arms)	.15-3.0	.15-3.0	.15-3.0	.15-3.0
Transient Over-Voltage	600 Vpk		600 Vpk	
Max. Surge Current, (16.6ms)	55 Apk		55 Apk	
Min. Off-State dv/dt @ Max. Rated Voltage ③	200 V/μsec		200 V/μsec	
Max. Off-State Leakage @ Rated Voltage	1.0 mA	4.0 mA	1.0 mA	4.0 mA
Max. On-State Voltage Drop @ Rated Current	1.5 Vpk		1.5 Vpk	
Max. Turn-On Time	1/2 cycle		1/2 cycle	
Max. Turn-Off Time	1/2 cycle		1/2 cycle	
Power Factor (Min.) With Max. Load	0.5		0.5	
<b>GENERAL SPECIFICATIONS</b>				
Dielectric Strength ②	4000 Vrms			
Insulation Resistance (Min.) @ 500 Vdc ②	10 <sup>9</sup> Ohm			
Max. Capacitance	8.0 pF			
Ambient Operating Temperature Range	-30 to 80°C			
Ambient Storage Temperature Range	-30 to 125°C			
<b>MECHANICAL SPECIFICATIONS</b>				
Weight: (typical)	0.6 oz. (0.8 g)			
Encapsulation:	Thermally Conductive Epoxy			

## APPROVALS

UL E116949  
CSA LR81689  
VDE 10114 UG



©1998 CRYDOM CORP, Specifications subject to change without notice.

## GENERAL NOTES

- ① All parameters at 25°C unless otherwise specified.
- ② Dielectric and insulation resistance are measured between input and output.
- ③ Off-State dv/dt test method per EIA/NARM standard RS-443.

For recommended applications and more information contact:

USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280  
Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com  
web site: <http://www.crydom.com> FastFax Product Information: (888) 267-9191  
UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condor Close,  
Woolbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SU  
GERMANY: (49) (0)6874 182580 • fax (49)(0)6874 182585 Crydom GmbH,  
Gewerbegebiet im Schachen, D-66687 Nunkirchen, Germany • e-mail: [vertrieb@crydom.com](mailto:vertrieb@crydom.com)

