


Maximum working voltage 50 V a.c.

Colour	Order Code
Black	444-0100
Red	444-0500

Compact Probe

This compact probe is ideally suited for PCB use




Maximum working voltage of 50 V a.c.

Colour	Order Code
Black	539-0100
Red	539-0500

Miniature Probe

Ideally suited to high density PCBs including integrated circuit pins and similar items




Maximum working voltage 50 V a.c. Has a lead wire solder connection.

Colour	Order Code
Black	575-0100
Blue	575-0200
Green	575-0400
Red	575-0500
Yellow	575-0700

Test Leads


A range of flexible cable test leads ready assembled with each end terminated with a colour co-ordinated stackable 4mm plug.

Maximum working voltage 50 V a.c.
Leads manufactured from extra flexible cable.

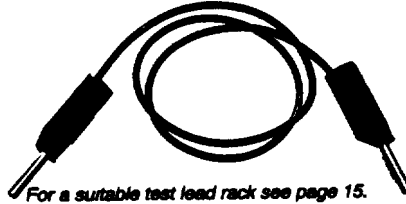

For a suitable test lead rack see page 15.

Length	Colour	Order Code
.25m	Black Lead	545-0100
.25m	Blue Lead	545-0200
.25m	Green Lead	545-0400
.25m	Red Lead	545-0500
.25m	Yellow Lead	545-0700
.5m	Black Lead	546-0100
.5m	Blue Lead	546-0200
.5m	Green Lead	546-0400
.5m	Red Lead	546-0500
.5m	Yellow Lead	546-0700
.75m	Black Lead	547-0100
.75m	Blue Lead	547-0200
.75m	Green Lead	547-0400
.75m	Red Lead	547-0500
.75m	Yellow Lead	547-0700
1m	Black Lead	548-0100
1m	Blue Lead	548-0200
1m	Green Lead	548-0400
1m	Red Lead	548-0500
1m	Yellow Lead	548-0700

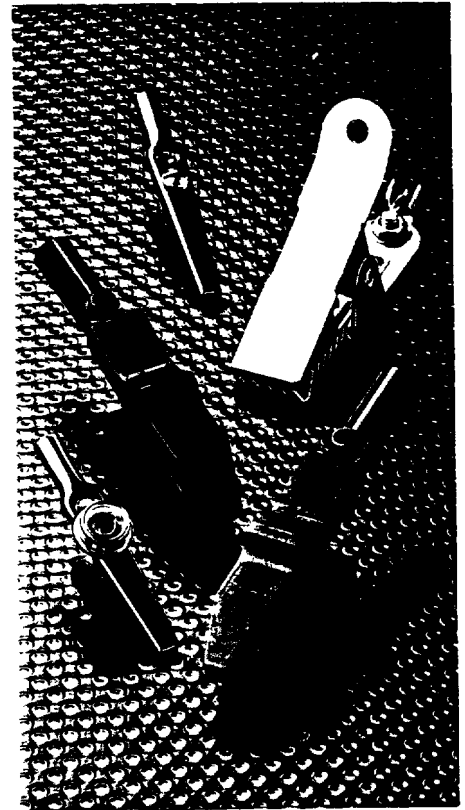

Earth stud on this product is a 10mm connection. Also has 4mm plug entry.


Type	Order Code
Anti-static Crocodile Clip	305-0000

Crocodile Clips

Superior quality crocodile clip with nickel plate finish.

Standard Crocodile Clip

This product has been engineered to allow fine wires to be held securely by an undercut turned brass clamping screw. There is a rear entry that will accept 4mm plugs. Produced from steel nickel plated. Rated at 5 A.




Type	Order Code
Crocodile Clip	303-0000
Insulating Cover Black	302-0100
Insulating Cover Red	302-0500

See page 14


Anti Static Crocodile Clip

Enables operators to quickly and effectively ground surfaces and components that require the protection of anti-static environments



Large Insulated Crocodile Clip


Shrouded jaws make this product ideally suitable for instrumentation usage, it accepts 4mm plug or wire clamped by an integral screw. The acetal moulding is available in two colours, red or black and the internal metalwork is nickel plated steel. Rated at 10 A.



Colour	Order Code
Black	307-0100
Red	307-0500


Large Crocodile Clip

Ideally suited for use as a battery and terminal clip. Manufactured to a high tolerance, whilst offering exceptionally good gripping. The product is bright nickel plated over steel. Rated at 20 A.



Type	Order Code
Crocodile Clip	304-0000
Insulating Cover Black	310-0100
Insulating Cover Red	310-0500

See page 14

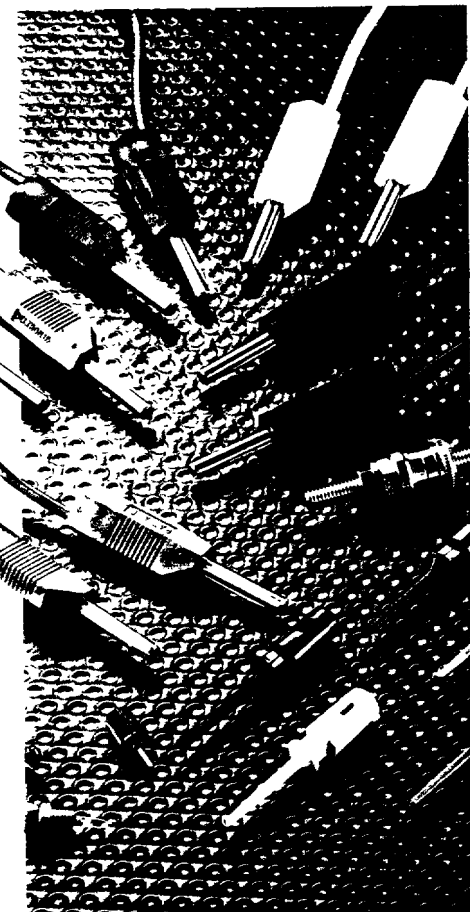

147-003