

AMM120 Series



- Energy Star & CEC 2008 Compliant
- Worldwide Medical Approvals
- Output Voltages from 12 V to 48 V
- Small Size/High Power Density
- Class I and Class II Versions
- Operating Temperature up to +60 °C
- High Efficiency

Specification

Input

Input Voltage	• 90-264 VAC
Input Frequency	• 47-63 Hz
Input Current	• 1.6 A rms at 115 VAC, 0.8 A rms at 230 VAC
Inrush Current	• 60 A at 115 VAC, 120 A at 230 VAC, cold start +25 °C
Power Factor	• 0.98 typical
Earth Leakage Current (Class I Versions)	• 90 μ A max at 115 VAC/60 Hz, 150 μ A max at 230 VAC/50 Hz
Input Protection	• Internal 3 A fuse in live and neutral lines

Output

Output Voltage	• 12 to 48 VDC
Output Voltage Trim	• Not user-adjustable
Initial Set Accuracy	• \pm 2 %
Minimum Load	• No minimum load required
Start Up Delay	• 2 s max at 115 VAC
Start Up Rise Time	• <80 ms at 115 VAC
Hold Up Time	• 15 ms minimum at full load & 115 VAC
Line Regulation	• 0.5% maximum
Load Regulation	• Total regulation $<\pm$ 5%
Transient Response	• 4% max. deviation, recovery to within 1% in 500 μ s for a 25% load change
Ripple & Noise	• 2% max pk-pk (see note 1)
Overvoltage Protection	• 110-140% Vnom, recycle input to reset
Overtemperature Protection	• Unit shuts down, recycle input to reset
Overload Protection	• 110-150%, auto recovery
Short Circuit Protection	• Trip and restart (Hiccup mode)
Temperature Coefficient	• 0.04%/°C

General

Efficiency	• 85% typical
Isolation	• 4000 VAC Input to Output 1500 VAC Input to Ground (Class I only) 500 VAC Output to Ground (Class I only)
Switching Frequency	• 40-120 kHz variable
Power Density	• 3.7 W/In ³
MTBF	• >175 kHrs per MIL-HDBK-217F

Environmental

Operating Temperature	• 0 °C to +60 °C, derate from 100% power at +40 °C to 50% power at +60 °C
Cooling	• Convection-cooled
Operating Humidity	• 10-95% RH, non-condensing
Storage Temperature	• -20 °C to +80 °C
Operating Altitude	• 3000 m
Shock	• 30 g, 10 ms on 3 axes
Vibration	• 5-100 Hz, 2.31 m/s ² , 20 mins, 3 axes

EMC & Safety

Emissions	• EN55011/FCC/VCCI, Class B conducted EN55011/FCC/VCCI, Class B radiated
Harmonic Currents	• EN61000-3-2
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, level 3 Perf Criteria A
Radiated Immunity	• EN61000-4-3, level 2 Perf Criteria A
EFT/Burst	• EN61000-4-4, level 3 Perf Criteria A
Surge	• EN61000-4-5, level 3 Perf Criteria A
Conducted Immunity	• EN61000-4-6, 3 V Perf Criteria A
Magnetic Field	• EN61000-4-8, 3 A/m Perf Criteria A
Dips & Interruptions	• EN61000-4-11, 70% U _r for 10 ms, 40% U _r for 100 ms, <5% U _r for 5000 ms Perf Criteria A, B, B (Perf Criteria A, A, B with 70% load)
Safety Approvals	• EN60601-1, UL60601-1, CSA22.2 No. 601-1 per cUL, CE Mark


Models and Ratings

Output Power	Output Voltage	Output Current	Total Regulation ⁽²⁾	Model Number ^(3, 4)
96 W	12 V	8.00 A	5%	AMM120PS12
105 W	15 V	7.00 A	5%	AMM120PS15
120 W	18 V	6.67 A	5%	AMM120PS18
120 W	19 V	6.32 A	5%	AMM120PS19
120 W	20 V	6.00 A	5%	AMM120PS20
120 W	24 V	5.00 A	5%	AMM120PS24
120 W	30 V	4.00 A	5%	AMM120PS30
120 W	36 V	3.34 A	5%	AMM120PS36
120 W	48 V	2.50 A	5%	AMM120PS48

Notes

1. Ripple and noise measured at 20 MHz bandwidth with a 10 μ F tantalum and 0.1 μ F ceramic cap connected at the measurement point.
2. Total regulation includes initial set accuracy, line and load regulation.
3. For class II versions, add '-C2' to model number e.g. AMM120PS24-C2.
4. For optional barrel jack connector add suffix 'B1' to model number e.g. AMM120PS24C2B1.

Mechanical Details

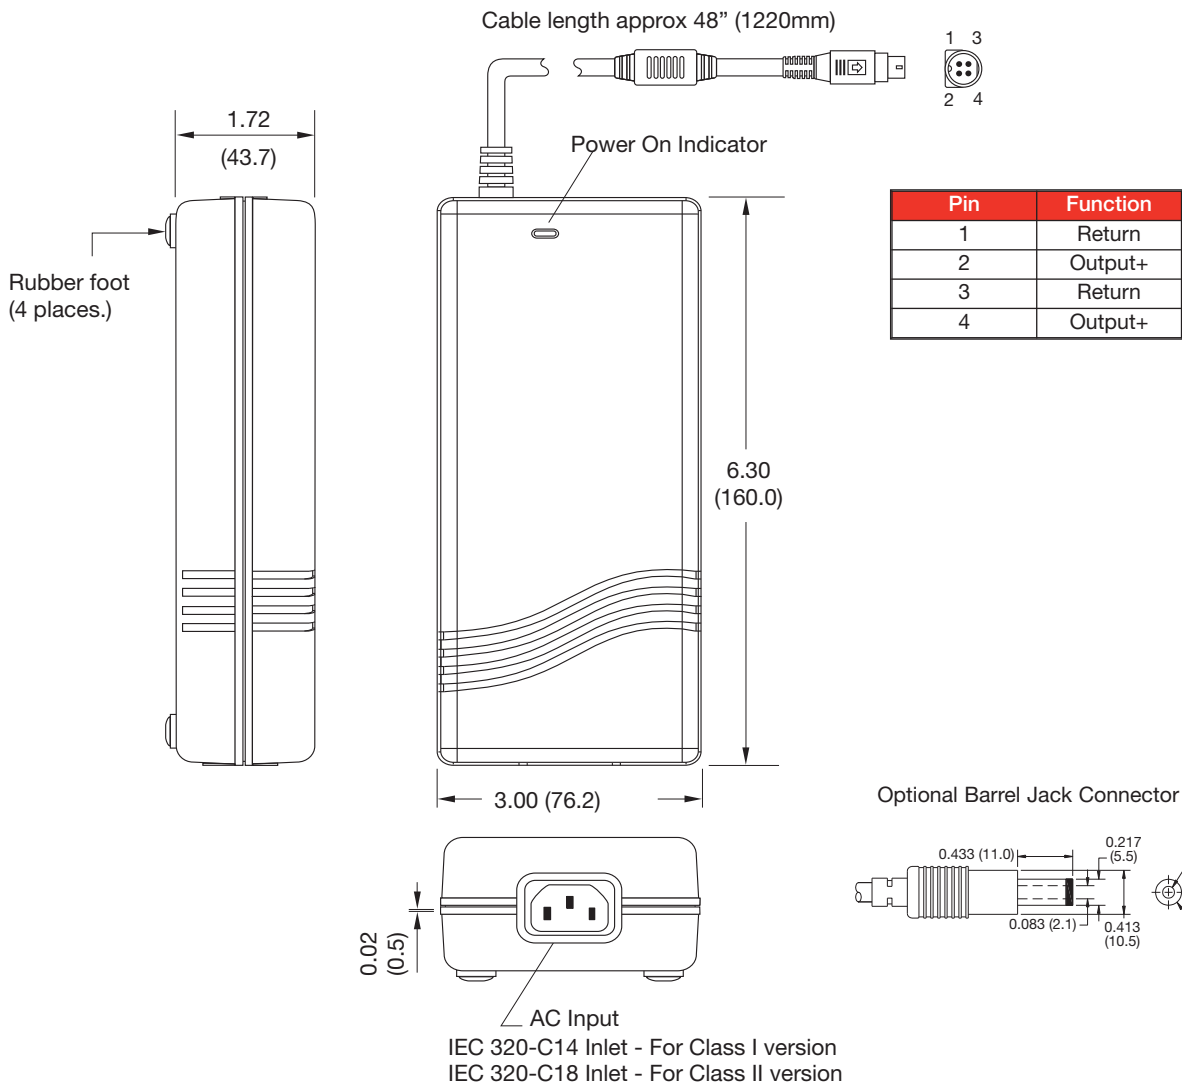

Notes

1. Dimensions shown in inches (mm). Tolerance is 0.02 (0.5) maximum, except output cable length.
2. Maximum load per pin on output connector is 5 A.
3. Output connector for 12 & 15 V models is KYCON KPPX-4P non-locking type. For mating half, use KYCON KPJX-4S-S or equivalent.
4. Output connector for 18 to 48 V models is KYCON KPPX-4P locking type. For mating half, use KYCON KPJX-4S-S or equivalent.
5. For Class I versions shell is connected to ground. For Class II versions shell is capacitively coupled to input.
6. Weight 1.72 lbs (780 g).