


MLB-3216-0060M4-N2

ELECTRICAL CHARACTERISTICS:

	Z @ 100MHz (Ohms)	DCR (Ohms)	Rated Current
Nominal	60		
Minimum	45		
Maximum	75	0.12	300mA


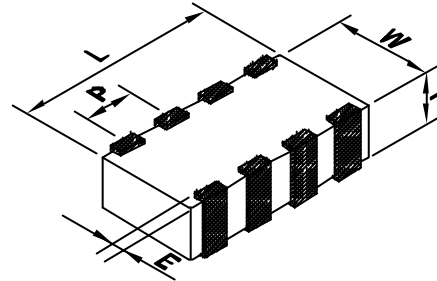


PHYSICAL DIMENSIONS:

L	3.200(0.126) ± 0.200(0.008)
W	1.600(0.063) ± 0.200(0.008)
T	0.800(0.031) ± 0.100(0.004)
P	0.800(0.031) ± 0.100(0.004)
E	0.300(0.012) ± 0.200(0.008)


NOTES: UNLESS OTHERWISE SPECIFIED

- 1.-All edges and corners must be rounded.
- 2.-Dimensions are in millimeters (inches)
- 3.-Taped and Reeled per current EIA specification.

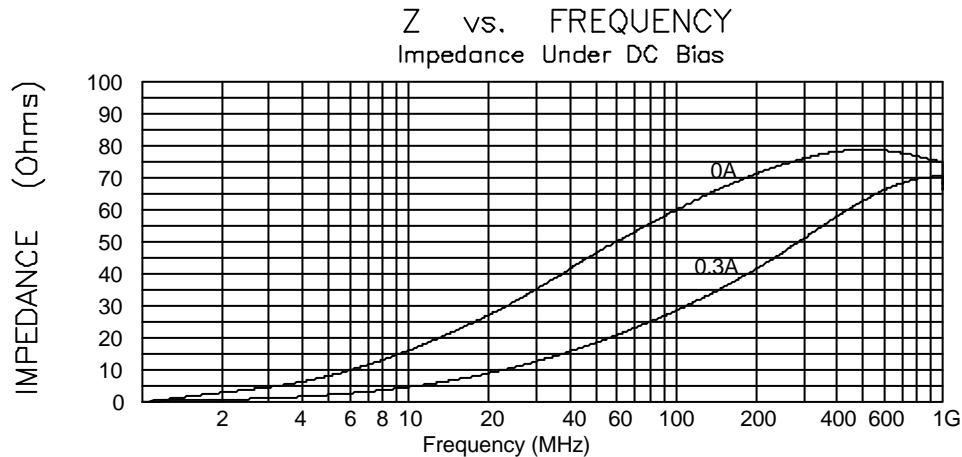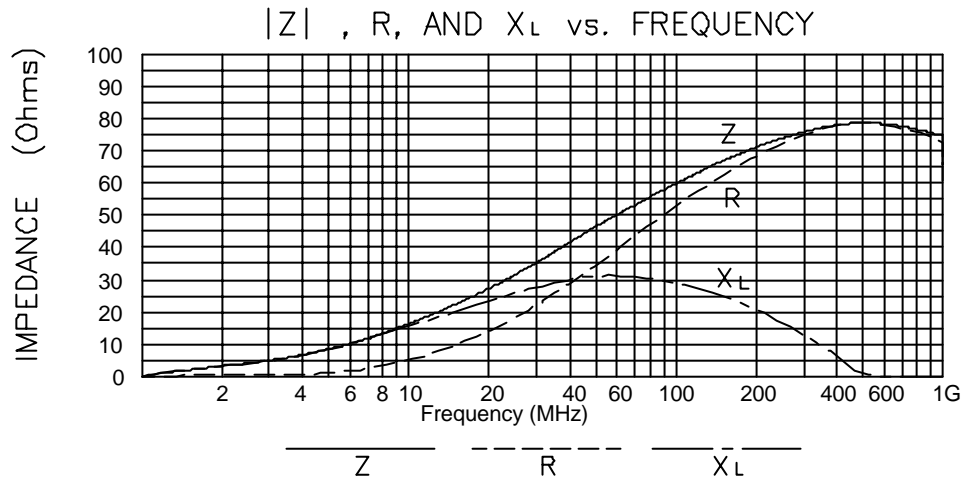

RECOMMENDED SOLDERING CONDITIONS

Reflow Soldering

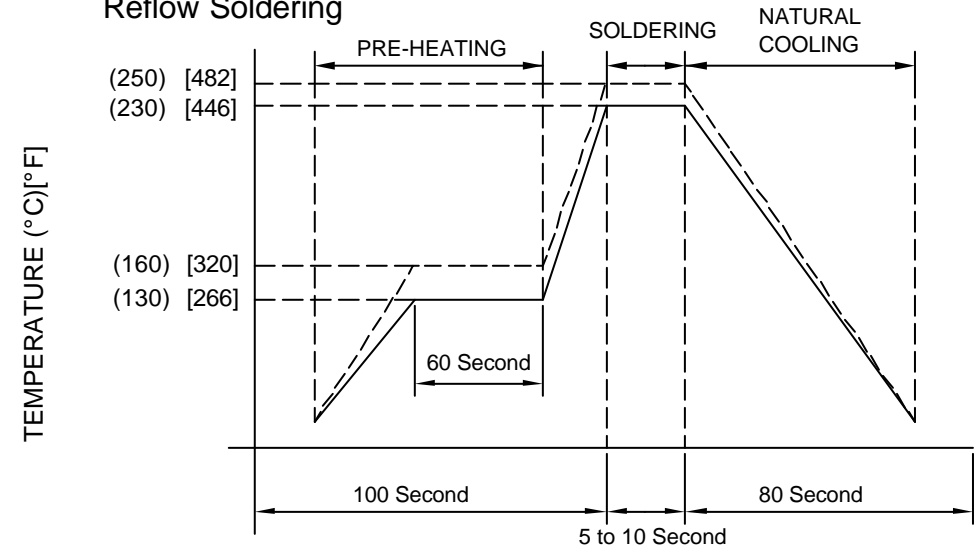

For Sn/Pb=63/37 solder _____

For lead free solder - - - - -

	APPROVER	DATE	28.07.2009
	M.Umezawa	CFM.	