

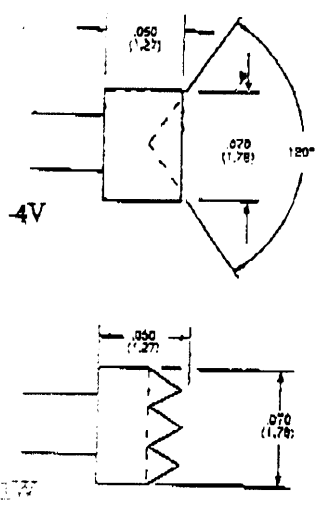
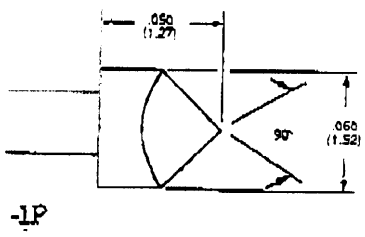
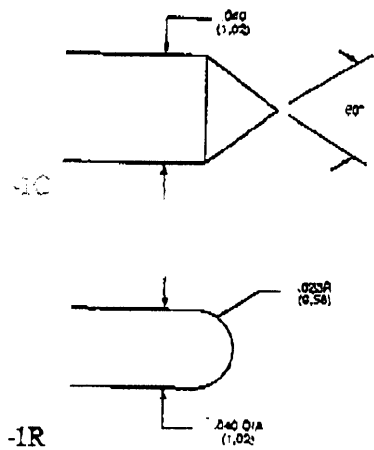


# P2664 Series

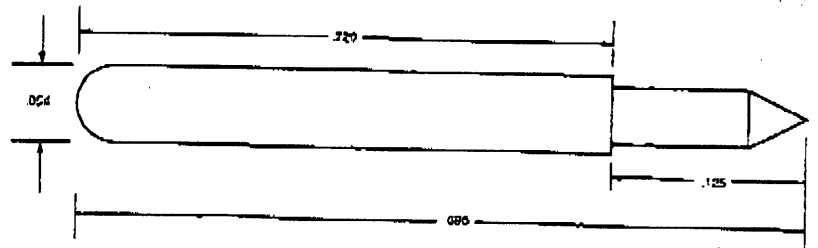

## P2664

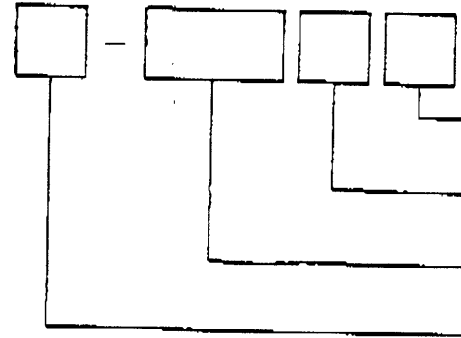

- S** STRAIGHT BODY
  - B** BANANA BEND
  - 1** STANDARD SPRING FORCE
  - 2** ALTERNATE SPRING FORCE
  - XX** HEADSTYLE (SEE CHART AT LEFT)
  - G** GOLD PLATED PLUNGER
  - R** RHODIUM PLATED PLUNGER
- \*MAKE TO ORDER

## SPECIFICATIONS

PLUNGER: .....	Hardened BeCu	ELECTRICAL RESISTANCE .....	<10mΩ
BODY: .....	Gold-lined nickel silver	MAXIMUM CURRENT .....	5 amps
SPRING: .....	Stainless steel		
BALL: .....	Stainless steel		

## SPRING FORCE

STANDARD .....	2.0 - 4.5oz
ALTERNATE .....	3.0 - 7.0oz

## POGO® SOCKET

The P2664 Series POGO is designed to be used with the S2664 Series Socket below. The recommended mounting hole size is .0714 / .0699.

