


NO	DESCRIPTION	DATE
①	REDUCE SPRING FROM 2 PCS TO 1 PC	06.06.97

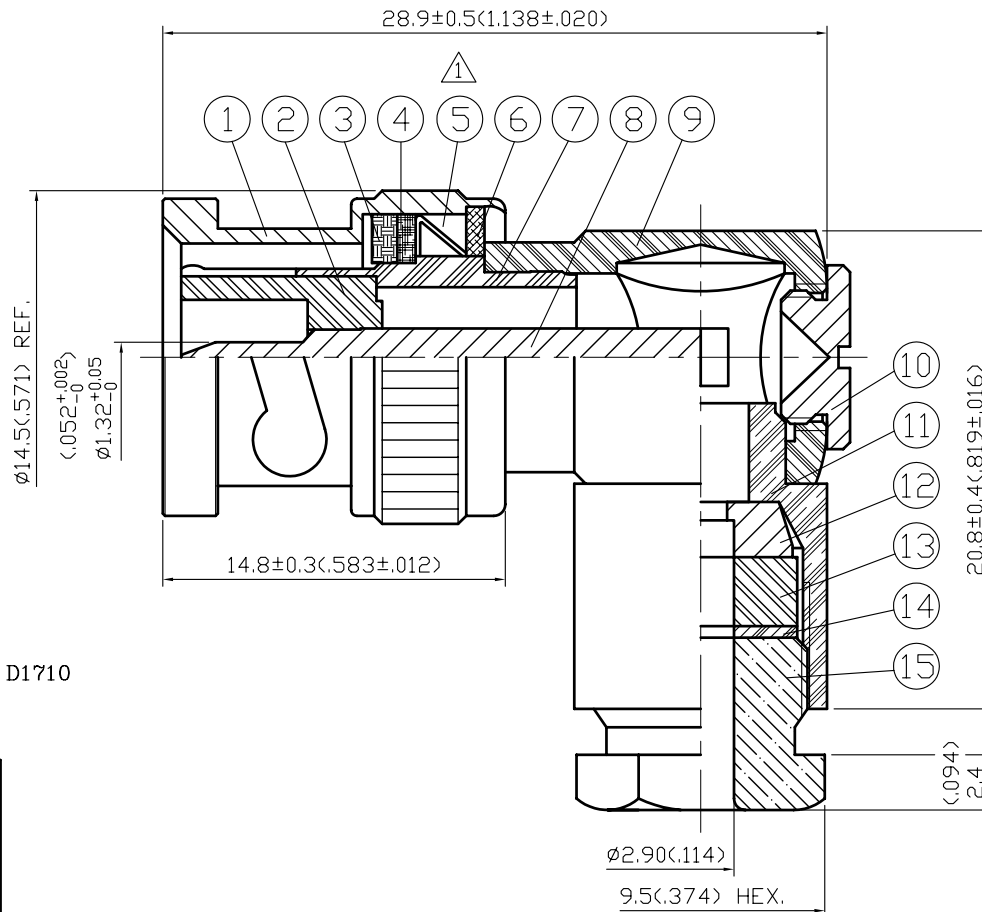

NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

15	NUT II	BRASS	1	NICKEL 100μ" MIN.
14	WASHER	BRASS	1	NICKEL 100μ" MIN.
13	GASKET	RUBBER	1	NONE
12	SLEEVE	BRASS	1	NICKEL 100μ" MIN.
11	CHASSIS	BRASS	1	NICKEL 100μ" MIN.
10	NUT I	BRASS	1	NICKEL 100μ" MIN.
9	BODY II	BRASS	1	NICKEL 100μ" MIN.
8	PIN	BRASS	1	GOLD
7	BODY I	BRASS	1	NICKEL 100μ" MIN.
6	WASHER	BRASS	1	NICKEL 100μ" MIN.
5	SPRING	SK-5	1	NICKEL 100μ" MIN.
4	WASHER	BRASS	1	NICKEL 100μ" MIN.
3	GASKET	RUBBER	1	NONE
2	INSULATION	TEFLON	1	NONE
1	SHELL	ZINC	1	NICKEL 100μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

①

製圖	DRAWN	TOLERANCE	品名	13-06-4 174.U (50Ω)	日期	DATE	版次	REV.
檢圖	CHECK	±0.1	單位	DWG.NO.	13-0404	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.		
認定	APPROVAL	±5°	比例	SCALE	4:1			