


© COPYRIGHT 1997 BY SPC TECHNOLOGY. ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO. SPC-FD05, Total Pages: 2						
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
09	A	RELEASED	J.W.M.	11/14/97	J.C.	11/14/97	B.B.	11/17/97
724	B	UV stabilized was Heat Stabilized	J.W.M.	3/10/99	J.C.	3/10/99		

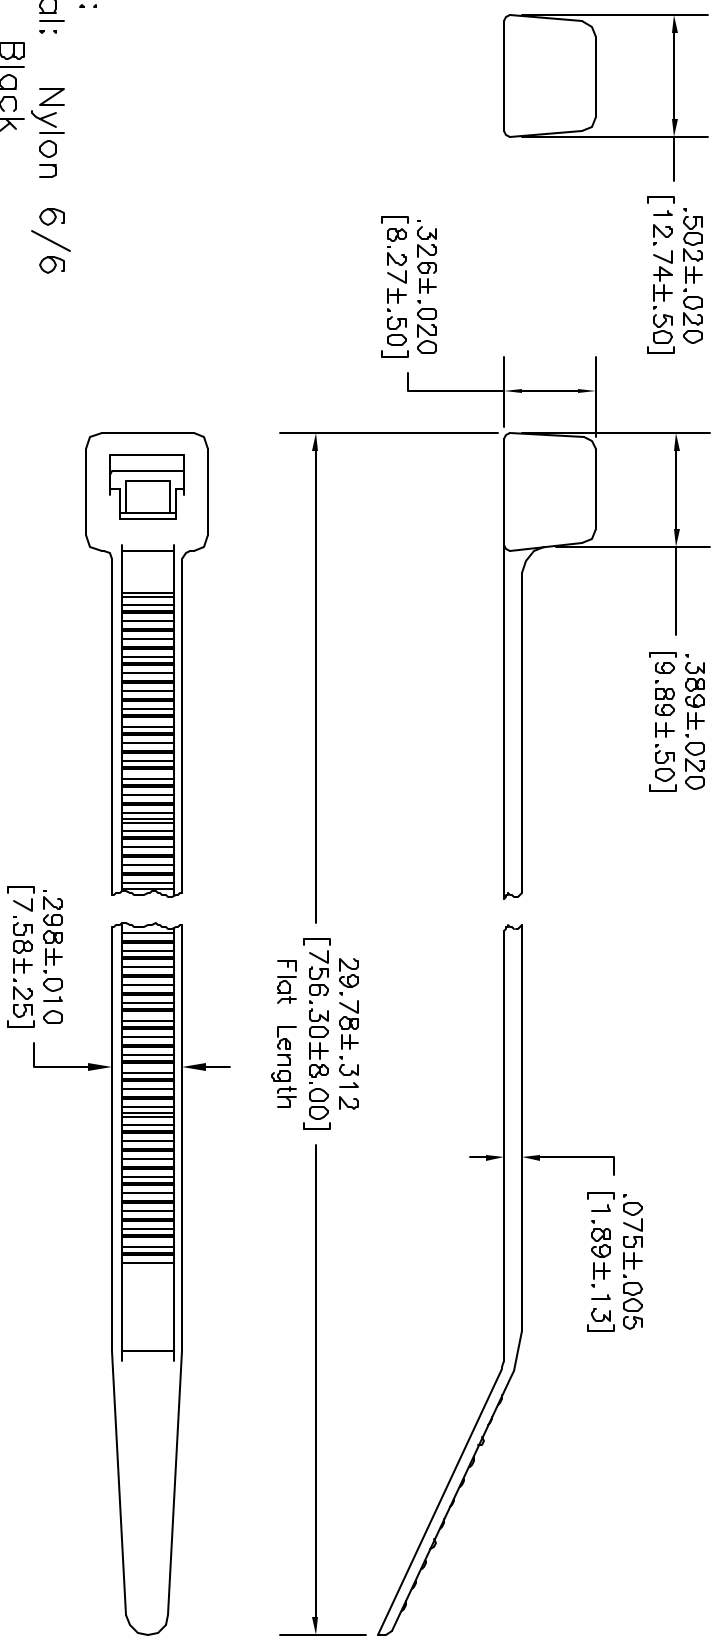

NOTES:
 Material: Nylon 6/6
 Color: Black
 Packed: 50 to bag
 Max. Bundle Dia: 8.750 [222.3]
 Min. Bundle Dia: .188 [4.76]
 Min. Loop Tensile Strength: 120lbs.

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

Drawers Other than Specified Dimensions are shown for reference only! Your own tests will determine the suitability of this product for your application.

DRAWN BY: Jeff McVicker	DATE: 11/14/97	DRAWING TITLE: Cable Tie -UV Stabilized
CHECKED BY: JOHN COLE	DATE: 11/14/97	
APPROVED BY: BRETT BRAATZ	DATE: 11/17/97	

SIZE: A DWG. NO.: 8409-0339 ELECTRONIC FILE: 16N829.DWG REV: B

SCALE: NTS U.O.M.: INCHES [mm] SHEET: 1 OF 1

SPC TECHNOLOGY
 2970100, LL 60040-4198