

DATA SHEET

**MMU 0102; MMA 0204;
MMB 0207
Precision MELF resistors**

Product specification
File under BCcomponents, BC08

2000 Sep 06

Precision MELF resistors

MMU 0102; MMA 0204; MMB 0207

FEATURES

- Advanced thin film technology
- Lowest TC: 15 to 25 ppm/K
- Precision tolerance of value: $\pm 0,1$ and $\pm 0,25\%$
- Superior overall stability: Class 0,05
- Wide precision range: 15 Ω to 1 M Ω
- Metric sizes:
 - DIN: 0102; 0204; 0207
 - CECC: RC 2211M; RC 3715M; RC 6123M

APPLICATIONS

- Test and measuring equipment
- Industrial and medical electronics.

DESCRIPTION

MMU 0102, MMA 0204 and MMB 0207 precision thin film MELF resistors combine the proven reliability of the professional products with an advanced level of precision and stability. Therefore they are perfectly suited for applications in the fields of test and measuring equipment along with industrial and medical electronics.

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade ceramic body (85% Al₂O₃, for MICRO-MELF: 96% Al₂O₃) and conditioned to achieve the desired temperature coefficient. Nickel plated steel termination caps are firmly pressed on the metallised rods. A special laser is used to achieve the target value by smoothly cutting a helical

groove in the resistive layer without damaging the ceramics. A further conditioning is applied in order to stabilise the trimming result. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating. Five colour code rings designate the resistance value and tolerance in accordance with **IEC 60062**.

The result of the determined production is verified by an extensive testing procedure performed on 100% of the individual resistors. Only accepted products are laid directly into the blister tape in accordance with **IEC 60 286-3**.

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapour phase. The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions.

The resistors are tested in accordance with **CECC 40401-803** which refers to **EN 140000 (IEC 60115-1)** and **EN 140400 (IEC 60 115-8)**.

BCcomponents BEYSCHLAG has achieved "**Approval of Manufacturer**" in accordance with **EN 100114-1**. The release certificate for "**Technology Approval Schedule**" in accordance with **CECC 240001** based on **EN 100114-6** is granted for the BCcomponents BEYSCHLAG manufacturing process.

On request, resistors are available with established reliability in accordance with **CECC 40 401-803 Version E**.

Precision MELF resistors**MMU 0102; MMA 0204;
MMB 0207****QUICK REFERENCE DATA**

DESCRIPTION	MMU 0102		MMA 0204		MMB 0207	
Metric CECC size	RC 2211M		RC 3715M		RC 6123M	
Resistance range	100 Ω to 221 k Ω		10 Ω to 332 k Ω		15 Ω to 1 M Ω	
Resistance tolerance	$\pm 0,25\%$; $\pm 0,1\%$; $\pm 0,5\%$				$\pm 0,25\%$; $\pm 0,1\%$	
Temperature coefficient	± 25 ppm/K; ± 15 ppm/K					
Operation mode	precision	standard	precision	standard	precision	standard
Climatic category (LCT/UCT/days)	10/85/56	55/125/56	10/85/56	55/125/56	10/85/56	55/125/56
Rated dissipation, P_{70}	0,06 W	0,2 W	0,07 W	0,25 W	0,11 W	0,4 W
Operating voltage, U_{\max} AC/DC	150 V		200 V		300 V	
Film temperature	85 $^{\circ}$ C	125 $^{\circ}$ C	85 $^{\circ}$ C	125 $^{\circ}$ C	85 $^{\circ}$ C	125 $^{\circ}$ C
Max. resistance change at P_{70} for resistance range, $\Delta R/R$ max., after:	100 Ω to 100 k Ω		100 Ω to 100 k Ω		100 Ω to 270 k Ω	
1 000 h	$\leq 0,05\%$	$\leq 0,25\%$	$\leq 0,05\%$	$\leq 0,25\%$	$\leq 0,05\%$	$\leq 0,25\%$
8 000 h	$\leq 0,1\%$	$\leq 0,5\%$	$\leq 0,1\%$	$\leq 0,5\%$	$\leq 0,1\%$	$\leq 0,5\%$
225 000 h	$\leq 0,3\%$	$\leq 1,5\%$	$\leq 0,3\%$	$\leq 1,5\%$	$\leq 0,3\%$	$\leq 1,5\%$
Specified lifetime	225 000 h		225 000 h		225 000 h	
Permissible voltage against ambient:						
1 minute	200 V		300 V		500 V	
continuous	75 V		75 V		75 V	
Failure rate	$\leq 2,0 \times 10^{-9}/h$		$\leq 0,7 \times 10^{-9}/h$		$\leq 0,7 \times 10^{-9}/h$	

Precision MELF resistors**MMU 0102; MMA 0204;
MMB 0207****Table 1** Temperature coefficient and resistance range

DESCRIPTION		RESISTANCE VALUE ⁽¹⁾		
T.C.	TOLERANCE	MMU 0102	MMA 0204	MMB 0207
±25 ppm/K	±0,25%	100 Ω to 221 kΩ	22 Ω to 332 kΩ	15 Ω to 1 MΩ
	±0,1%	100 Ω to 100 kΩ	43 Ω to 332 kΩ	33 Ω to 1 MΩ
±15 ppm/K	±0,5%	100 Ω to 100 kΩ	10 Ω to 221 kΩ	–
	±0,25%	100 Ω to 100 kΩ	22 Ω to 221 kΩ	–
	±0,1%	100 Ω to 100 kΩ	43 Ω to 221 kΩ	33 Ω to 1 MΩ

Note

1. Resistance values to be selected from E24 and E192 series, for other values please contact the factory.

Resistance ranges printed in bold are preferred T.C. / tolerance combinations with optimized availability.

Precision MELF resistors

**MMU 0102; MMA 0204;
MMB 0207**

ORDERING INFORMATION

Components may be ordered by using either a simple clear text ordering code, see "Type description and ordering code" or BCcomponents' unique 12NC.

Numeric Ordering code (12NC)

- The resistors have a 12-digit ordering code starting with 2312.
- The subsequent 4 digits indicate the resistor type, specification and packaging; see Table 2.
- The remaining 4 digits indicate the resistance value:
 - The first 3 digits indicate the resistance value.
 - The last digit indicates the resistance decade in accordance with Table 3.

Table 2 12NC ordering code indicating resistor type and packaging

DESCRIPTION			ORDERING CODE 2312						
			BLISTER TAPE ON REEL				BULK CASE		
TYPE	T.C.	TOL.	B1 1000 units	B2 2000 units	BL 3000 units	B7 7000 units	B0 10000 units	M3 3000 units	M8 8000 units
MMU 0102	±25 ppm/K	±0,25%	171 6....	–	166 6....	–	176 6....	–	061 6....
		±0,1%	171 7....	–	166 7....	–	176 7....	–	061 7....
	±15 ppm/K	±0,5%	172 5....	–	167 5....	–	177 5....	–	062 5....
		±0,25%	172 6....	–	167 6....	–	177 6....	–	062 6....
		±0,1%	172 7....	–	167 7....	–	177 7....	–	062 7....
MMA 0204	±25 ppm/K	±0,25%	141 6....	–	156 6....	–	146 6....	041 6....	–
		±0,1%	141 7....	–	156 7....	–	146 7....	041 7....	–
	±15 ppm/K	±0,5%	142 5....	–	157 5....	–	147 5....	042 5....	–
		±0,25%	142 6....	–	157 6....	–	147 6....	042 6....	–
		±0,1%	142 7....	–	157 7....	–	147 7....	042 7....	–
MMB 0207	±25 ppm/K	±0,25%	181 6....	196 6....	–	186 6....	–	–	–
		±0,1%	181 7....	196 7....	–	186 7....	–	–	–
	±15 ppm/K	±0,1%	182 7....	197 7....	–	187 7....	–	–	–

Resistance ranges printed in bold are preferred T.C. / tolerance combinations with optimized availability.

Precision MELF resistors

MMU 0102; MMA 0204; MMB 0207

Table 3 Last digit of 12NC indicating resistance decade


RESISTANCE DECADE	LAST DIGIT
1 Ω to 9,99 Ω	9
100 Ω to 999 Ω	1
1 k Ω to 9,99 k Ω	2
10 k Ω to 99,9 k Ω	3
100 k Ω to 999 k Ω	4
1 M Ω to 9,99 M Ω	5

ORDERING EXAMPLE

The ordering code of a MMA 0204 resistor, value 47 k Ω and TC 25 with $\pm 0,1\%$ tolerance, supplied in blister tape of 3000 units per reel is: 2312 156 74703.

Type description and ordering code

- We recommend that the clear text ordering code is used to minimize the possibility of errors in order handling.

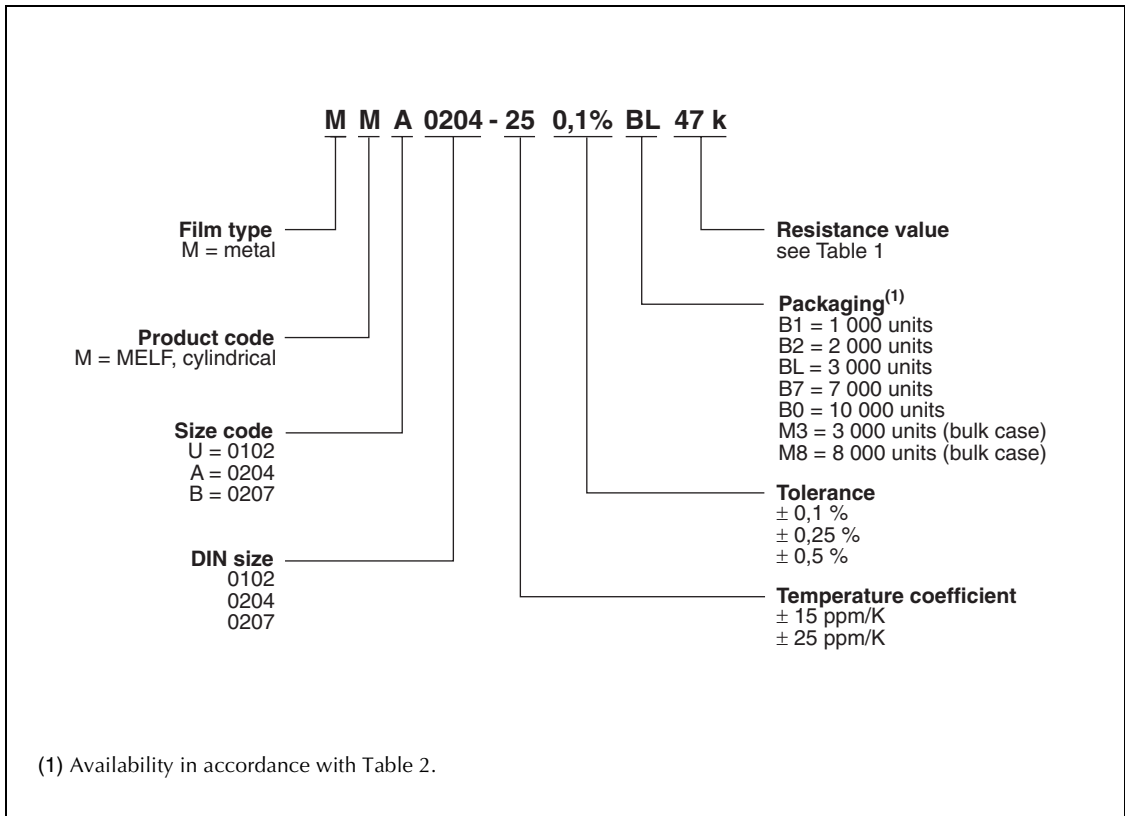

Precision MELF resistors

**MMU 0102; MMA 0204;
MMB 0207**

FUNCTIONAL DESCRIPTION

Derating

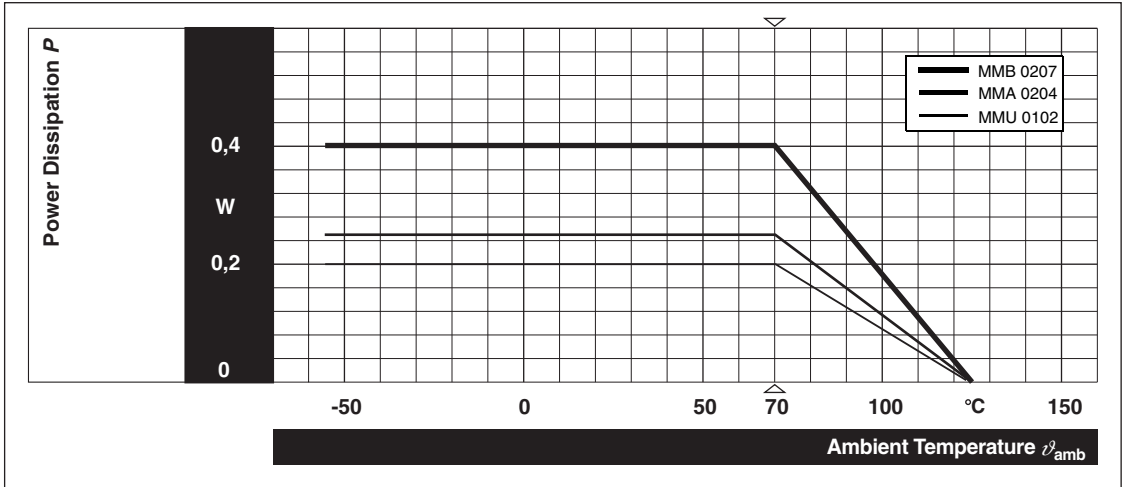


Fig.1 Derating, standard operation.

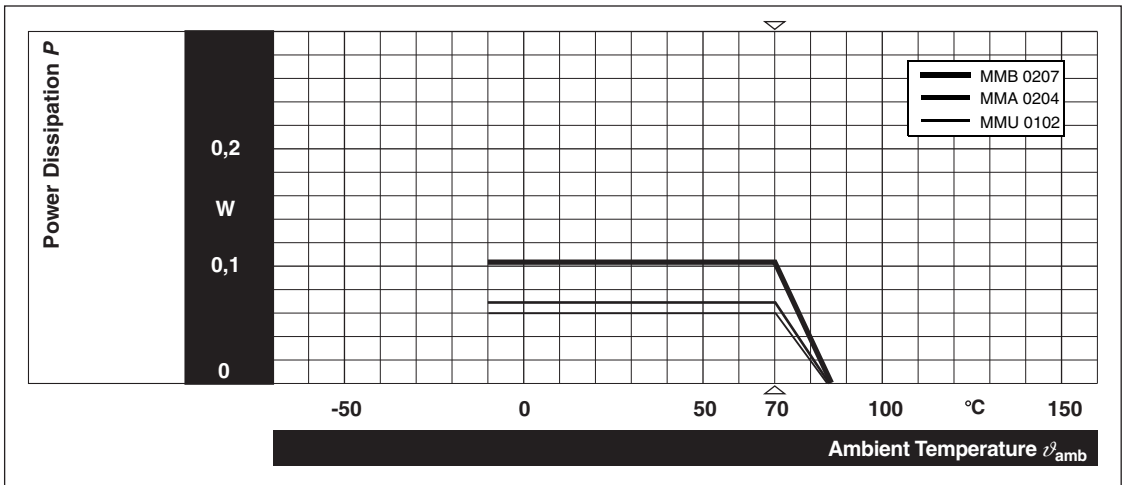


Fig.2 Derating, precision operation.

Precision MELF resistors

**MMU 0102; MMA 0204;
MMB 0207**

Current noise

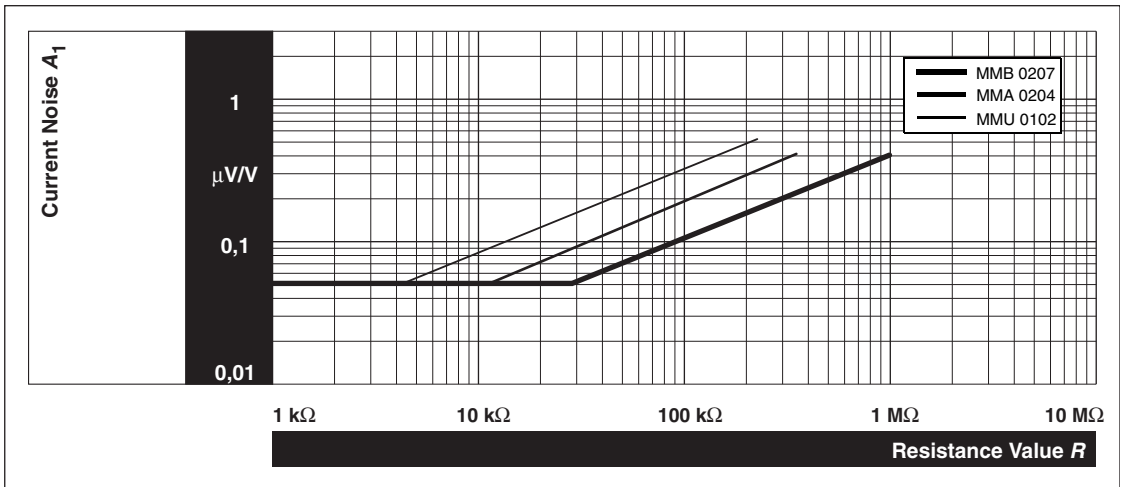



Fig.3 Current noise A_1 in accordance with IEC 60 195.

Precision MELF resistors

**MMU 0102; MMA 0204;
MMB 0207**

MECHANICAL DATA

Outlines

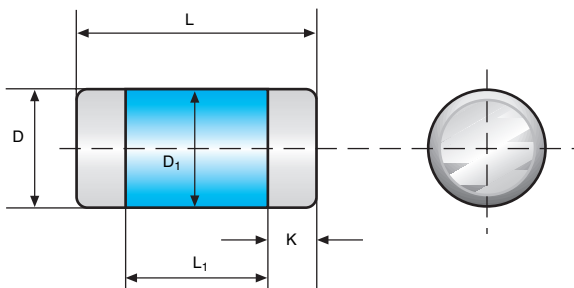

For dimensions see Table 4.

Fig.4 Outlines.

Table 4 MELF resistor types, mass and relevant physical dimensions; see Fig.4

TYPE	L (mm)	D (mm)	L ₁ min (mm)	D ₁ (mm)	K (mm)	MASS (mg)
MMU 0102	2,2 +0/-0,1	1,1 +0/-0,1	1,2	D +0/-0,04	0,4 ±0,05	7
MMA 0204	3,6 +0/-0,2	1,4 +0/-0,1	1,8	D +0/-0,15	0,8 ±0,1	19
MMB 0207	5,8 +0/-0,2	2,2 +0/-0,2	2,8	D +0/-0,2	1,2 ±0,2	79

Precision MELF resistors

**MMU 0102; MMA 0204;
MMB 0207**

TESTS AND REQUIREMENTS

Essentially all tests are carried out in accordance with the following specifications:

EN 140000 / IEC 60115-1, Generic specification (includes tests)

EN 140400 / IEC 60115-8, Sectional specification (includes schedule for qualification approval)

CECC 40401-803, Detail specification (includes schedule for conformance inspection)

Most of the components are approved in accordance with the European CECC-system, where applicable. Table 5 contains only the most important tests. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202.

The tests are carried out in accordance with IEC 60068 and under standard atmospheric conditions in accordance with IEC 60068-1, 5.3. Climatic category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper Category Temperature; damp heat, long term, 56 days) is valid.

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45% to 75%

Air pressure: 86 kPa to 106 kPa (860 mbar to 1 060 mbar).

For testing the components are mounted on a test board in accordance with IEC 60115-1, 4.31 unless otherwise specified.

In Table 5 only the tests and requirements are listed with reference to the relevant clauses of IEC 60115-1 and IEC 60 068-2; a short description of the test procedure is also given.

Table 5 Test procedures and requirements

IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE ($\Delta R/R$)		
				STABILITY CLASS 0,05	STABILITY CLASS 0,1	STABILITY CLASS 0,25
			stability for product types:			
			MMU 0102	100 Ω to 100 k Ω	43 Ω to 147 k Ω	10 Ω to 221 k Ω
			MMA 0204	100 Ω to 100 k Ω	43 Ω to 221 k Ω	10 Ω to 332 k Ω
			MMB 0207	100 Ω to 270 k Ω	43 Ω to 510 k Ω	15 Ω to 1 M Ω
4.5	–	resistance	–	$\pm 0,5\%$; $\pm 0,25\%$; $\pm 0,1\%$		
4.8.4.2	–	temperature coefficient	at 20 / –55 / 20 °C and 20 / 125 / 20 °C	± 25 ppm/K, ± 15 ppm/K		
4.25.1	–	endurance; precision operation mode	room temperature; $U = \sqrt{P_{70} \times R}$ $\leq U_{\max}$; 1,5 h on; 0,5 h off; 70 °C; 1000 h	$\pm(0,05\% + 10 \text{ m}\Omega)$	$\pm(0,1\% + 10 \text{ m}\Omega)$	–
			70 °C; 8000 h	$\pm(0,1\% + 10 \text{ m}\Omega)$	$\pm(0,2\% + 10 \text{ m}\Omega)$	–
		endurance; standard operation mode	room temperature; $U = \sqrt{P_{70} \times R}$ $\leq U_{\max}$; 1,5 h on; 0,5 h off; 70 °C; 1000 h	–	–	$\pm(0,25\% + 50 \text{ m}\Omega)$
			70 °C; 8000 h	–	–	$\pm(0,5\% + 50 \text{ m}\Omega)$

Precision MELF resistors

MMU 0102; MMA 0204;
MMB 0207

IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE ($\Delta R/R$)		
				STABILITY CLASS 0,05	STABILITY CLASS 0,1	STABILITY CLASS 0,25
			stability for product types:			
			MMU 0102	100 Ω to 100 k Ω	43 Ω to 147 k Ω	10 Ω to 221 k Ω
			MMA 0204	100 Ω to 100 k Ω	43 Ω to 221 k Ω	10 Ω to 332 k Ω
			MMB 0207	100 Ω to 270 k Ω	43 Ω to 510 k Ω	15 Ω to 1 M Ω
4.25.3	–	endurance at upper category temperature	85 °C; 1000 h 125 °C; 1000 h	$\pm(0,05\% + 10 \text{ m}\Omega)$ –	$\pm(0,1\% + 10 \text{ m}\Omega)$ –	$\pm(0,1\% + 50 \text{ m}\Omega)$ $\pm(0,25\% + 50 \text{ m}\Omega)$
4.24	3 (Ca)	damp heat, steady state	40 ± 2 °C; 56 days; 93 $\pm 2/-3\%$ RH	$\pm(0,05\% + 10 \text{ m}\Omega)$	$\pm(0,1\% + 10 \text{ m}\Omega)$	$\pm(0,25\% + 50 \text{ m}\Omega)$
4.23		climatic sequence:				
4.23.2	2 (Ba)	dry heat	UCT; 16 h			
4.23.3	30 (Db)	damp heat, cyclic	55 °C; 24 h; $\geq 90\%$ RH; 1 cycle			
4.23.4	1 (Aa)	cold	LCT; 2 h			
4.23.5	13 (M)	low air pressure	8,5 kPa; 2 h; 25 ± 10 °C			
4.23.6	30 (Db)	damp heat, cyclic	55 °C; 24 h; $\geq 90\%$ RH; 5 cycles LCT = -10 °C; UCT = 85 °C LCT = -55 °C; UCT = 125 °C	$\pm(0,05\% + 10 \text{ m}\Omega)$ no visible damage –	$\pm(0,1\% + 10 \text{ m}\Omega)$ no visible damage –	– $\pm(0,25\% + 50 \text{ m}\Omega)$ no visible damage
–	1 (Aa)	cold	-55 °C; 2 h	$\pm(0,01\% + 10 \text{ m}\Omega)$	$\pm(0,02\% + 10 \text{ m}\Omega)$	$\pm(0,05\% + 10 \text{ m}\Omega)$
4.13	–	short time overload; standard operation mode	room temperature; $U = 2,5 \times \sqrt{P_{70} \times R}$ $\leq 2 \times U_{\max}$; 5 s	$\pm(0,01\% + 10 \text{ m}\Omega)$ no visible damage	$\pm(0,02\% + 10 \text{ m}\Omega)$ no visible damage	$\pm(0,05\% + 10 \text{ m}\Omega)$ no visible damage
4.19	14 (Na)	rapid change of temperature	30 minutes at -55 °C; 30 minutes at 125 °C; 5 cycles	$\pm(0,01\% + 10 \text{ m}\Omega)$ no visible damage	$\pm(0,02\% + 10 \text{ m}\Omega)$ no visible damage	$\pm(0,05\% + 10 \text{ m}\Omega)$ no visible damage
4.29	45 (XA)	component solvent resistance	isopropyl alcohol; +23 °C; toothbrush method	marking legible; no visible damage		

Precision MELF resistors**MMU 0102; MMA 0204;
MMB 0207**

IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE ($\Delta R/R$)		
				STABILITY CLASS 0,05	STABILITY CLASS 0,1	STABILITY CLASS 0,25
			stability for product types:			
			MMU 0102	100 Ω to 100 k Ω	43 Ω to 147 k Ω	10 Ω to 221 k Ω
			MMA 0204	100 Ω to 100 k Ω	43 Ω to 221 k Ω	10 Ω to 332 k Ω
			MMB 0207	100 Ω to 270 k Ω	43 Ω to 510 k Ω	15 Ω to 1 M Ω
4.18.2	58 (Td)	resistance to soldering heat	solder bath method; 260 \pm 5 $^{\circ}$ C; 10 \pm 1 s	\pm (0,01% + 10 m Ω) no visible damage	\pm (0,02% + 10 m Ω) no visible damage	\pm (0,05% + 10 m Ω) no visible damage
4.17.2	58 (Td)	solderability	solder bath method; 215 $^{\circ}$ C; 3 s	good tinning (\geq 95% covered); no visible damage		
4.32	21 (Ue ₃)	shear (adhesion)	5 N; 10 s	no visible damage		
4.7	–	voltage proof	U_{rms} = 100 V; 60 s	no flashover or breakdown		